




## Chacon FE-05 IP WiFi Camera User Guide

[Home](#) » [CHACON](#) » Chacon FE-05 IP WiFi Camera User Guide 

### Chacon FE-05 IP WiFi Camera User Guide




1. Packing list
2. Product description
3. Device configuration
4. Legal notice

## Contents


- [1 Packing list](#)
- [2 Product description](#)
- [3 Camera configuration](#)
- [4 Specifications](#)
- [5 Documents / Resources](#)
  - [5.1 References](#)
- [6 Related Posts](#)

## Packing list


- Camera 1X

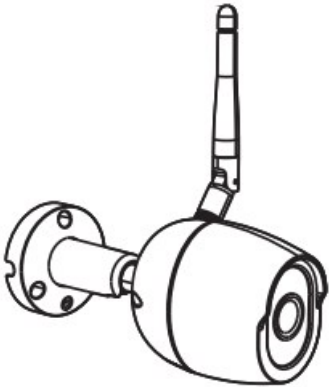


- Power adapter (EU) 1X

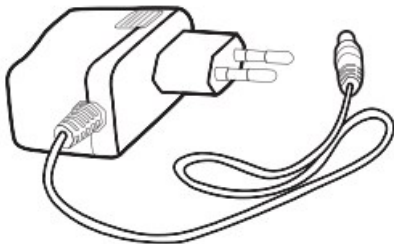

- Quick start guide 1X



## Product description

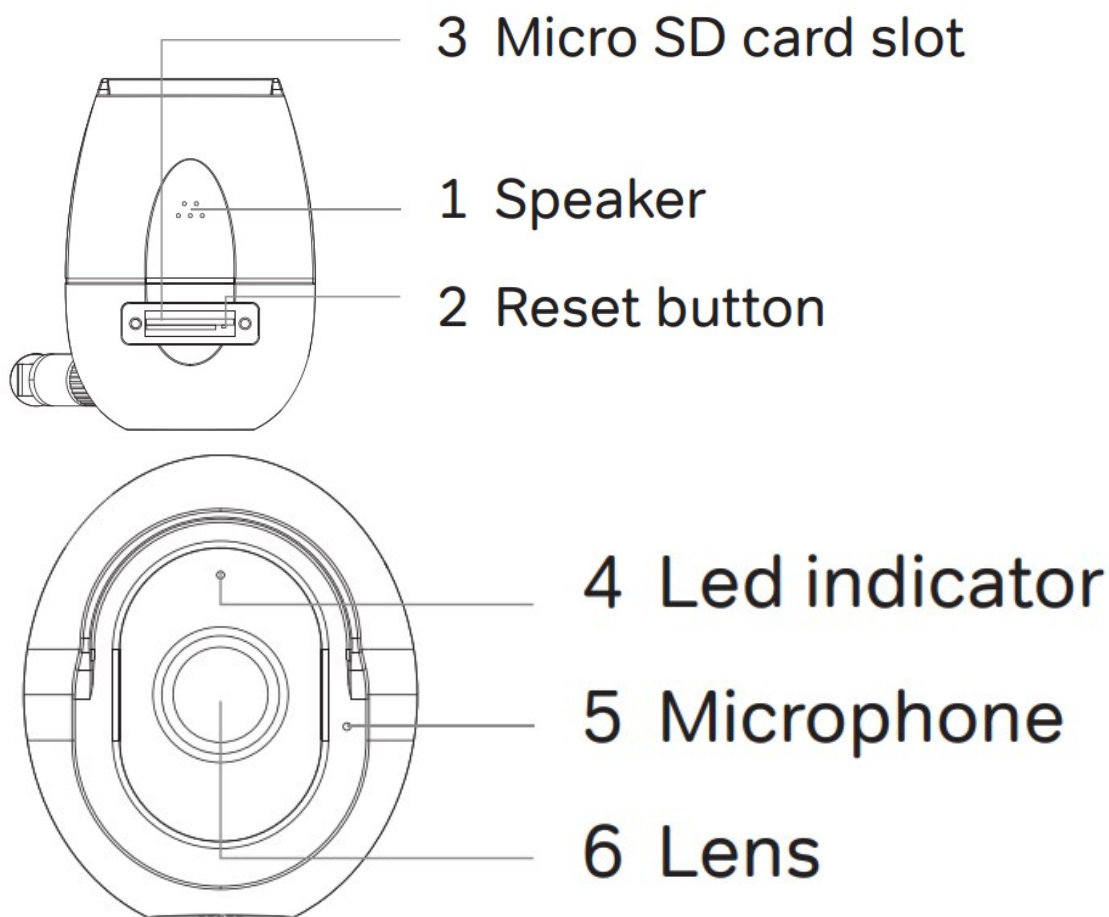

### Notice

To reset the device, press and hold the reset button for 5 seconds.

The camera beeps when the operation is complete.

|                           |                          |
|---------------------------|--------------------------|
| Flashing red light (slow) | Waiting configuration    |
| Flashing red light (fast) | Searching WiFi network   |
| Fix blue light            | Camera connected to WiFi |
| Flashing blue light       | Access point mode        |

### Camera configuration


**Step 1** Turn on your camera by plugging in the power adapter.

**Step 2** Connect your smartphone to the Wi-Fi network.

**Step 3** Download My Chacon app from the Apple Store or Android Play Store depending on your device.

**Step 4** Launch My Chacon app and sign up for the first use.

**Step 5** Follow the steps below to add your camera, then follow the on-screen instructions.

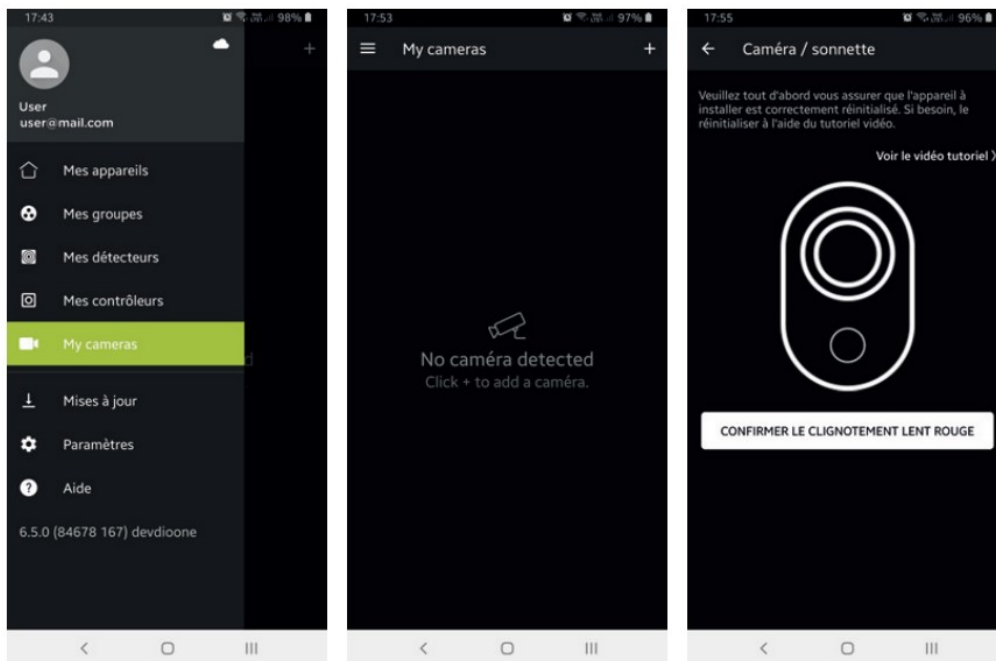

## Note

- If you have multiple cameras, please follow step 5 again to add devices one by one.
- To change Wi-Fi network, please restore the camera to= factory settings and follow step 5 to add the camera.

For more information, please download the user manual at [www.chacon.com](http://www.chacon.com)

## Specifications

|                   |                               |
|-------------------|-------------------------------|
| Sensor type       | 1/3" CMOS                     |
| Min. Brightness   | Color 0.01Lux@F1.2            |
|                   | Black and white 0.001Lux@F1.2 |
| Resolution        | 2 Mega pixels                 |
| Lens              | 4mm F2.0                      |
| Shutter           | 1/25~1/100,000 per second     |
| Infrared          | High power LED with ICR       |
| Infrared distance | 10 mètres                     |
| Video compression | H.264                         |
| Bit rate          | 32Kbps~2Mbps                  |
| Max resolution    | 1920 × 1080                   |
| Framerate         | 1~25 per second               |
| Picture settings  | Support HD/SD;support flip;   |
| Stora             | SD card(Max 128G)             |
| Audio             | Two-way audio                 |

|                              |                       |
|------------------------------|-----------------------|
| Protocols                    | HTTP,DHCP,DNS,RTSP    |
| WiFi standard                | IEEE802.11b/g/n       |
| Frequency                    | 2.4 GHz ~ 2.4835 GHz  |
| Bandwidth                    | 20/40MHz              |
| WiFi encryption              | WPA-PSK/WPA2-PSK      |
| Security                     | AES128                |
| Working temperature          | 20°C~50°C             |
| IP protection                | IP65                  |
| Power                        | DC12V 1A              |
| Consumption                  | 4.5W MAX              |
| Size(mm)                     | 169x172x62            |
| Model                        | KA1201A-1201000EU /   |
|                              | DCT12W120100EU-A0     |
| Input voltage                | 100-240Vac 100-240Vac |
| input frequency              | 50-60Hz 50-60Hz       |
| Output voltage               | +12,0 Vdc 12,0 Vdc    |
| Output current               | 1,0 A 1,0 A           |
| Output power                 | 12,0 W                |
| Average active efficiency    | 83,81%                |
| Efficiency at low load (10%) | 82,88%                |
| No-load Consumption          | < 0.06W               |

## Support

[www.chacon.com/support](http://www.chacon.com/support)

## Symbols

— — — Direct current (DC)



Don't throw batteries or out of order products with the household waste (garbage). The dangerous substances that they are likely to include may harm health or the environment. Make your retailer take back these products or use the selective collect of garbage proposed by your city.




Hereby, Chacon, declares that the radio equipment type 'IPCAM-FE05' is in compliance with the Directive 2014/53/EU.

The full test of the EU declaration of conformity is available at the following Internet address:





<http://chacon.com/conformity>



## Documents / Resources

|   |   |
|---|---|
|  | <p><a href="#">Chacon FE-05 IP WiFi Camera</a> [pdf] User Guide<br/>KA1201A-1201000EU, DCT12W120100EU-A0, FE-05, FE-05 IP WiFi Camera, IP WiFi Camera , WiFi Camera, Camera</p> |
|---|---|

## References

-  [Downloads](#)
-  [con.com](#)
-  [Shop for Chacon and Dio products](#)
-  [Contact us](#)

[Manuals+](#).