



# chois TECHNOLOGY XPG300Y X-Pointer Wireless Pointer Presenter Instruction Manual

[Home](#) » [chois TECHNOLOGY](#) » [chois TECHNOLOGY XPG300Y X-Pointer Wireless Pointer Presenter Instruction Manual](#) 

## X-pointer Manual ( XPG300Y )

### Contents

- [1 CAUTION](#)
- [2 Composition & Function](#)
- [3 Installation](#)
- [4 The Usage of X-pointer](#)
- [5 Features](#)
- [6 The Usage of Magic key](#)
- [7 Specifications](#)
- [8 Certification & Regulatory Compliance Information](#)
- [9 Support](#)
- [10 Warranty](#)
- [11 Documents / Resources](#)
- [12 Related Posts](#)

### CAUTION



LASER RADIATION. DO NOT STARE INTO THE BEAM OR VIEW DIRECTLY WITH OPTICAL INSTRUMENTS.  
CLASS II LASER PRODUCT.

NEVER POINT A LASER BEAM INTO A PERSON'S EYES OR VIEW A LASER BEAM DIRECTLY, AS PROLONGED EXPOSURE CAN BE HAZARDOUS TO THE EYES.

MOMENTARY EXPOSURE FROM A LASER POINTER, SUCH AS AN INADVERTENT SWEEP OF THE LIGHT ACROSS A PERSON'S EYES, MAY CAUSE TEMPORARY FLASH BLINDNESS SIMILAR TO THE EFFECT OF A CAMERA FLASHBULB. ALTHOUGH THIS CONDITION IS TEMPORARY, IT CAN BECOME MORE DANGEROUS IF THE EXPOSED PERSON IS ENGAGED IN A VISION-CRITICAL ACTIVITY SUCH AS DRIVING.


MODIFICATION OF THIS DEVICE MAY RESULT IN HAZARDOUS RADIATION EXPOSURE. FOR YOUR SAFETY, HAVE THIS EQUIPMENT SERVICED ONLY BY AN CHOISTECHNOLOGY AUTHORIZED SERVICE PROVIDER.

### **“Notice”**

For accidents caused by users, carelessness is not compensation.  
Please keep in mind that the below notice.

1. Do not stare into the laser beam.
2. Do not aim the laser at people.
3. Keep out of reach of children.
4. Any changes or modifications to the controller could void your authority to operate the equipment.
5. Do not place the controller in a location where it is subject to direct sunlight or extreme heat.
6. If any solid object or liquid falls onto the controller, disconnect it and have it checked by qualified personnel.
7. The controller is capable of operation between 10~40°C and storage between -10~50°C.
8. Please pay attention not to lose the receiver.

### **Composition & Function**

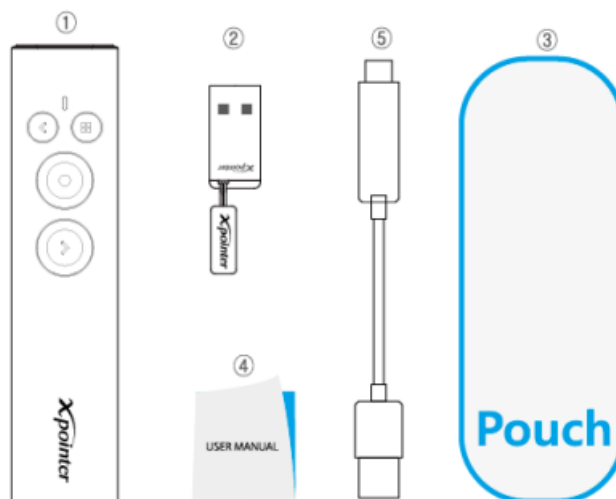


[ Composition ]

Name	Q'ty
① Transmitter	1EA
② Receiver	1EA
③ Pouch	1ea
④ Manual	1EA
⑤ Charger cable	1EA

**[ Table1 ]**

**Notice:** Composition and Function might be changed without warning for upgrading


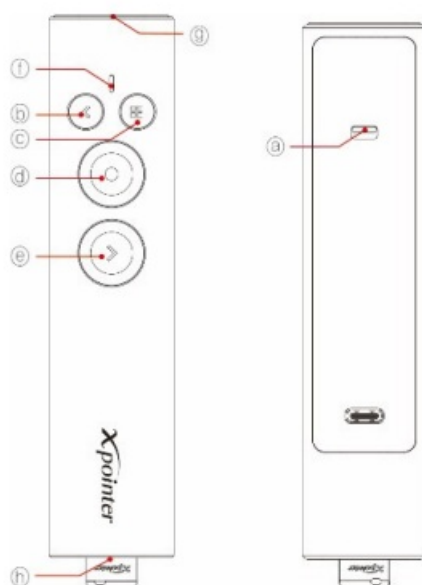


**[ Function ]**

Part	Name	Function	Function
	MODE		Moving Mouse Pointer and Click
	Left Button		Previous Page / Page Up
	IMAGE POINTER		Switching image pointer style
	Touch mouse		Moving mouse pointer or laser on
	Right Button		Next Page / Page Down
	Transmitter LED		Laser Pointing and Battery Check
	Mode Button		Selecting Keyboard / Mouse Mode
	Power Switch		Power On / Off

## Installation


1. Plug the receiver into the computer USB port.
2. Wait until the LED( ) of the receiver flickers regularly.
3. If the LED( ) of the receiver flickers, it means that the product is correctly recognized.
4. Push slide show, task switch, or left, right button of the transmitter for more than 2 seconds.  
After stopping flickering, recognizing is completed.
5. Open PowerPoint and push the transmitter's buttons. And then check [table1].
6. In case of failure in working [table1], a separate receiver from the USB port. And insert the receiver into USB port again. Repeat the process above.

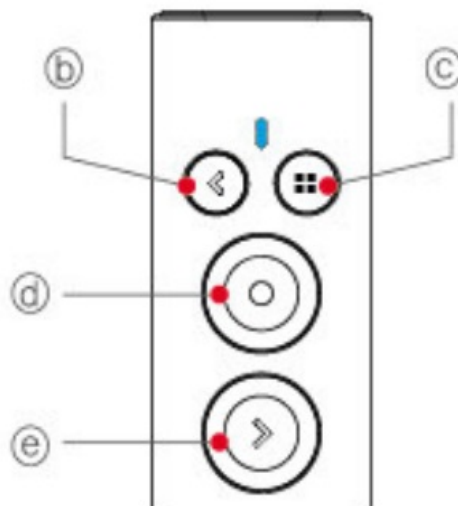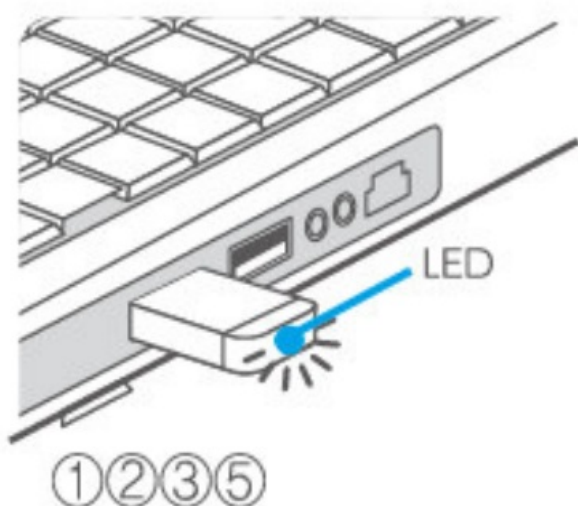

## The Usage of X-pointer

### 1) Presentation operation

- ① Open the presentation file.
- ② Move mode switch( ), and mode will change into “Image pointer mode”.
- ③ Run slide show.
- ④ Users can give a presentation effectively as they can move pages with the left or right button( , ) of the transmitter.

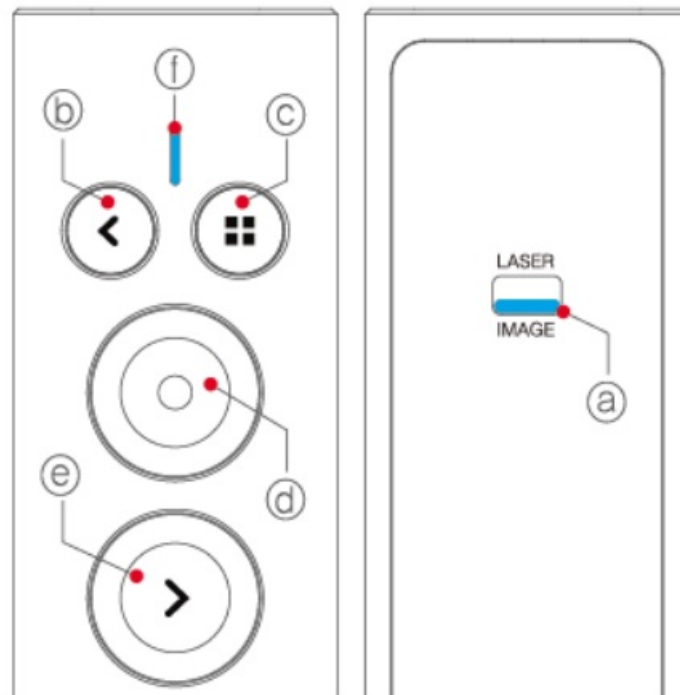

## Features

### 1. Magic Key function

The magic key allows users to use X-pointer for any program.

Users can give a presentation and also can remotely control the media player, acrobat reader, photo viewer, Winamp, etc.

### 2. Optical finger mouse

The optical finger mouse has the same functionality as the touchpad of a laptop computer.

Optical finger mouse controls offer greater functionality with delicate mouse control.

### 3. Drawing a line

Using “Drag&Drop” in mouse mode, the user can draw a line in PowerPoint.

### 4. High-quality laser

High-quality laser modules give you excellent definitions and precise pointing.

It applies suitable circuits to Korea, the EU, Japan, and America.

### 5. 2.4GHz Multi-Channel

2.4GHz Bluetooth 4.0LE technology by GFSK modulation utilizes 40 channels and 65,536 IDs which can reduce interference from the other RF devices or the other X-pointers.

### 6. Power sleep mode

If you push the laser button for more than 20seconds, it turns off automatically.

In case the transmitter doesn't work for a fixed time (1second), it turns to the power-saving mode.  
It prevents the unnecessary loss of the batteries.

### The Usage of Magic key

X-pointer's function will be changed as the user demands.  
Users can use X-pointer as remote control of media player, word, Winamp, etc.  
Key values are saved in X-pointer and you can use them anywhere.

1. Magic key program can be downloaded from : <http://www.x-pointer.com> (Download : Home -> support -> Download)
2. Insert the receiver into the USB port, and then complete awareness of ID.
3. Start -> Program -> ChoisTechnology -> Magic key.
4. Select the item to use on the initial screen and click 'OK'.
5. Enter customized key values in each button and click 'OK'.
6. Key values are saved in the receiver and you can use the changed function.



[ Choice of model ]



[ Assignment of key ]

### Specifications

1. Transmitter

Frequency Used	2.402~ 2.480GHz
Channels Used	40 channel
Recognizable ID's	65,536

Operational Distance	Max. 50m(Open Field)
RF Power	less than 10mW
Modulation	GFSK
Operating Temperature	10-40°C
Laser Type	Class)II
Laser Output	less than 1mW
Laser Wavelength (Color)	515nm(GREEN)
Current Consumption	less than 20mA
Number of Buttons	4 buttons, 1 slide switch
Battery	3.7V Li-polymer Battery
Size	130 X 30 X 13 mm
Weight	47g(with Li-polymer battery)
Hours of Continuous Use	15 hours

## 2. Receiver

Interface	USB 1.1 / 2.0
Power	5V(USB Power)
Operating System	Windows 2000, XP, Vista, 7, Mac OS X
Consumption Current	less than 23mA
Operating Temperature	-10-50°C
Size	26 X 12 X 4.5 mm
Weight	2g

## Certification & Regulatory Compliance Information

### 1. Product Name (Model Name)

Transmitter: XPG300Y

Receiver: XPR-AT2

### 2. Certification Number

FCC ID: RVBXP300Y

**C E 0678**

### 3. Manufacturer / Nation : ChoisTechnology Co., Ltd. / Korea,China

### 4. Regulatory Compliance

FCC Compliance Statement

**FCC Part 15.19**

This device complies with part 15 of the FCC Rules.  
Operation is subject to the following two conditions :

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

### FCC Part 15.21

Any changes or modifications (including the antennas) made to this device that are not expressly approved by the manufacturer may void the user's authority to operate the equipment.

### RF Exposure Statement (2.1091)

FCC RF Radiation Exposure Statement: This equipment complies with FCC RF Radiation exposure limits set forth for an uncontrolled environment. This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

### Part 15.105 (B)

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.



However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures :

- Reorient or relocate the receiving antenna.
- Increase this parathion between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not authorized by the party responsible for compliance could void the user’s authority to operate this product.


Support

If there are some problems or something to improve while using the product, please contact us.  
We will consult about it kindly.  
E-mail : [inquiry@choistec.com](mailto:inquiry@choistec.com)  
TEL : +82-32-246-3409, FAX : +82-2-6455-3406  
Homepage : <http://www.x-pointer.com>  
Company Name : ChoisTechnology Co., Ltd.

Warranty

ChoisTechnology warrants this product to be free from defects in materials and workmanship for one year. If your ChoisTechnology model is found to be defective within that time, we will promptly repair or replace it. This warranty does not cover problems or damage resulting from unauthorized repair, modification or disassembly.

Documents / Resources

	<a href="#">chois TECHNOLOGY XPG300Y X-Pointer Wireless Pointer Presenter</a> [pdf] Instruction Manual XP300Y-BT, XP300YBT, RVBXP300Y-BT, RVBXP300YBT, XPG300Y X-Pointer Wireless Pointer Presenter, XPG300Y, X-Pointer Wireless Pointer Presenter
---	---