

# CHROMATEQ DIN 1024 DIN Rail USB to DMX Stand Alone interface Owner's Manual

## Contents

### 1 DIN 1024

#### 1.1 DIN Rail USB to DMX Stand Alone interface

##### 1.1.1 HARDWARE Options

##### 1.1.2 SOFTWARE Options


### 2 Documents / Resources

#### 2.1 References

### 3 Related Posts



## DIN 1024

### DIN Rail USB to DMX Stand Alone interface

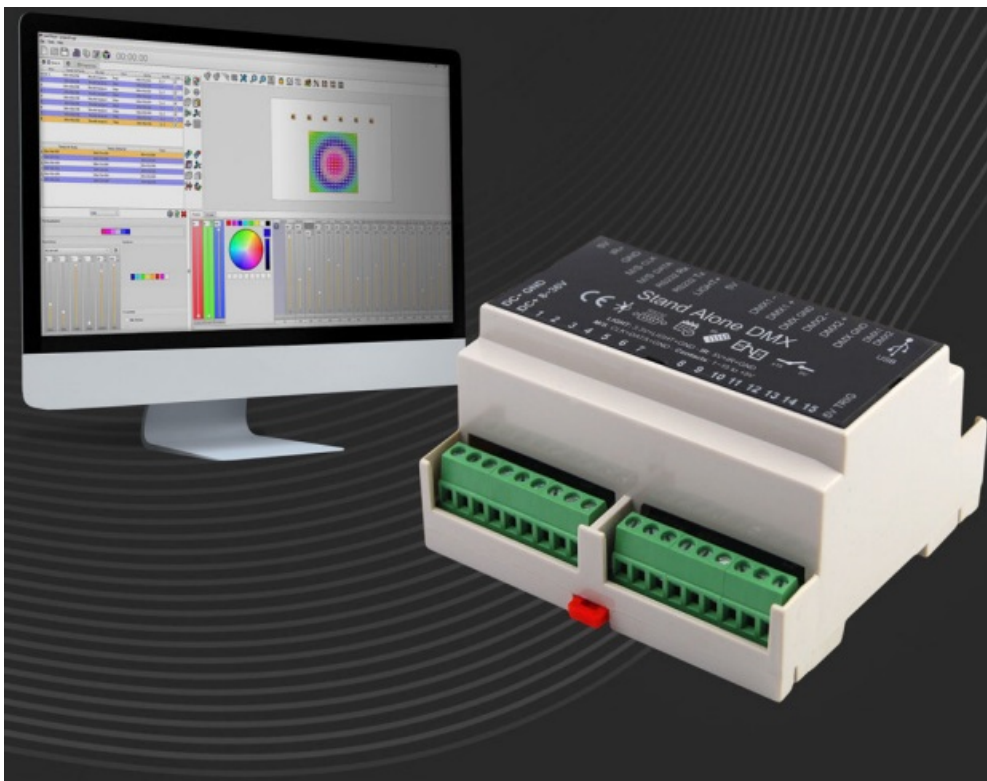

DIN 1024 is the ideal DMX stand alone interface for installation in electrical DIN cabinets with DIN rails.

Featuring a robust Stand Alone mode and a wide range of trigger possibilities, this competent device is a smart solution for easy and quick architectural installations and integration projects.

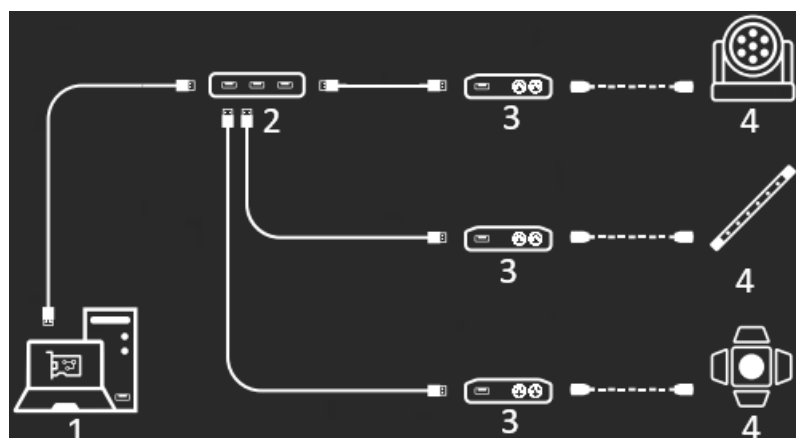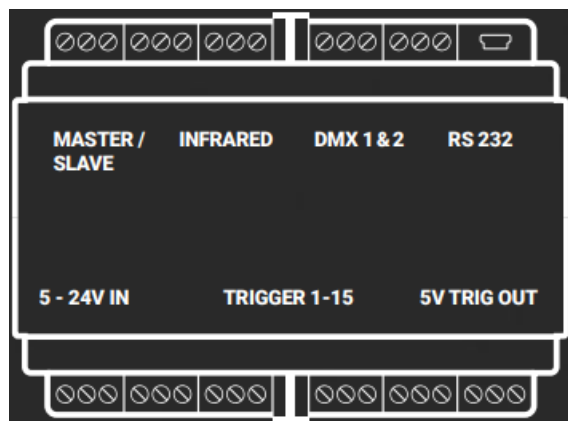


1. COMPUTER
2. USB HUB
3. USB DEVICE
4. DMX



**HARDWARE Options**

DMX Output	2×512 In/Out channels PC and Stand Alone
Zone	1 Zone, play 1 scene/sequence at time in Stand Alone
Memory	Internal memory (No SD card required)
DMX Modes	DMX In/Out, DMX Splitter, DMX Merge, DMX Record, DMX Trigger
RS232	Can receive triggers from RS232 devices (16 characters max)
Stand Alone Options	Commands from the Contacts (speed, scene, dimmer, zone) 16-bit and fine channel management Cross Fade time between scenes Automatic Scene Recovery if the power is cut off Master/Slave mode with up to 32 devices combined and synchronized (64 universes )
Triggers	Real Time Clock and calendar for each scene (Hour, Day, Week, Month, Year) 15 Dry Contacts on 3~5V (On, On/Off, Release, Restart, Scene Priority) Can receive RS232 trigger commands in Live and Stand Alone (16 characters max) Infrared Remote, Light intensity (with optional deported PCB and remote)
Max DMX outputs (USB)	x12 USB interfaces connected = 24 DMX max
Power	DC Power input of 5V to 24V
Dimension	H: 107 mm, W: 96 mm, D: 59 mm (pcb: 102/86/19)
Housing	Standard DIN-RAIL form factor (universal DIN cabinet compatibility)
I/O Connectors	Mini USB 2.0, Screw terminal block 3×9 + 6 pins
Operating Temperature	-40 to +85 C°
IP Rating	IP40
Certifications	CE, LVD, RoHS
International Warranty	5 years

#### SOFTWARE Options



LED Player	Up to 64×512 DMX Outputs
Pro DMX	30 minutes Audio and Video Timeline
Studio DMX	3D viewer in real time (Full mode)
Wi-Light 2 APP	Mobile software control (Android, iOS)
Art-Net Output from PC	1×512 DMX Outputs per connected device
System Compatibility	Windows, iOS, Linux
Technical support	Worldwide, English, French, Chinese

#### FREE SOFTWARE

Download and Update



**2010 – 2021 Chromateq SARL**

Chromateq – All rights reserved

**Software & App download:**

Software package download: <https://www.chromateq.com>

Wi Light 2 app download (iOS): <https://apps.apple.com/us/app/wi-light-2/id1523046687?l=fr>

Wi Light 2 app download (Android): <https://play.google.com/store/apps/details?id=com.chromateq.wilight2>

191 Allée de Lauzard

34980 St Gély du Fesc, FRANCE

Web: [www.chromateq.com](http://www.chromateq.com)

Email: [info@chromateq.com](mailto:info@chromateq.com)

Phone: +33 952210755

Wechat: Chromateq

WhatsApp: +8613422062209

QQ: 2908265661

PC minimum configuration:

Windows / Mac OS / Linux (Device)

2Ghz CPU, 8 Gb RAM

2Gb RAM graphic card

500 Mb disk

1 USB port (Device)


1 Ethernet Port (for Art-Net & sACN)



[www.chromateq.com](http://www.chromateq.com)

Contact Support Download

**Documents / Resources**



[CHROMATEQ DIN 1024 DIN Rail USB to DMX Stand Alone interface](#) [pdf] Owner's Manual  
DIN 1024 DIN Rail USB to DMX Stand Alone interface, DIN 1024, DIN Rail USB to DMX Stand Alone interface, USB to DMX Stand Alone interface, DMX Stand Alone interface, Stand Alone interface, Alone interface, interface

**References**

- [Lighting Control - Homepage DMX Lighting Control](#)
- [Lighting Control - Homepage DMX Lighting Control](#)
- [User Manual](#)

## **Manuals+. Privacy Policy**

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.