



CODi A01201 Centro 1201 Multi-Display 85W MST USB-C Docking Station User Manual

[Home](#) » [CODi](#) » CODi A01201 Centro 1201 Multi-Display 85W MST USB-C Docking Station User Manual 

Contents

- [1 CODi A01201 Centro 1201 Multi-Display 85W MST USB-C Docking Station](#)
- [2 System Compatibility](#)
- [3 In the Box](#)
- [4 Product Ports](#)
- [5 Displays](#)
- [6 Installation](#)
- [7 FAQs](#)
- [8 Additional Product Information](#)
- [9 Warranty Information](#)
- [10 Documents / Resources](#)



CODi A01201 Centro 1201 Multi-Display 85W MST USB-C Docking Station



Copyright

No part of this publication may be reproduced in any form by any means without prior written permission. Regardless of any direct acknowledgment elsewhere in the body of this document, CODi hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

System Compatibility

- Compatible with Windows 10/11
- Mac OS X 10 or later
- Requires that the host device supports Power Delivery (PD) 2.0
- Host device with USB 3.1 full function Type-C port


In the Box

- (1) USB-C Docking Station
- (1) 100W Power Adapter
- (1) User Manual

WEEE Directive & Product Disposal

At the end of its serviceable life, this product should not be treated as household or general waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment.

Product Ports

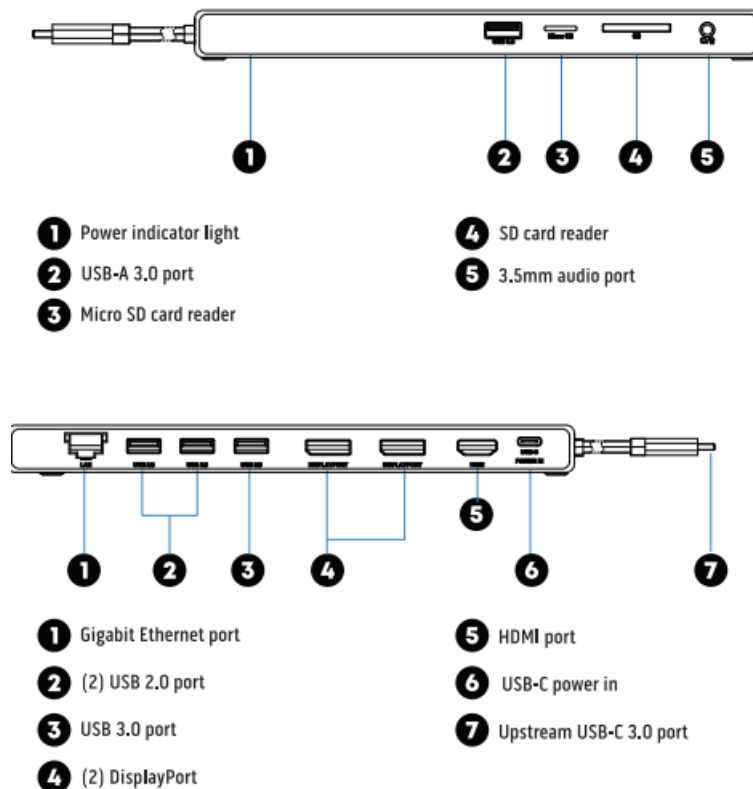

Displays

Single Display – Max Resolutions


Single Display - Max Resolutions

Video Port		DisplayPort	DisplayPort	HDMI
DisplayPort Version	DP1.2	3840 x 2160@30Hz	3840 x 2160@30Hz	3840 x 2160@30Hz
	DP1.4	3840 x 2160@30Hz	3840 x 2160@30Hz	3840 x 2160@30Hz


Dual Display - Max Resolutions

Video Port		Dual DisplayPort	DisplayPort + HDMI
DisplayPort Version	DP1.2	1920 x 1080@60Hz	1920 x 1080@60Hz
	DP1.4	3840 x 2160@30Hz	3840 x 2160@30Hz


Windows: Display Options

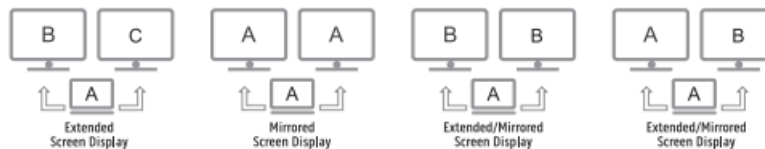

macOS: Display Options

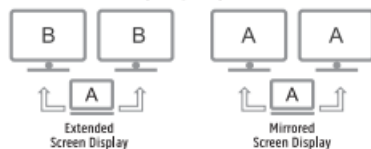

ChromeOS: Display Options

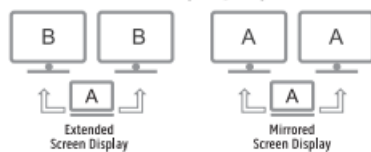

Considerations

Triple display capability

Triple displays can be achieved with select computer processors Reach out to custsupport@codiworldwide.com for more information

Windows-based host devices

Before connecting two displays, lower your monitor display resolution (see Q2 for more details)

Mac-based host devices

- When connecting to only one display, extend and mirror mode are both available
- If you have two displays connected to the dock, then you can only extend to one monitor while the other monitor will mirror the same content as the extended monitor

DisplayPort

DisplayPort interface does not support the use of HDMI to DP adapter

Installation

Prior to using this docking station, make sure that your host device is up-to-date with the latest drivers (including USB, graphics card, etc.). For more information, visit <https://www.codiworldwide.com/support-A01201>.


Connect the USB-C connector of the dock to your host device; the Power Indicator Light on the dock will turn blue
Connect your display(s) to the appropriate video ports and configure your display modes (see Display Mode Settings section for more details)

Plug the power adapter of the dock into a power outlet

Display Mode Settings

For Windows Users:

Right click anywhere on your desktop and select “Display settings”

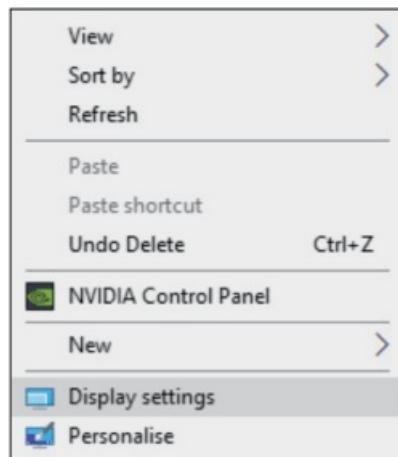


In “Display,” select either display 1 or display 2




Display Mode Settings (continued)

Scroll down to the “Multiple Displays” section and select the mode in the drop-down list that is fit for your need.

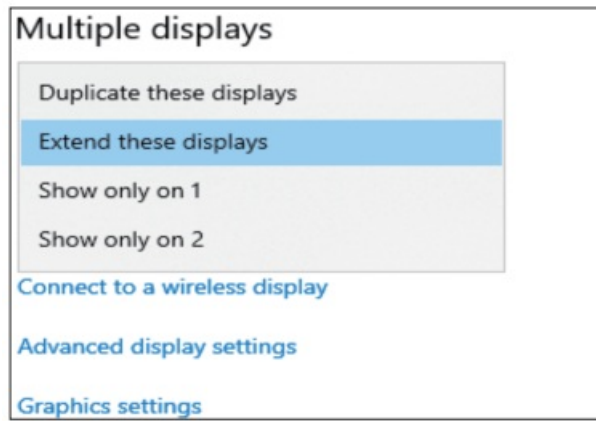


For macOS Users:

Select "System Preferences" and choose "Displays"

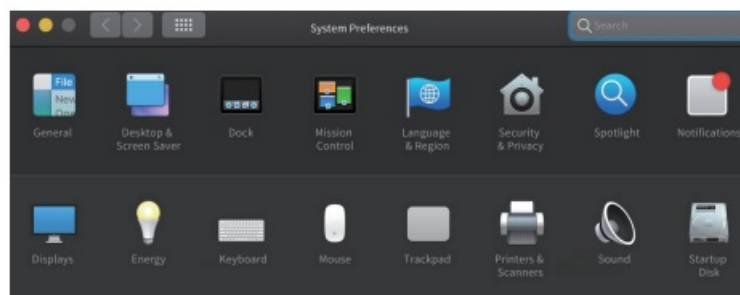


Click "Arrangement" to change the position of the displays currently connected

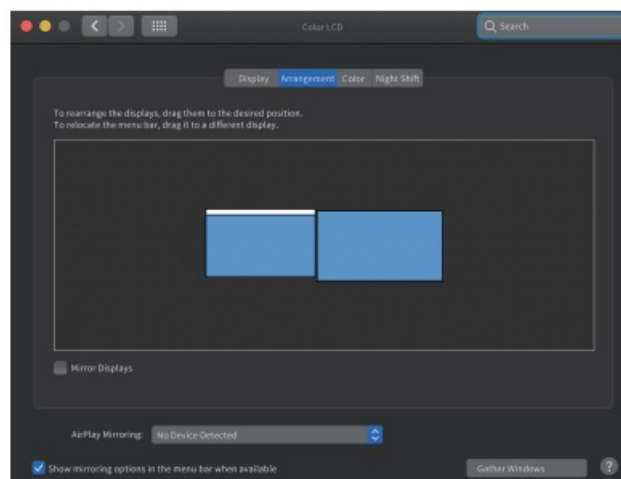

Display Mode Settings (continued)

3. Select either extend or mirror mode for your display(s)

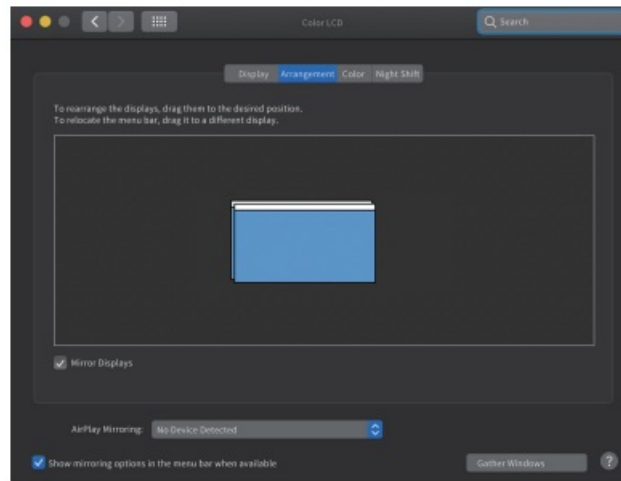

FAQs

- **Q1: Where do I find the maximum resolution my host device supports?**

A 1: Check the graphics card version of your device by finding “display adapter” In “Device Manager”. If you are unable to find it this way, you can check with your device’s manufacturer for graphics card information

- **Q2: Why does my 2K/4K display look abnormal when I setup dual display mode?**


A2: Some branded monitors cannot be adjusted automatically. The “Active signal resolution” is different from the Windows setting “Desktop resolution,” meaning that it is best practice to set these to the same value.

Right-click while on your desktop and select “Display settings”

Select your display by clicking on it and then scroll down and select

“Advanced settings”

Here, check if the resolution values of each display for “Desktop Resolution” and “Active signal resolution” are the same:

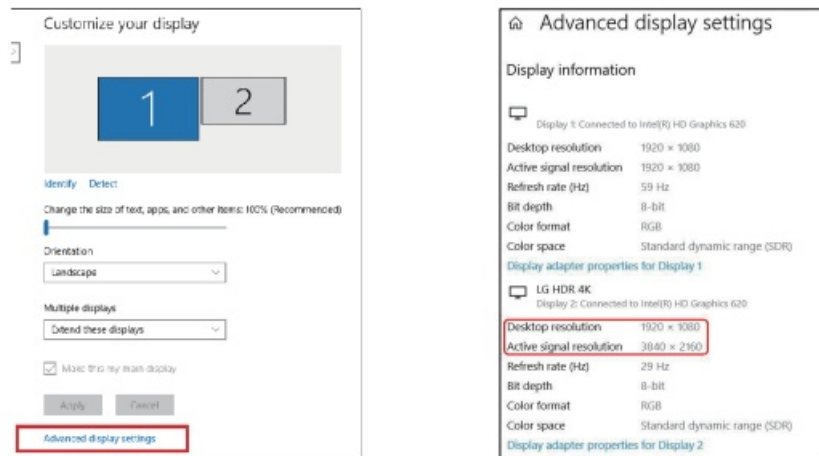

To change these values, click on “Display adapter properties for Display 2” and match the value

- **Q3: Why does my device show a “Slow Charging” warning when using the dock?**

A3: Some users may notice that the charging status shows “slow charging.” This is because some series of laptops have a protection protocol. To solve this, please use the provided external power adapter to charge with this docking station.

Additional Product Information

This dock is an MST docking station. What this means is that this dock has the ability to support multiple displays plugged in/connected via only one DisplayPort.


Warranty Information

CODi offers a non-transferable, 1 Year Limited Warranty, from date of purchase, to the original purchaser, who has properly registered the Product through www.codiwor/dwide.com. CODi warrants that all products will be free from defects in workmanship and materials under normal use, for 12 months, unless otherwise specified in a Product Specification Sheet (“Limited Warranty”).



A\ The state of California requires the following statement: WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov

Documents / Resources

	CODi A01201 Centro 1201 Multi-Display 85W MST USB-C Docking Station [pdf] User Manual A01201 Centro 1201 Multi-Display 85W MST USB-C Docking Station, A01201, Centro 1201 Multi-Display 85W MST USB-C Docking Station, Multi-Display 85W MST USB-C Docking Station, 85W MST USB-C Docking Station, USB-C Docking Station, Docking Station
---	--