

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [KLARSTEIN](#) /

› [KLARSTEIN Beersafe Minibar Instruction Manual](#)

KLARSTEIN 10032871

KLARSTEIN Beersafe Minibar Instruction Manual

Model: 10032871

Brand: KLARSTEIN

1. PRODUCT OVERVIEW

The KLARSTEIN Beersafe Minibar is a compact and efficient beverage refrigerator designed for convenient storage of bottles and cans. Featuring a 60-liter capacity, it includes three removable chrome metal inserts and switchable LED interior lighting for optimal visibility and organization. Its quiet operation at 42 dB and low power consumption make it an ideal addition to various settings.



Image 1.1: Front view of the KLARSTEIN Beersafe Minibar, showcasing its sleek design, glass door, and interior lighting with beverages stored inside.

This minibar boasts a durable housing with a stainless steel door frame and handle, complemented by a double-insulated panoramic glass door. The 5-step adjustable thermostat allows for precise temperature control, ensuring your beverages are cooled to your preference. Its compact form factor allows for easy placement in various rooms, and its energy-saving design consumes only 60 kWh per year.



Image 1.2: The Beersafe Minibar integrated into a kitchen environment, highlighting its elegant cooling capabilities and aesthetic appeal.



Image 1.3: The Beersafe Minibar in a social setting, demonstrating its quiet operation and convenience for entertaining.

2. SAFETY INSTRUCTIONS

Please read all safety instructions carefully before operating the appliance to prevent injury or damage. Keep this manual for future reference.

- **Electrical Safety:** Ensure the power outlet matches the voltage specified on the appliance's rating label. Do not use extension cords or adapters. Always unplug the appliance before cleaning or maintenance.
- **Ventilation:** Allow adequate space around the appliance for proper ventilation (at least 4 inches on sides and back) to ensure efficient cooling and prevent overheating. Do not block ventilation openings.
- **Placement:** Place the appliance on a firm, level surface away from direct sunlight, heat sources (e.g., stoves, heaters), and moisture. Avoid placing it in areas with extreme temperatures.
- **Handling:** Do not tilt the appliance more than 45 degrees during transport or installation. Allow it to stand upright for at least 2-4 hours before plugging it in to allow refrigerants to settle.

- **Cleaning:** Use only mild detergents and a soft cloth for cleaning. Avoid abrasive cleaners, solvents, or flammable liquids.
- **Children:** This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.

3. PACKAGE CONTENTS

Upon unpacking, please verify that all components are present and undamaged:

- KLARSTEIN Beersafe Minibar Unit
- 3 x Chrome Metal Inserts (Shelves)
- Door Handle (may require assembly)
- Power Cord (integrated or separate)
- Instruction Manual

If any parts are missing or damaged, please contact KLARSTEIN customer support immediately.

4. SETUP

1. **Unpacking:** Carefully remove the appliance from its packaging. Retain packaging materials for future transport if needed.
2. **Placement:**
 - Choose a location with a firm, level surface capable of supporting the weight of the minibar when full.
 - Ensure there is adequate air circulation around the unit. Maintain at least 4 inches (10 cm) of space from walls or other objects on the sides and back.
 - Avoid direct sunlight or proximity to heat-emitting appliances (e.g., ovens, radiators).
 - The minibar is designed for indoor use.



Image 4.1: Examples of suitable placement locations for the Beersafe Minibar in different home and office environments.

3. **Door Handle Installation (if separate):** If the door handle is not pre-installed, attach it using the provided screws. The screw holes may be located behind the door gasket.
4. **Initial Cleaning:** Before first use, wipe the interior and exterior of the minibar with a damp cloth and mild detergent. Dry thoroughly.
5. **Power Connection:** After placement and cleaning, allow the minibar to stand upright for at least 2-4 hours before plugging it into a grounded electrical outlet. This allows the refrigerant to settle.
6. **Initial Operation:** Plug in the minibar. The interior light should illuminate, and the compressor will begin to operate. Allow the unit to run empty for a few hours to reach its stable operating temperature before loading with beverages.

5. OPERATING INSTRUCTIONS

5.1 Temperature Control

The Beersafe Minibar features a 5-step adjustable thermostat, typically located inside the unit (e.g., bottom right). Turn the dial to select your desired cooling level. Higher numbers generally indicate colder temperatures.

- Setting 1: Least cold
- Setting 5: Most cold

Adjust the setting based on ambient temperature and desired beverage coolness. It may take several hours for the internal temperature to stabilize after adjustment.



5-STUFIGER TEMPERATUR- REGLER

Für Kühlung nach
Wunsch



42 DB BETRIEBS- GERÄUSCH

Angenehm leise
in jedem Raum

Image 5.1: Illustration of the 5-stage temperature controller, allowing users to set the desired cooling level.

5.2 LED Interior Lighting

The minibar is equipped with switchable LED interior lighting. This light enhances visibility of the contents and adds to the aesthetic appeal. The switch for the light is typically located near the light fixture or on the control panel.

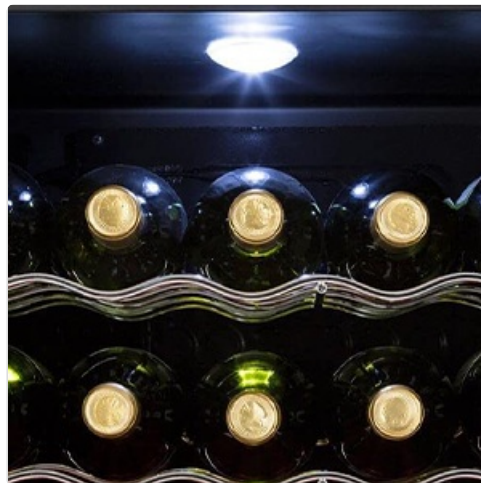


Image 5.2: Detail of the interior LED lighting, showcasing how it illuminates the stored beverages.

5.3 Shelf Adjustment

The three chrome metal inserts are removable, allowing you to adjust the internal configuration to accommodate different sizes of bottles and cans. Carefully slide shelves out and reposition them as needed.



Image 5.3: The removable chrome shelves, providing flexible storage options within the minibar.

6. MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your Beersafe Minibar.

6.1 Cleaning

- **Interior:** Unplug the minibar before cleaning. Remove all contents and shelves. Wipe the interior surfaces with a soft cloth dampened with a mild detergent solution. Rinse with clean water and dry thoroughly.
- **Exterior:** Clean the exterior surfaces, including the glass door and stainless steel elements, with a soft cloth and a non-abrasive cleaner. For stainless steel, wipe in the direction of the grain.
- **Door Gasket:** Regularly clean the door gasket to ensure a tight seal. A dirty or sticky gasket can prevent the door from closing properly, leading to inefficient cooling.
- Do not use harsh chemicals, abrasive pads, or flammable cleaning agents.

6.2 Defrosting

The Beersafe Minibar features an automatic defrost system, which means manual defrosting is generally not required. Any frost that forms on the evaporator will melt automatically and evaporate. If excessive frost buildup occurs, unplug the

unit and allow it to defrost completely before cleaning and restarting.

7. TROUBLESHOOTING

Before contacting customer support, please refer to the following common issues and their solutions:

Problem	Possible Cause	Solution
Minibar does not operate.	No power supply; power cord not plugged in; circuit breaker tripped.	Check power connection; ensure outlet is functional; reset circuit breaker.
Minibar is not cooling sufficiently.	Temperature setting too high; door not closed properly; poor ventilation; ambient temperature too high.	Adjust thermostat to a colder setting; ensure door is sealed; provide adequate clearance around unit; move to a cooler location.
Excessive noise.	Unit not level; objects touching the back or sides; normal compressor operation.	Adjust leveling feet; ensure nothing is touching the unit; some noise from compressor and refrigerant flow is normal (42 dB).
Interior light not working.	Light switch off; LED bulb failure.	Check light switch; contact customer support for bulb replacement if needed.

8. SPECIFICATIONS

Feature	Detail
Brand	KLARSTEIN
Model Number	10032871 (HEA-BeersafeXL-Onyx)
Capacity	60 Liters
Product Dimensions (D x W x H)	18.5 x 20.47 x 24.8 inches (47 x 52 x 63 cm)
Item Weight	58.2 pounds (26.4 kg)
Noise Level	42 dB
Annual Energy Consumption	60 Kilowatt Hours Per Year
Installation Type	Freestanding
Color	Black
Voltage	220 Volts
Wattage	85 watts
Defrost System	Automatic
Number of Shelves	3 (Chrome Metal)
Number of Doors	1

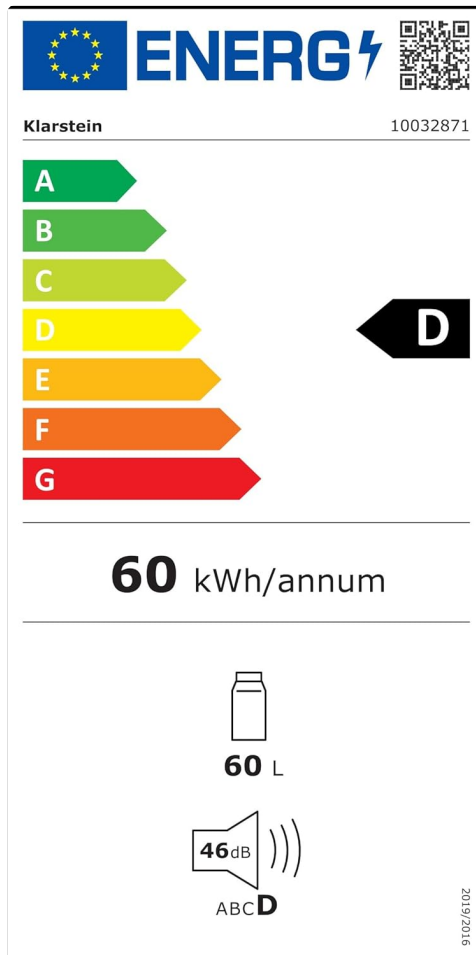


Image 8.1: Energy efficiency label for the Beersafe Minibar. Note: The label shows 46dB, while product specifications state 42dB. Refer to product specifications for precise details.

For detailed product information and energy label verification, visit: <https://eprel.ec.europa.eu/qr/1217352>

9. WARRANTY AND CUSTOMER SUPPORT

KLARSTEIN products are manufactured with care and undergo strict quality control. In the unlikely event of a defect or if you require assistance, please contact KLARSTEIN customer support.

For support, please refer to the contact information provided with your purchase or visit the official KLARSTEIN website. When contacting support, please have your model number (10032871) and purchase details readily available.

Note: Warranty terms and conditions may vary by region and retailer. Please consult your purchase documentation for specific warranty details.