

[Manuals.plus](#) /

> [Feiteplus](#) /

> Universal Car Seat ISOFIX Latch Interface Bracket Mounting for Baby Safety Chair (Guide Groove Free Send) - Instruction Manual

Feiteplus FP-1247

Feiteplus Universal Car Seat ISOFIX Latch Interface Bracket

INSTRUCTION MANUAL

Product Overview

The Feiteplus Universal Car Seat ISOFIX Latch Interface Bracket is designed to provide secure ISOFIX/LATCH anchor points in vehicles that do not have them pre-installed. This bracket allows for the safe and stable attachment of baby safety chairs, enhancing child passenger safety. It is constructed from durable 4mm thickened steel with a black electrophoresis surface treatment for corrosion resistance.



Image: The Feiteplus Universal Car Seat ISOFIX Latch Interface Bracket, including the main bracket and two guide grooves.

FEITEPLUS

A good idea to add the ISOFIX Latch Interface Bracket on your car seat if your seat do not have this item.



WIDE RANGE OF USES



NONDESTRUCTIVE
INSTALLATION



HIGH STRENGTH STEEL
PLATE



LASER CUTTING



OVERHAND DESIGN



SECURITY FIRM



Image: Key features of the Feiteplus bracket, highlighting wide range of uses, nondestructive installation, high strength steel plate, laser cutting, overhand design, and security firm.

Setup and Installation

Proper installation of the ISOFIX Latch Interface Bracket is crucial for safety. This bracket is designed for universal application in cars, SUVs, and buses. It comes with a pair of ISOFIX guide grooves to assist with installation.


Installation Steps:

1. **Prepare the Vehicle:** Access the area behind your vehicle's rear seat where the bracket will be mounted. This may involve folding down or removing parts of the rear seat backrest.
2. **Position the Bracket:** Place the ISOFIX Latch Interface Bracket in the desired position, ensuring it aligns with a sturdy part of the vehicle's frame or seat structure. The bracket features adjustable screws to help secure it firmly.
3. **Secure the Bracket:** Use appropriate fasteners (not explicitly detailed in product information, but implied by installation) to firmly attach the bracket to the vehicle. Ensure all connections are tight and secure to prevent movement.

4. **Install Guide Grooves:** Once the main bracket is secure, attach the provided ISOFIX guide grooves. These plastic pieces help guide the car seat's ISOFIX connectors onto the bracket's anchors.
5. **Verify Stability:** After installation, firmly push and pull on the bracket to ensure it is rigidly attached and does not shift or move.

DETAILS

Laser cutting and forming, black electrophoresis on surface.

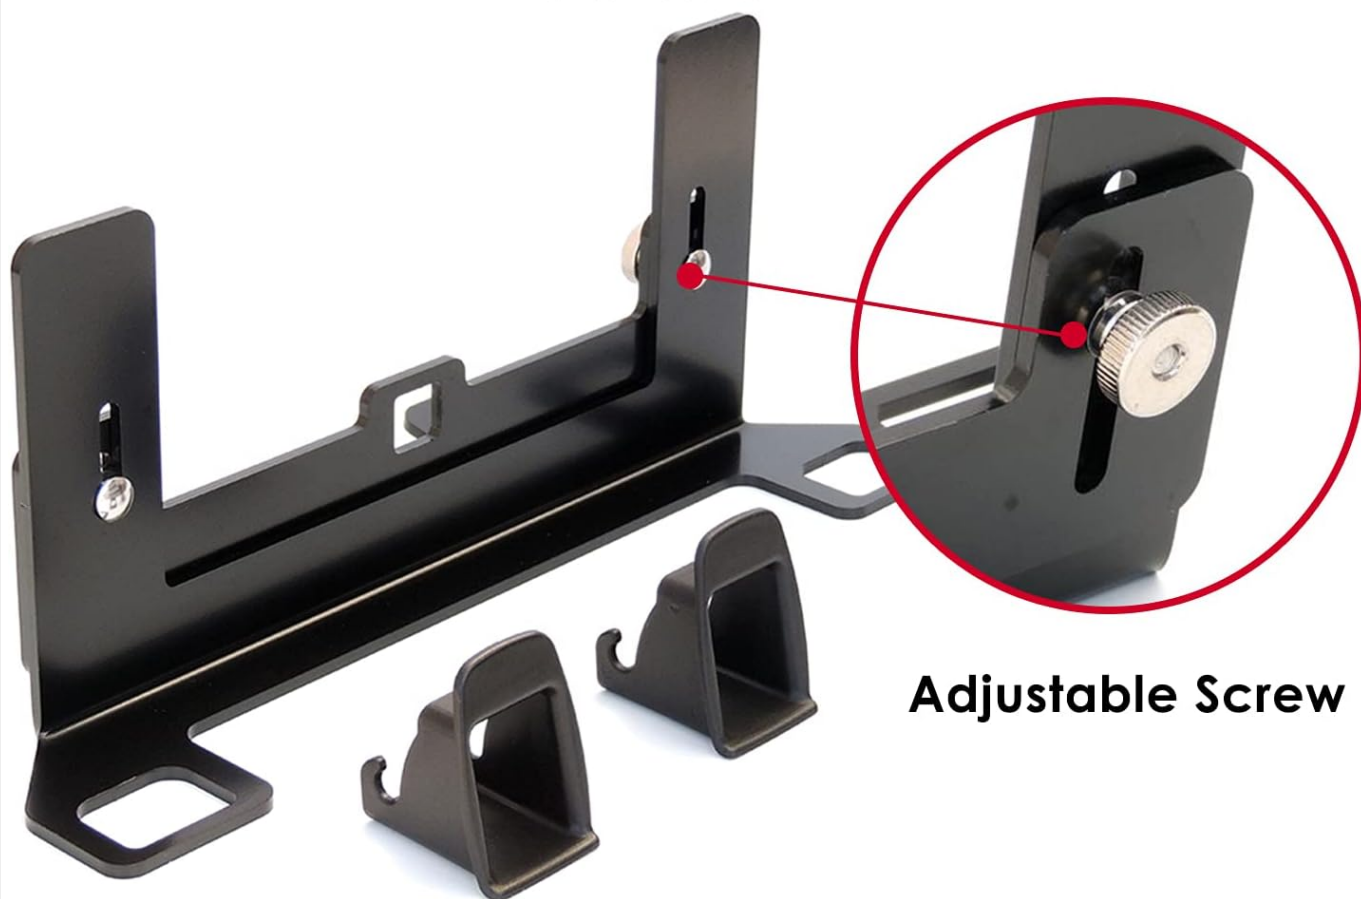

Adjustable Screw

4mm Thicken Steel Panel

Image: Close-up view of the adjustable screw mechanism on the ISOFIX bracket, demonstrating how it can be tightened for a secure fit. The bracket is made of 4mm thickened steel.



FUNCTION

The height of anti-stripping steel plate can be adjusted, and the model is more compatible

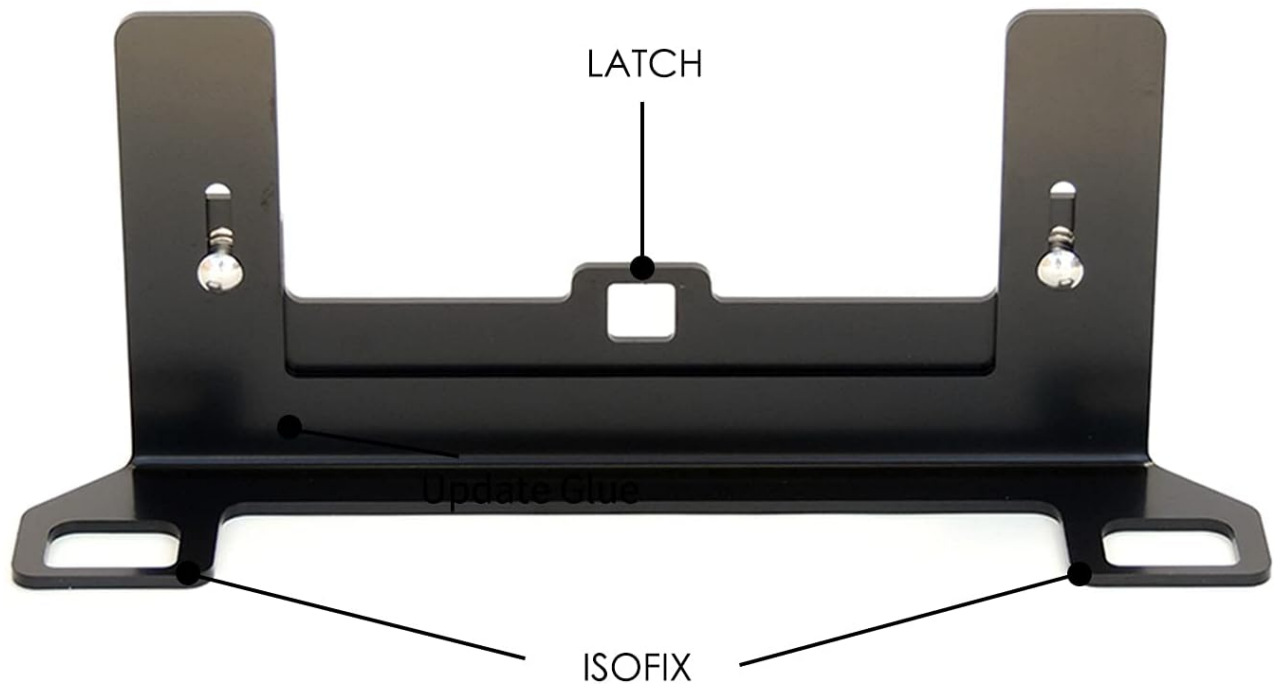


Image: Front view of the ISOFIX Latch Interface Bracket, clearly labeling the central LATCH point and the two outer ISOFIX anchor points.

Installation Video:

Video: An official installation guide demonstrating the process of installing the Feiteplus ISOFIX Latch Interface Bracket in a vehicle. This video provides visual instructions for securing the bracket and preparing it for a child safety seat.

Operating (Attaching a Car Seat)

Once the Feiteplus ISOFIX Latch Interface Bracket is securely installed in your vehicle, you can attach any compatible child safety seat that uses the ISOFIX or LATCH system. The bracket provides the necessary anchor points for a firm connection.

Steps for Attaching a Car Seat:

1. **Locate ISOFIX/LATCH Connectors:** Identify the ISOFIX or LATCH connectors on your child safety seat.
2. **Align and Connect:** Using the guide grooves (if installed), align the car seat's connectors with the ISOFIX anchor points on the Feiteplus bracket. Push firmly until you hear an audible click, indicating a secure connection.
3. **Check for Tightness:** After connecting, push and pull on the child safety seat to ensure it is tightly secured to the bracket and does not move more than one inch side-to-side or front-to-back at the belt path.

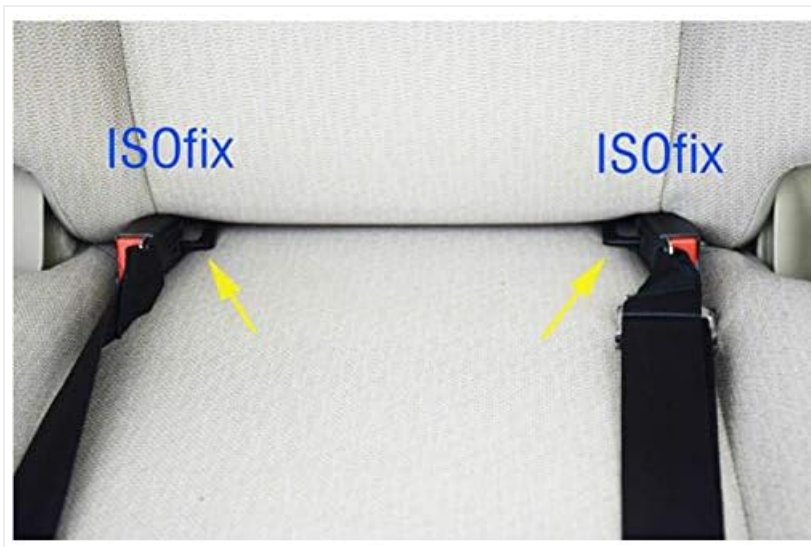


Image: An example of how ISOFIX points appear in a car seat, demonstrating the typical location where the bracket's anchors would be utilized.

The bracket is universal and suitable for all car, SUV, and bus types, making it competent for any brand and style of child safety seat on the market.

APPLY SCENE

It is competent for any brand and style of child safety seat on the market



Image: Visual representation of the bracket's applicability across different vehicle types: cars, SUVs, and buses.

Maintenance

The Feiteplus ISOFIX Latch Interface Bracket is designed for durability and requires minimal maintenance. Regular checks are recommended to ensure continued safety and functionality.

- **Periodic Inspection:** Periodically inspect the bracket for any signs of wear, damage, or corrosion. Check that all screws and fasteners remain tight.
- **Cleaning:** If necessary, wipe the bracket clean with a damp cloth. Avoid using harsh chemicals or abrasive cleaners that could damage the black electrophoresis surface.
- **Secure Fit:** Always ensure the bracket remains securely mounted to the vehicle. Re-tighten any loose fasteners immediately.

Troubleshooting

If you encounter issues with the Feiteplus ISOFIX Latch Interface Bracket, consider the following:

- **Bracket Not Stable/Shifting:** This is typically due to improper or insufficient fastening. Ensure the bracket is securely bolted or attached to a rigid part of the vehicle's frame or seat structure. Re-check all connection points and tighten them firmly. Some vehicles may require specific mounting solutions or minor modifications to achieve a completely rigid installation.
- **Difficulty Attaching Car Seat:** Ensure the ISOFIX guide grooves are correctly positioned. Verify that the car seat's ISOFIX/LATCH connectors are fully extended and properly aligned with the bracket's anchor points.
- **Bracket Does Not Fit Vehicle:** While designed for universal application, vehicle interiors vary. Confirm that there is adequate space and a suitable mounting surface behind your vehicle's rear seat for the bracket. Refer to your vehicle's manual for information on child seat anchor points or compatible accessories.

Specifications

Brand	Feiteplus
Model Number	FP-1247
Mounting Type	Car Interior Mount
Material	4mm Thicken Steel Pad
Color	Black
Item Weight	3.39 pounds (1.54 Kilograms)
Package Dimensions	13.8 x 6.5 x 2.7 inches
Size	Universal
Item Package Quantity	1
Country of Origin	China

SIZE

Product size

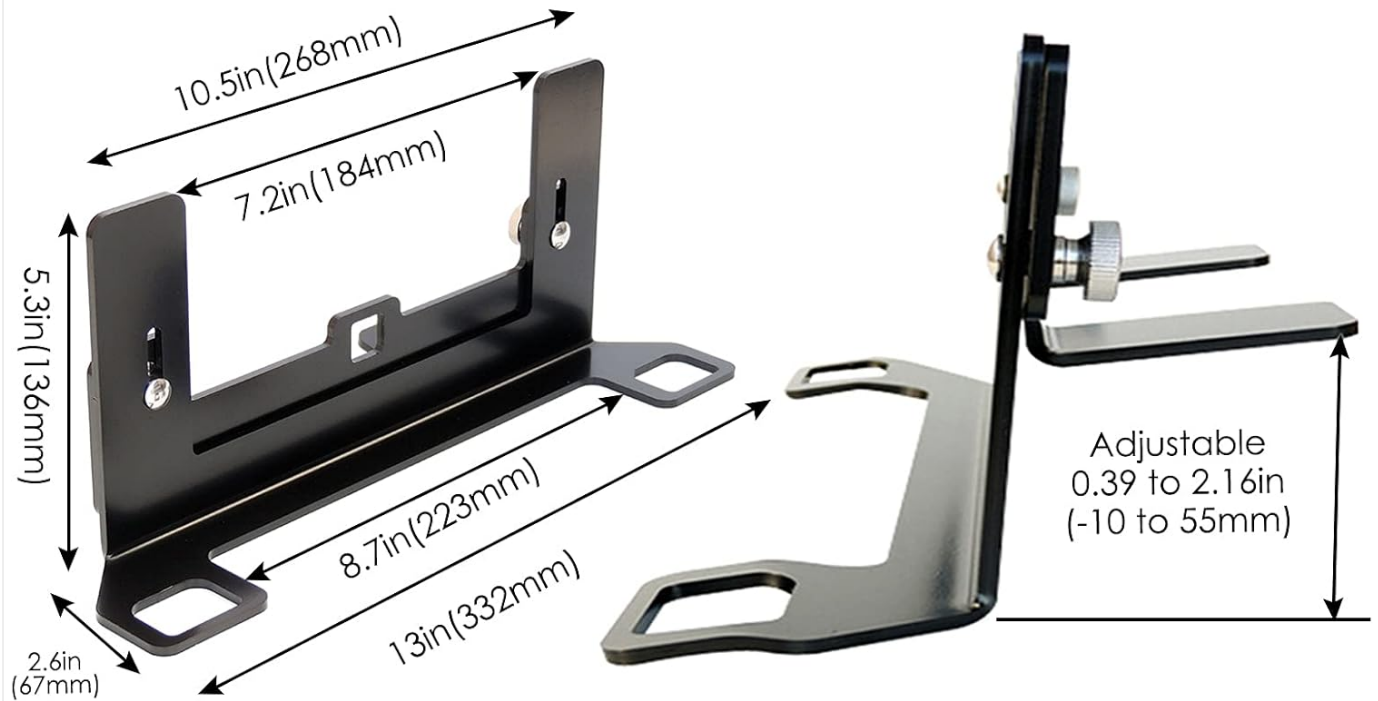


Image: Detailed dimensions of the ISOFIX Latch Interface Bracket, showing measurements in both inches and millimeters for various parts of the assembly.

Warranty

This product comes with a warranty of **90 days after the purchase date**. Please retain your proof of purchase for warranty claims.

Support

For any questions, concerns, or technical assistance regarding your Feiteplus Universal Car Seat ISOFIX Latch Interface Bracket, please contact the manufacturer or your point of purchase. Ensure you have your product model number (FP-1247) and purchase details ready when seeking support.

© 2025 Feiteplus. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B07JW9MZRQ>

More documents and user manuals: **<https://manuals.plus/>**