

Homary B07JZF69FS

Homary Freestanding Tub Filler Faucet Instruction Manual

Model: B07JZF69FS

INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your Homary Freestanding Tub Filler Waterfall Spout Floor Mount Bathtub Faucet with Handheld Sprayer. Please read this manual thoroughly before installation and retain it for future reference. Proper installation and care will ensure optimal performance and longevity of your faucet.

SAFETY INFORMATION

- Always turn off the main water supply before beginning any installation or maintenance.
- Wear appropriate personal protective equipment, such as safety glasses and gloves.
- If you are unsure about any part of the installation process, consult a qualified plumber.
- Ensure all connections are secure and watertight to prevent leaks.
- Do not overtighten connections, as this can damage components.
- Keep small parts away from children.

PACKAGE CONTENTS

Verify that all components are present and undamaged before beginning installation. If any parts are missing or damaged, contact Homary customer support.

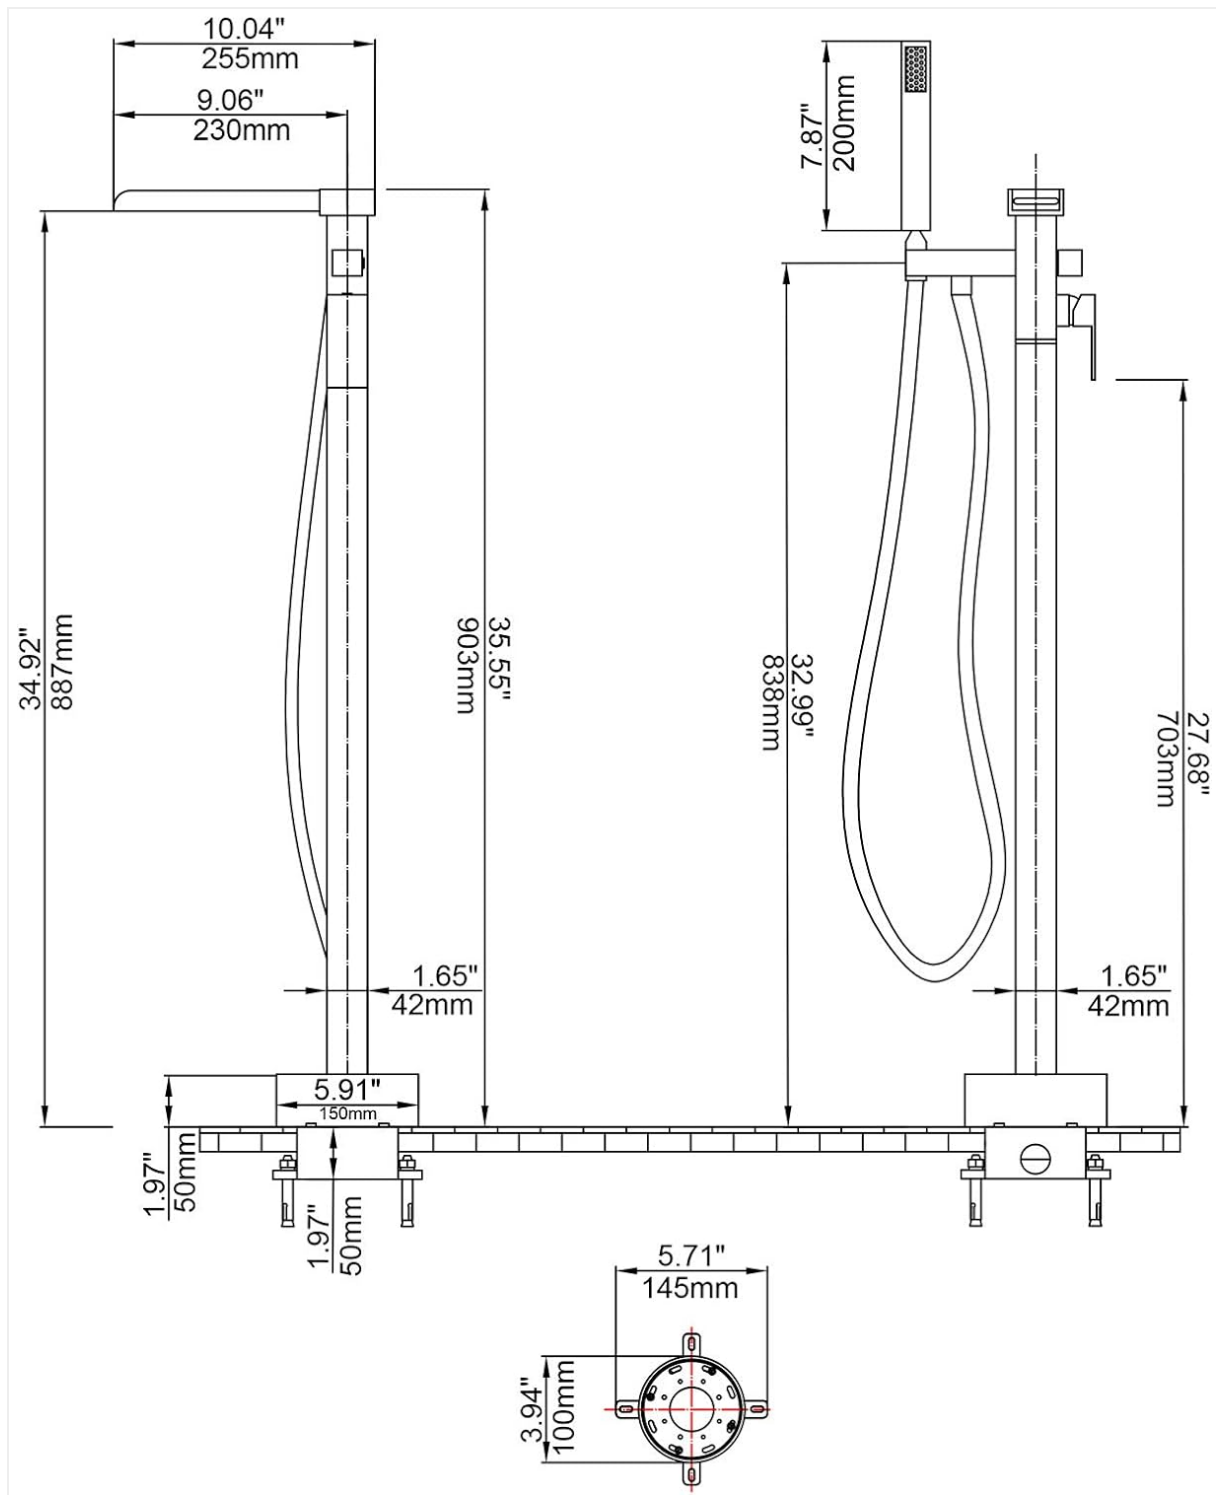


Image: All components of the Homary Freestanding Tub Filler Faucet, including the main faucet body, handheld shower, hose, rough-in box, and connection pipes.

- Freestanding Faucet Body with Waterfall Spout
- Handheld Shower with Hose
- Diverter Knob
- Single Handle for Temperature and Flow Control
- Rough-in Box for Floor Mounting
- Mounting Hardware and Seals
- Hot and Cold Water Supply Lines

SPECIFICATIONS

Brand	Homary
Model Number	B07JZF69FS
Finish Type	Polished, Brushed
Number of Handles	1
Handle Material	Brass, Ceramic
Mounting Type	Floor Mount
Product Dimensions	10.04 x 5.91 x 35.55 inches
Item Weight	18.86 pounds
Material	Brass, Ceramic



Image: Technical drawing showing precise dimensions in inches and millimeters for the faucet and its components, crucial for installation planning.

INSTALLATION (SETUP)

Professional installation is recommended for this product. Ensure you have all necessary tools and materials before starting.

- 1. Prepare the Installation Area:** Turn off the main water supply. Clear the area where the faucet will be installed. Ensure the floor structure can support the faucet and tub.
- 2. Install the Rough-in Box:** Position the rough-in box according to the provided dimension diagram (refer to the Specifications section image). Secure it to the subfloor using appropriate fasteners. Ensure it is level and properly aligned with the intended faucet location.
- 3. Connect Water Supply Lines:** Connect the hot and cold water supply lines to the rough-in box. Use thread sealant tape on all threaded connections to ensure a watertight seal. Ensure the lines are properly marked for hot and cold.
- 4. Mount the Faucet Body:** Once the rough-in box is secured and water lines are connected, attach the main faucet body to the rough-in box. Follow the manufacturer's instructions for securing the

faucet to the floor mount.

5. **Connect Handheld Sprayer and Hose:** Attach the handheld sprayer hose to the designated connection point on the faucet body. Ensure the connection is tight.
6. **Test for Leaks:** Slowly turn on the main water supply. Check all connections for leaks. If any leaks are detected, turn off the water supply, tighten the connections, and re-test. Repeat until all connections are watertight.
7. **Final Assembly:** Install the escutcheon plate to cover the rough-in box and provide a finished look.



Image: Labeled diagram highlighting key components of the faucet, such as the waterfall spout, handheld shower, and diverter knob, which are important for understanding installation and operation.

OPERATION

The Homary Freestanding Tub Filler Faucet is designed for ease of use with a single handle and a diverter knob.

1. Controlling Water Flow and Temperature:

The single handle controls both water flow and temperature. Lift the handle to increase water flow. Move the handle left for hot water and right for cold water. Adjust the handle position to achieve the desired temperature and flow rate.

2. Switching Between Spout and Handheld Sprayer:

To switch water output from the waterfall spout to the handheld sprayer, pull the diverter knob located on the faucet body. Push the knob back down to return water flow to the waterfall spout.

3. Using the Handheld Sprayer:

Once the diverter knob is engaged, the handheld sprayer will provide water. Direct the sprayer as needed for targeted cleaning or rinsing.



Image: The faucet's waterfall spout in operation, demonstrating the smooth laminar stream of water.

MAINTENANCE

Regular maintenance will help preserve the finish and functionality of your faucet.

- **Cleaning the Finish:** Clean the polished chrome finish regularly with a soft cloth and mild soap or a non-abrasive cleaner specifically designed for chrome. Avoid using abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the finish.
- **Checking for Leaks:** Periodically inspect all connections for any signs of leaks. Address any leaks promptly to prevent water damage.
- **Cleaning the Sprayer Nozzles:** If water flow from the handheld sprayer becomes irregular, the nozzles may be clogged. Gently rub the rubber nozzles to dislodge mineral deposits. For stubborn

clogs, a mixture of vinegar and water can be used.

- **Cartridge Maintenance:** If the faucet experiences persistent dripping or difficulty controlling temperature/flow, the ceramic cartridge may need to be inspected or replaced. This typically requires professional assistance.

TROUBLESHOOTING

Refer to the following table for common issues and their solutions. If the problem persists, contact Homary customer support or a qualified plumber.

Problem	Possible Cause	Solution
Faucet Leaks	Loose connections, damaged O-rings, faulty cartridge.	Turn off water supply. Check and tighten all connections. Inspect O-rings for damage and replace if necessary. If the leak persists from within the faucet body, the cartridge may need replacement by a professional.
Low Water Flow	Clogged aerator/spout, mineral buildup, partially closed shut-off valves.	Remove and clean the aerator/spout screen. Check if the main water supply valves are fully open. Clean any mineral buildup in the handheld sprayer nozzles.
Inconsistent Water Temperature	Faulty cartridge, issues with water heater, unbalanced water pressure.	Ensure your water heater is functioning correctly. If the issue is specific to the faucet, the ceramic cartridge may require inspection or replacement. Consult a plumber if unsure.
Diverter Not Switching	Diverter mechanism clogged or damaged.	Ensure the diverter knob is fully pulled or pushed. If it feels stiff or doesn't engage, it may require cleaning or replacement of internal components.

WARRANTY INFORMATION

Homary products are manufactured to high-quality standards. For specific warranty terms and conditions applicable to your Freestanding Tub Filler Faucet, please refer to the warranty documentation included with your purchase or visit the official Homary website. Keep your proof of purchase for warranty claims.

CUSTOMER SUPPORT

If you have any questions, require technical assistance, or need to report a missing/damaged part, please contact Homary customer support.

How to contact us?

Contact us with questions.



※ Excluding public holidays.

※ Please provide your order number when contacting us via WhatsApp & Email.



Scan QR code to WhatsApp us

Image: Homary Customer Care Center contact details, including phone number and email address, for support inquiries.

Phone: +1 909 808 9057

Email: service@homary.com

Service Time: Reply within 24 hours (excluding public holidays)

Please provide your order number when contacting via WhatsApp & Email.