



# CYBER SCIENCES CyTime SER-32e Sequence of Events Recorder with 4.3 Inch Color Touchscreen Display User Guide

[Home](#) » [CYBER SCIENCES](#) » CYBER SCIENCES CyTime SER-32e Sequence of Events Recorder with 4.3 Inch Color Touchscreen Display User Guide 

## Contents

- 1 CYBER SCIENCES CyTime SER-32e Sequence of Events Recorder with 4.3 Inch Color Touchscreen Display
- 2 Key features include
- 3 Package Contents
- 4 Wiring
- 5 Inputs
- 6 Control Power
- 7 Documents / Resources
  - 7.1 References
- 8 Related Posts



CYBER SCIENCES CyTime SER-32e Sequence of Events Recorder with 4.3 Inch Color Touchscreen Display



## Initial Configuration – Device Display

The time SER-32e features a 4.3” color touchscreen display that supports the initial configuration of Ethernet communication parameters. To configure Ethernet or confirm settings, select the Setup icon To configure Ethernet communications, select the “EDIT” button and step through the configuration wizard.



## Configuration – Web Interface

Configuring the CyTime SER-32e can be accomplished using the device’s secure web server. To connect a PC to the SER-32e:

- Connect your PC to the SER using a standard Ethernet patch cable.
- Set PC to use static IP address 169.254.0.10 (LAN 1 or LAN 2)
- Apply power to the SER.
- Open a standard web browser, such as Microsoft Edge™ or Google chrome.
- Type the SER’s default IP address (169.254.0.10) into your web browser.
- Enter the default user name (admin) and password (csi\_serial number) and click “Login”.
- Click the Setup tab to configure Communications, Time, Inputs, Groups, and device Administration.

The time SER-32e sequence of events recorder provides precise time-stamped event reporting for 32 input channels to enable root-cause analysis and advanced system diagnostics

## Key features include

- Configurable event recording
- Event log
- EPSS data log groups
- Operations counters
- Time synchronization (PTP, NTP, IRIG-B, DCF77)
- Time synch master (PTP, IRIG-B, DCF77, 1 per 10)
- Trigger output
- Ethernet communications
- ModbusTCP and RESTful support
- Secure web server


## Package Contents

- The SER-32e sequence of events recorder
- Plug-in connectors
- Quick Start Guide


## DANGER

### HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- Only qualified workers should install this equipment. Such work should be performed only after reading this entire set of instructions.
- NEVER work alone.
- Before performing visual inspections, tests, or maintenance on this equipment, disconnect all sources of electric power. Assume that all circuits are live until they have been completely de-energized, tested, and tagged. Pay particular attention to the design of the power system. Consider all sources of power, including the possibility of back feeding.
- Apply appropriate personal protective equipment (PPE) and follow safe electrical practices. For example, in the USA, see NFPA 70E.
- Turn off all power supplying the equipment in which the device is to be installed before installing and wiring the device.
- Always use a properly rated voltage sensing device to confirm that power is off.
- Beware of potential hazards, wear personal protective equipment, and carefully inspect the work area for tools and objects that may have been left inside the equipment.
- The successful operation of this equipment depends upon proper handling, installation, and operation. Neglecting fundamental installation requirements may lead to a personal injury as well as damage to electrical equipment or other property.
- The time SER-32e is mounted to a standard DIN rail by engaging the bottom edge of the rail first, pressing up and rotating the unit into place.

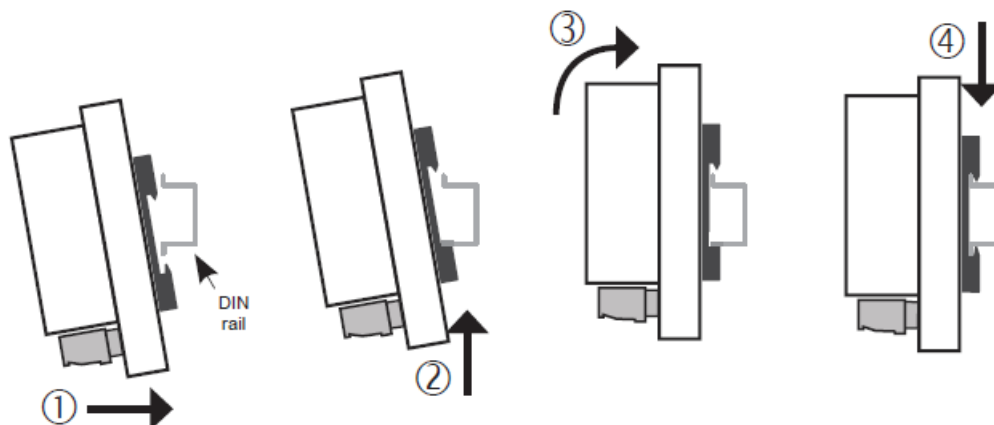


## Wiring

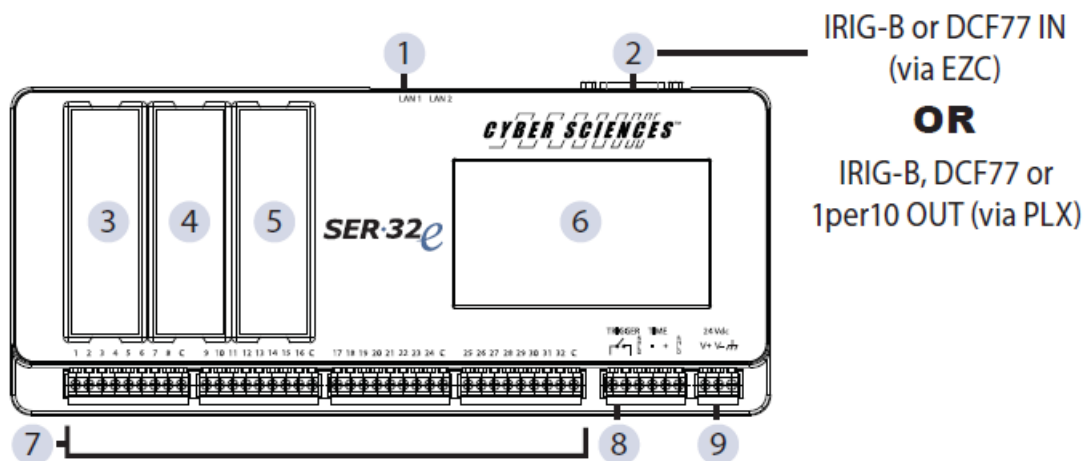

1. Ethernet
2. Time Sync IN or OUT
3. Expansion Module
4. Expansion Module
5. Power Control Module
6. Touchscreen
7. Inputs (32)
8. Trigger OUT /RS-485
9. Control Power


## Inputs

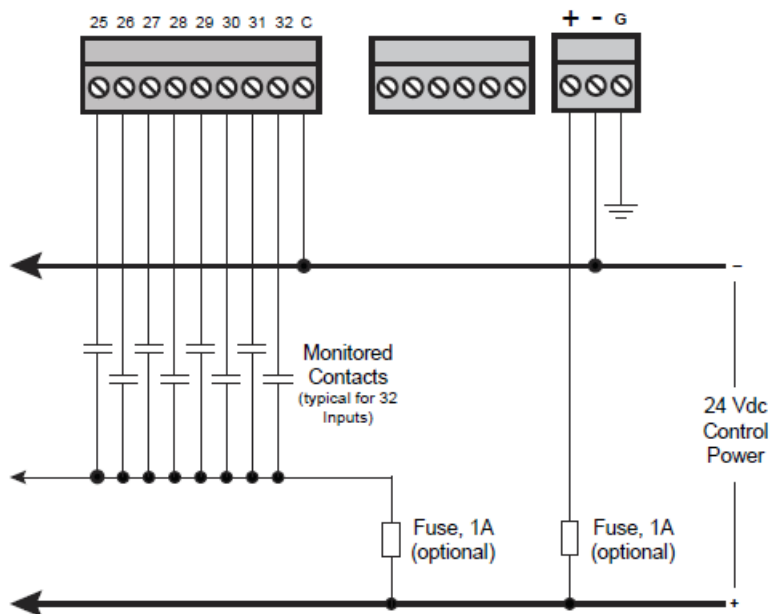

The SER has 32 isolated digital inputs arranged in 4 groups of 8 inputs, each sharing a common return. A 24 VDC whetting source is required.

**Note:** 18 AWG (Belden 8760) shielded twisted pair cable is recommended for all input and output connections.

## Control Power

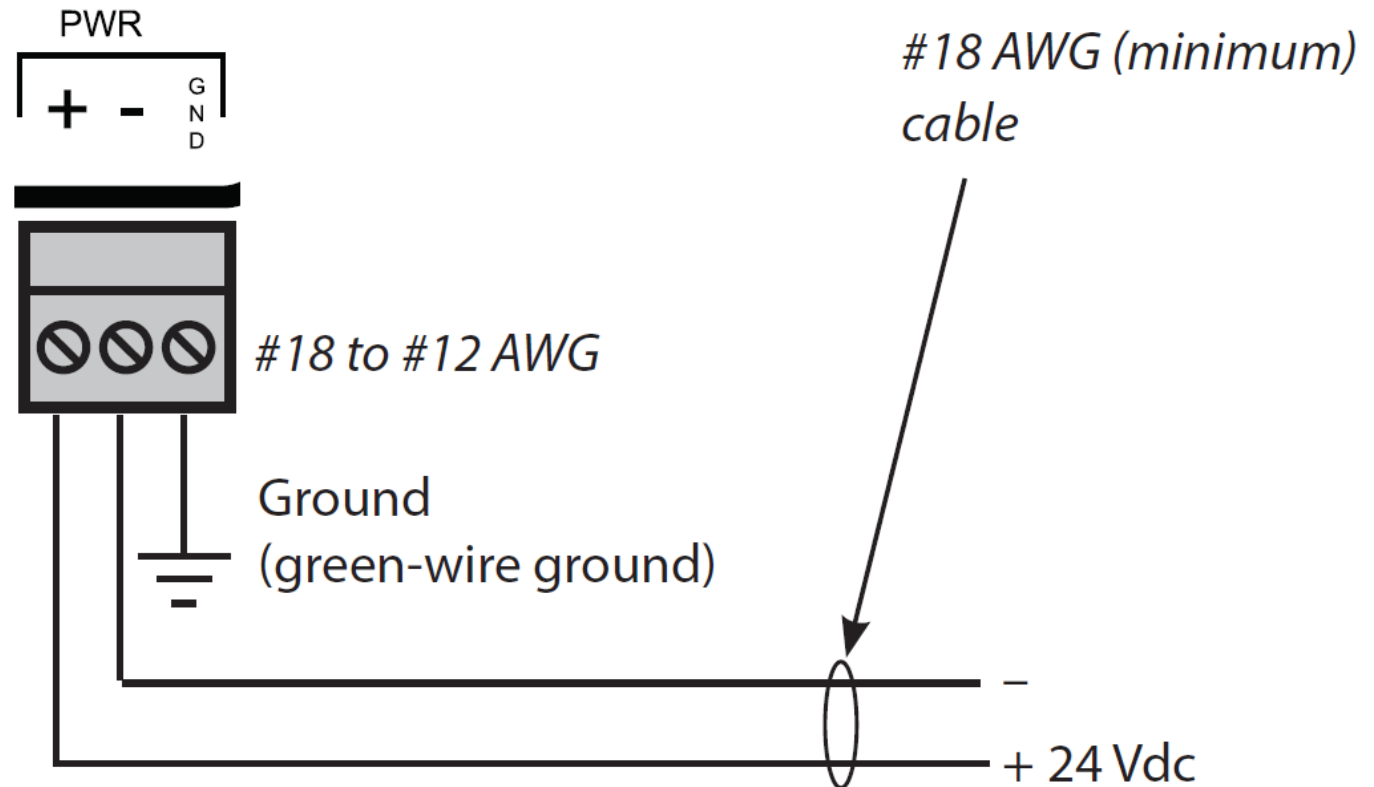

The SER requires a nominal 24 VDC, 7 VA control power source. The SER requires a nominal 24 VDC, 7 VA control power source.


## Time Sync IN (IRIG-B or DCF77)

The SER can be configured to receive legacy time protocols (IRIG-B or DCF77) using option wiring accessories (EZC-IRIG-B or EZC-DCF77). For additional information, see the SER-32e User Guide and EZC instruction bulletin.

## Time Sync OUT (IRIG-B, DCF77 or 1 per 10)Time Sync OUT (IRIG-B, DCF77 or 1 per 10)

When the master time source is PTP or NTP, the SER can be configured to output legacy time protocols (IRIG-B, DCF77, 1 per 10) using optional wiring accessories (PLX-5V or PLX-24V). For additional information, see the SER-32e User Guide and the PLX Instruction Bulletin.

## Trigger Output

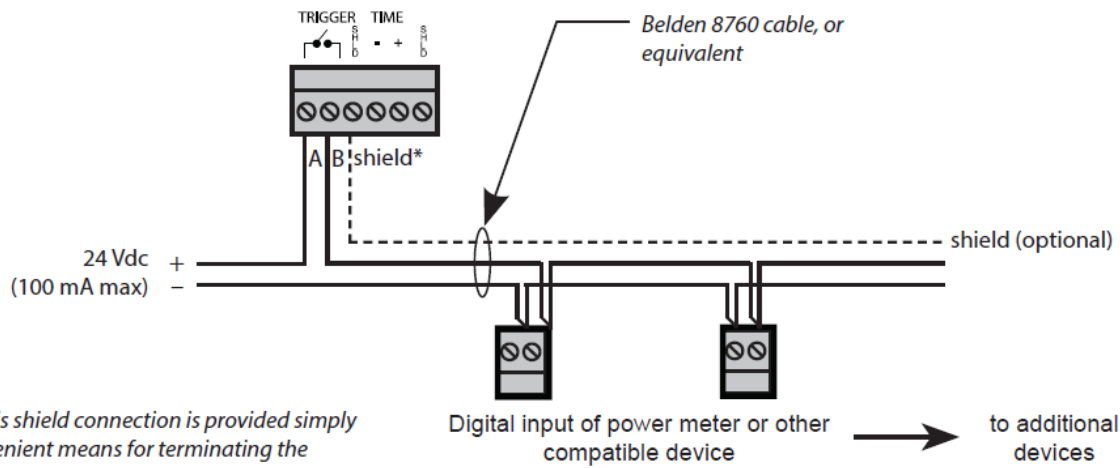

The Trigger Output can be used to initiate action in other devices such as a waveform capture, annunciation, or control.


**Note:** this shield connection is provided simply as a convenient means for terminating the cable shield; it is not connected internally within the CyTime SER.

For More Information on Sequence of Events Recorders, Visit: [www.cyber-sciences.com](http://www.cyber-sciences.com)

Cyber Sciences, Inc. (CSI) 229 Castlewood Drive, Suite E Murfreesboro, TN 37129 USA Tel: +1 615-890-6709  
Fax: +1 615-439-1651

The service marks, CyTime, and the Cyber Sciences stylized logo are trademarks of Cyber Sciences. All other trademarks are the property of their respective owners.

## Documents / Resources

	<p><b><a href="#">CYBER SCIENCES CyTime SER-32e Sequence of Events Recorder with 4.3 Inch Color Touchscreen Display</a> [pdf] User Guide</b></p> <p>CyTime SER-32e, Sequence of Events Recorder with 4.3 Inch Color Touchscreen Display, CyTime SER-32e Sequence of Events Recorder with 4.3 Inch Color Touchscreen Display</p>
---	---

## References

-  [Sequence of Events Recorders | Monitor & Restore Power Quickly](#)