



DACNET DGD-DALI-DMX DGD Gateway Owner’s Manual

[Home](#) » [DACNET](#) » DACNET DGD-DALI-DMX DGD Gateway Owner’s Manual 

DACNET

DALCNET
DGD GATEWAY
Device Manual



Contents

1 FEATURES

2 PRODUCT CODE

3 PROTECTIONS

4 REFERENCE STANDARDS

5 TECHNICAL SPECIFICATION

6 INSTALLATION

7 MECHANICAL DIMENSION

8 TECHNICAL NOTES

9 DGD-DALI-DMX SETUP – CONVERSION FROM DALI PROTOCOL TO DMX PROTOCOL

10 DGD-DMX-DALI SETUP – CONVERSION FROM DMX PROTOCOL TO DALI PROTOCOL

11 Documents / Resources

11.1 References

12 Related Posts

FEATURES

- CONVERTER+BUS
- DC Input: 12-24-48 Vdc
- BUS Command: DMX o DALI
- Converter from DALI protocol to DMX protocol
- Converter from DMX protocol to DALI protocol
- Possibility to control device with protocol DALI by protocol DMX and viceversa
- Extended temperature range
- 100% Functional Test – 5 Years warranty

→ For the whole and update Device Manual refer to producer's website: <http://www.dalcnet.com>

➤ PRODUCT CODE

CODE	Input Voltage	Channel	Input command	Output command	
DGD-DMX-DALI ¹	12-48V DC	1	DMX	DALI	CONVERTER
DGD-DALI-DMX	12-48V DC	1	DALI	DMX	CONVERTER

➤ PROTECTIONS

O V P	Over voltage protection ²	✓
U V P	Under voltage protection ²	✓
R V P	Reverse polarity protection ²	✓
IF P	Input fuse protection ²	✓

¹It requires power supply in the DALI bus

²Only control logic protection

➤ REFERENCE STANDARDS

EN 61347-1	Lamp controlgear – Part 1: General and safety requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purpose – EMC immunity requirements

➤ TECHNICAL SPECIFICATION


Supply Voltage		Constant Voltage min: 10,8 Vdc .. max: 52,8 Vdc		
Nominal Power ³		DMX-DALI Variant Typ	DALI-DMX Variant	
			Min	Max
	@12 V	101 mW	100 mW	184 mW
	@24 V	161 mW	156 mW	248 mW
	@48 V	274 mW	279 mW	380 mW
Power loss in stand by mode		<500mW		
Storage Temperature		min: -40 max: +60 °C		
Ambient Temperature ³		min: -10 max: +40 °C		
Protection grade		IP10		
Wiring		2.5mm2 solid – 2.5mm2 stranded – 30/12 AWG		
Wire preparation length		5,5 – 6,5 mm		
Mechanical dimensions		92 x 36 x 62 mm DIN RAIL 2M		
Package dimension		124 x 71 x 48 mm		
Casing material		Plastic		
Weight		90g		

³Maximum value, dependent on ventilation conditions.

➤ INSTALLATION


Follow the drawing below to set the product:

1. Connect the BUS at terminal block of the device (depending on the DGD variant).
2. Connect the power supply (12-48Vdc) to the device terminal blocks “DC IN”.

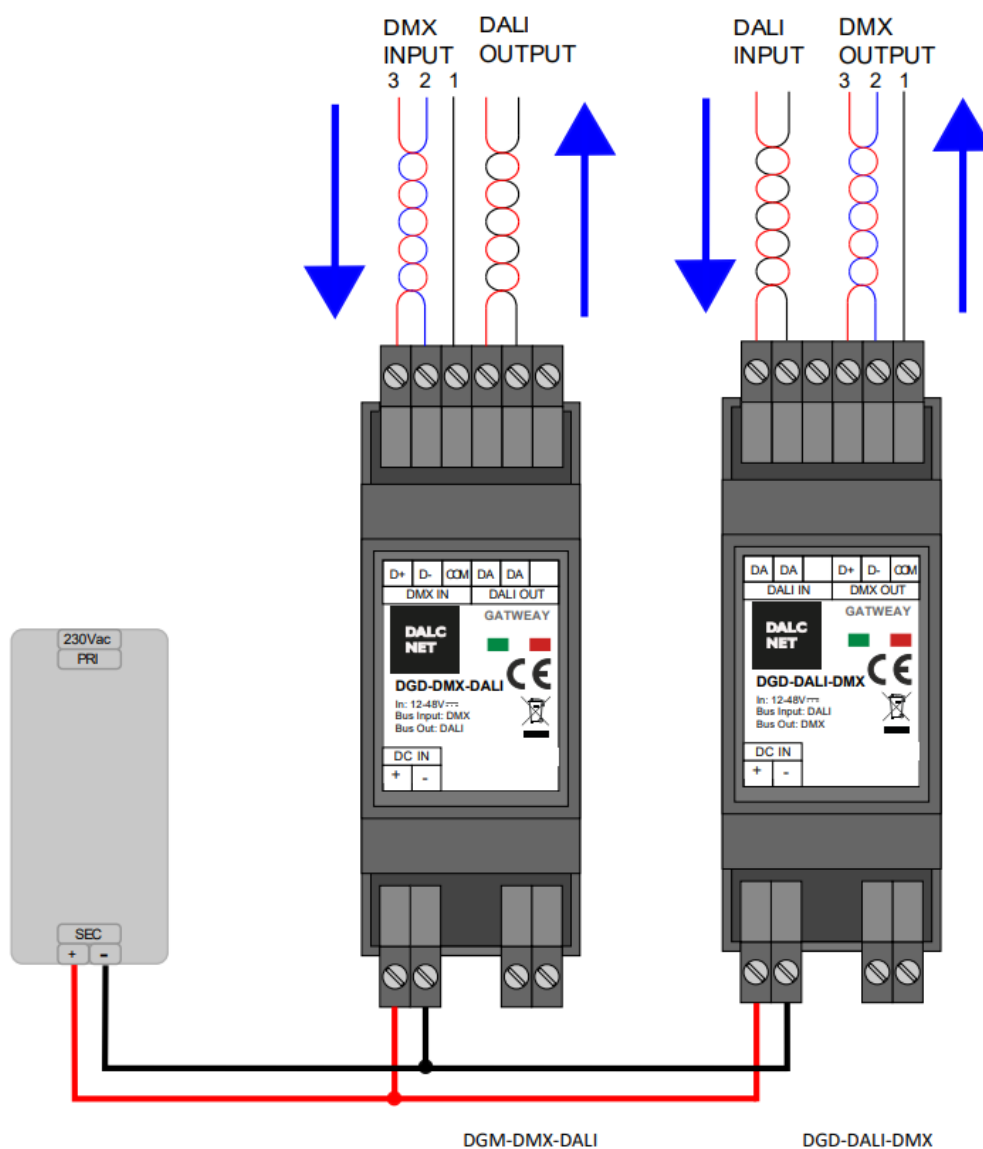

➤ MECHANICAL DIMENSION

(terminals excluded)

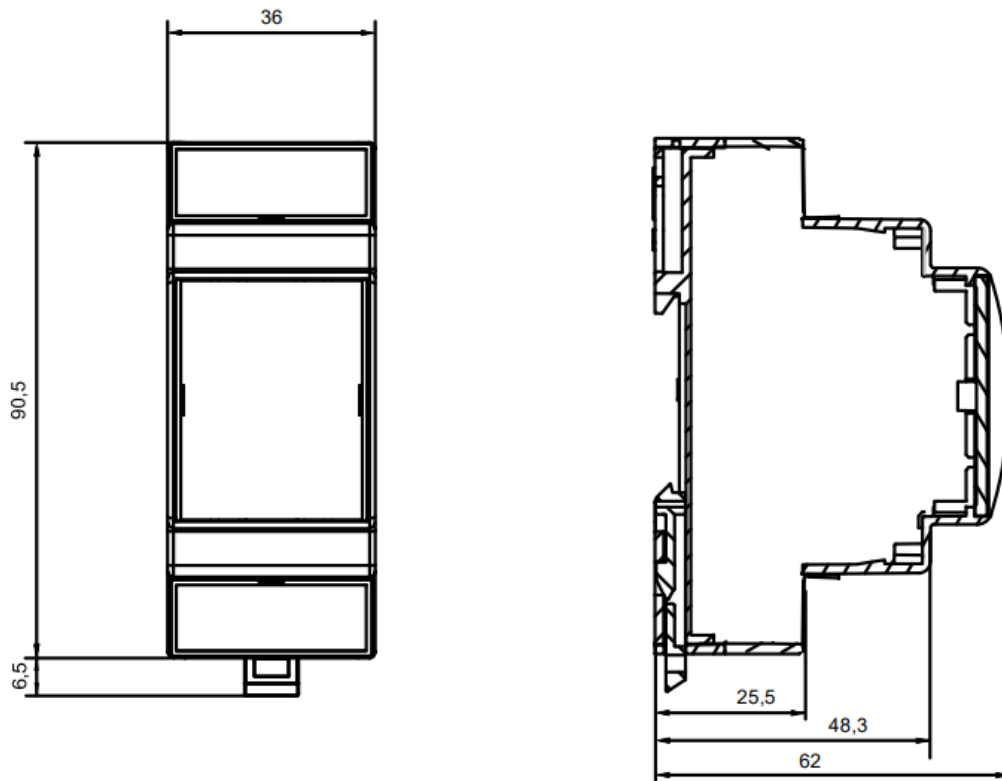

➤ TECHNICAL NOTES

Installation:

- Installation and maintenance must be performed only by qualified personnel in compliance with current regulations.
- The product must be installed inside an electrical panel protected against overvoltages.
- The product must be installed in a vertical or horizontal position with the cover / label upwards or vertically; Other positions are not permitted. It is not permitted to bottom-up position (with the cover / label down).
- Keep separated the circuits at 230V (LV) and the circuits not SELV from circuits to low voltage (SELV) and from any connection with this product. It is absolutely forbidden to connect, for any reason whatsoever, directly or indirectly, the 230V mains voltage to the bus or to other parts of the circuit.

Power Supply:

- For the power supply use only a SELV power supplies with limited current, short circuit protection and the power must be dimensioned correctly. In case of using power supply with ground terminals, all points of the protective earth (PE = Protection Earth) must be connected to a valid and certified protection earth.
- The connection cables between the power source “low voltage” and the product must be dimensioned correctly and they should be isolated from every wiring or parts at voltage not SELV. Use double insulated cables.
- Dimension the power supply for the load connected to the device. If the power supply is oversized compared with the maximum absorbed current, insert a protection against over-current between the power supply and the device.


Command:

- The length and type of the connection cables at the BUS (DMX512, DALI or other) use cables as per

specification of the respective protocols and regulations and they should be isolated from every wiring or parts at voltage not SELV. It is suggested to use double insulated shielded and twisted cables.

- All the product and the control signal connect at the bus (DMX512, DALI or other) must be SELV (the devices connected must be SELV or supply a SELV signal)

DGD-DALI-DMX SETUP – CONVERSION FROM DALI PROTOCOL TO DMX PROTOCOL

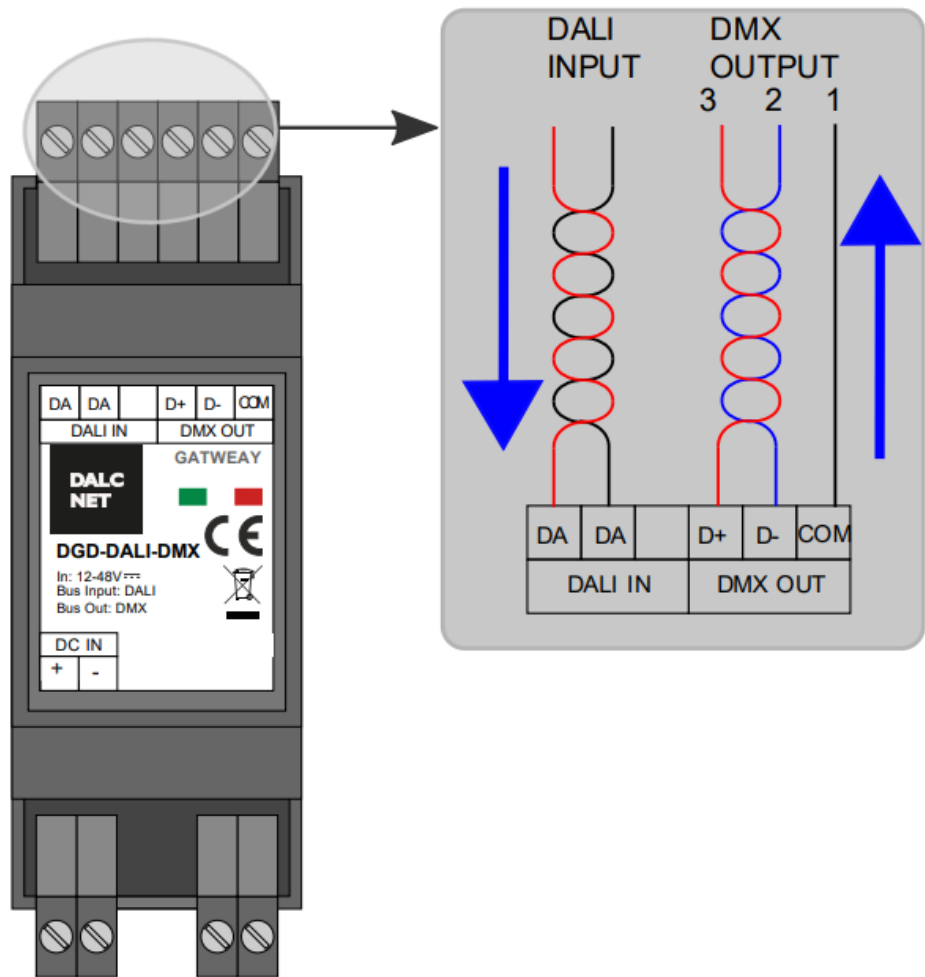

Signal LED:

In the case of no bus power detected, or bus error, the led blinks fast (2 pulsed per second).

In the case of bus power but no data, led blinks slow (1 pulse per second).

In the case of data link active, the led stands on.

Conversion

The DGD-DALI-DMxX convert all 64 DALI addresses in 64 DMX Channels.

The DGD-DALI-DMX convert from DALI protocol to DMX protocol and not viceversa.

The device does not manage the addressing of DALI bus. The addresses DALI from 0 to 63 is fixed and it is sent to DMX channel from 1 to 64. The commands implemented are: OFF, UP, DOWN, STEP UP, STEP DOWN, DIRECT ARC POWER, CALL MIN LEVEL, CALL MAX LEVEL, GOTO LAST ACTIVE LEVEL. The values of the commands are not stored in the absence of the supply voltage.


Conversion Table from DALI Addresses to DMX Channels:

Addr DALI	Channel DMX
+0	1
+1	2

+2	3
+3	4
+4	5
+5	6
+6	7
+7	8
+8	9
+9	10
+10	11
+11	12
+12	13
+13	14
+14	15
+15	16
+16	17
+17	18
+18	19
+19	20
+20	21
+21	22
+22	23
+23	24
+24	25
+25	26
+26	27
+27	28
+28	29
+29	30
+30	31
+31	32
+32	33
+33	34
+34	35

+35	36
+36	37
+37	38
+38	39
+39	40
+40	41
+41	42
+42	43
+43	44
+44	45
+45	46
+46	47
+47	48
+48	49
+49	50
+50	51
+51	52
+52	53
+53	54
+54	55
+55	56
+56	57
+57	58
+58	59
+59	60
+60	61
+61	62
+62	63
+63	64

➤ **DGD-DMX-DALI SETUP – CONVERSION FROM DMX PROTOCOL TO DALI PROTOCOL**

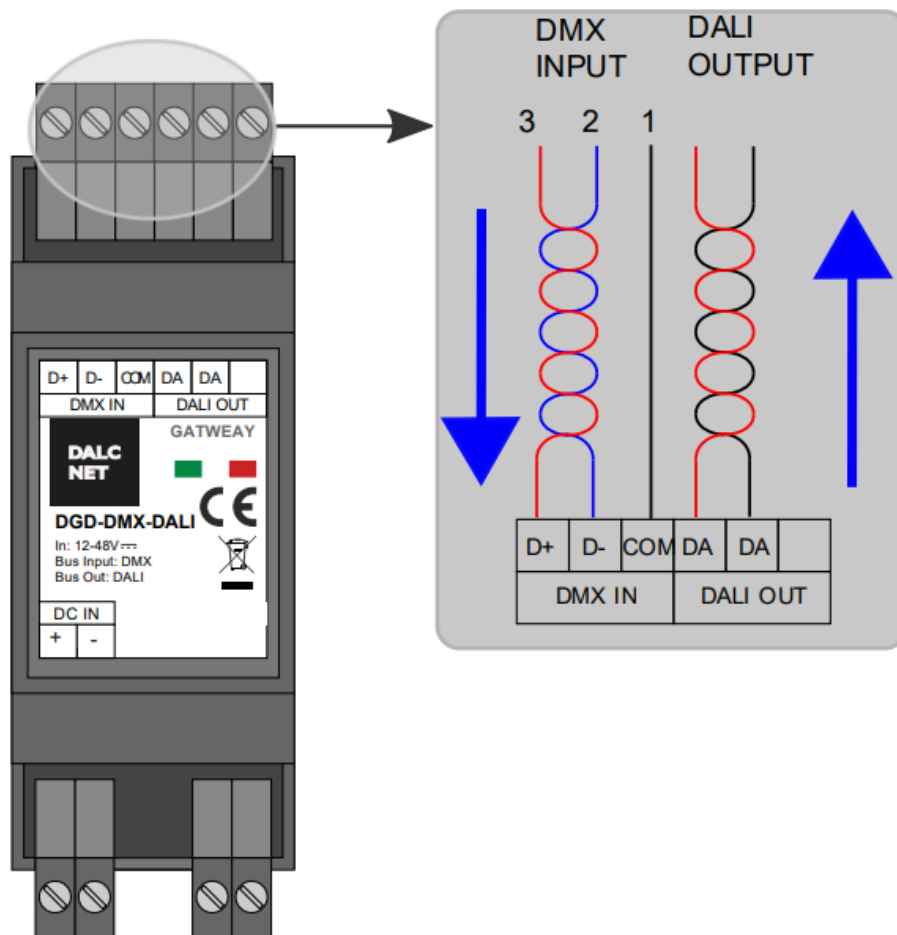

Signal LED:

In the case of bus error, the led blinks fast (2 pulsed per second).

In the case of no bus detected, led blinks slow (1 pulse per second).

In the case of data link active, the led stands on.

Conversion

The DGD-DMX-DALI convert only the first 64 DMX Channels in 64 DALI addresses.

The DGD-DMX-DALI converter from DMX protocol to DALI protocol and not viceversa.

The DMX channels from 1 to 64 is fixed and it is sent to DALI addresses from 0 to 63 by DIRECT ARC POWER command.

NOTE: The DGD-DMX-DALI requires power supply in the DALI bus. The devices DALI must be addressed through DALI programmer (for example with cod. DGM01-1248).

Conversion Table from DMX Channels to DALI Addresses

Channel DMX	Addr DALI
1	+0
2	+1
3	+2
4	+3
5	+4
6	+5
7	+6
8	+7
9	+8

10	+9
11	+10
12	+11
13	+12
14	+13
15	+14
16	+15
17	+16
18	+17
19	+18
20	+19
21	+20
22	+21
23	+22
24	+23
25	+24
26	+25
27	+26
28	+27
29	+28
30	+29
31	+30
32	+31
33	+32
34	+33
35	+34
36	+35
37	+36
38	+37
39	+38
40	+39
41	+40
42	+41

43	+42
44	+43
45	+44
46	+45
47	+46
48	+47
49	+48
50	+49
51	+50
52	+51
53	+52
54	+53
55	+54
56	+55
57	+56
58	+57
59	+58
60	+59
61	+60
62	+61
63	+62
64	+63

DACNET




Made in Italy

Rev.06/11/2023

DALCNET S.r.l, Registered office: Via Lago di Garda, 22 – 36077 Altavilla Vicentina (VI) – Italy



Headquarters: Via Lago di Garda, 22 – 36077 Altavilla Vicentina (VI) – Italy

VAT: IT04023100235 – Tel. +39 0444 1836680 – www.dalcnet.com – info@dalcnet.com



[DACNET DGD-DALI-DMX DGD Gateway](#) [pdf] Owner's Manual
DGD-DMX-DALI1, DGD-DALI-DMX, DGD-DALI-DMX DGD Gateway, DGD Gateway, Gateway

References

-  [Led dimmer and RGB controller for professional lighting systems](#)
-  [Led dimmer and RGB controller for professional lighting systems](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.