HOROW HWMT-8733

HOROW HWMT-8733 One Piece Toilet User Manual

Model: HWMT-8733 | Brand: HOROW

Product Overview

The HOROW HWMT-8733 is a compact, one-piece toilet designed for modern bathrooms, especially those with limited space. It features a powerful and quiet dual-flush system, a comfortable 16.5-inch seat height, and a fully glazed bowl for easy cleaning. This manual provides essential information for installation, operation, maintenance, and troubleshooting to ensure optimal performance and longevity of your toilet.



Figure 1: HOROW HWMT-8733 One Piece Toilet.

Key Features

- **Compact Design:** Measures 25"D x 13.4"W x 28.4"H, ideal for small bathrooms and tight spaces.
- **Comfort Height:** 16.5-inch seat height for easier sitting and standing.
- **Dual Flush System:** Offers 1.6 GPF (gallons per flush) for full flush and 1.1 GPF for light flush, promoting water efficiency.
- **Easy to Clean:** Fully glazed bowl and one-piece skirted design minimize areas for dirt accumulation.
- **Soft-Closing Seat:** PP seat closes quietly, preventing slamming.
- **Standard Rough-In:** Designed for a 12-inch rough-in installation.
- **Certifications:** cUPC, UPC, CEC compliant.



Figure 2: HWMT-8733 Toilet Features.

INSTALLATION

The HOROW HWMT-8733 toilet is designed for straightforward installation. It comes with pre-installed components to simplify the process.

Before You Begin

- Ensure you have all included components: toilet, soft-closing toilet seat, pre-installed flush valve, high-quality wax ring, and floor bolts.
- Verify your rough-in measurement is 12 inches.
- Turn off the water supply to the existing toilet and flush to empty the tank.
- Remove the old toilet and clean the flange area thoroughly.

Installation Steps (Summary)

1. Install the floor bolts onto the toilet flange.
2. Place the wax ring around the toilet's waste outlet.
3. Carefully set the toilet onto the floor bolts, ensuring proper alignment with the wax ring and flange.
4. Secure the toilet to the floor using the provided nuts and washers, tightening them evenly.
5. Connect the water supply line to the toilet's fill valve.
6. Turn on the water supply and check for leaks.
7. Install the soft-closing toilet seat. The side access points facilitate easier installation.



Figure 3: Inlet Valve Suggested Location.

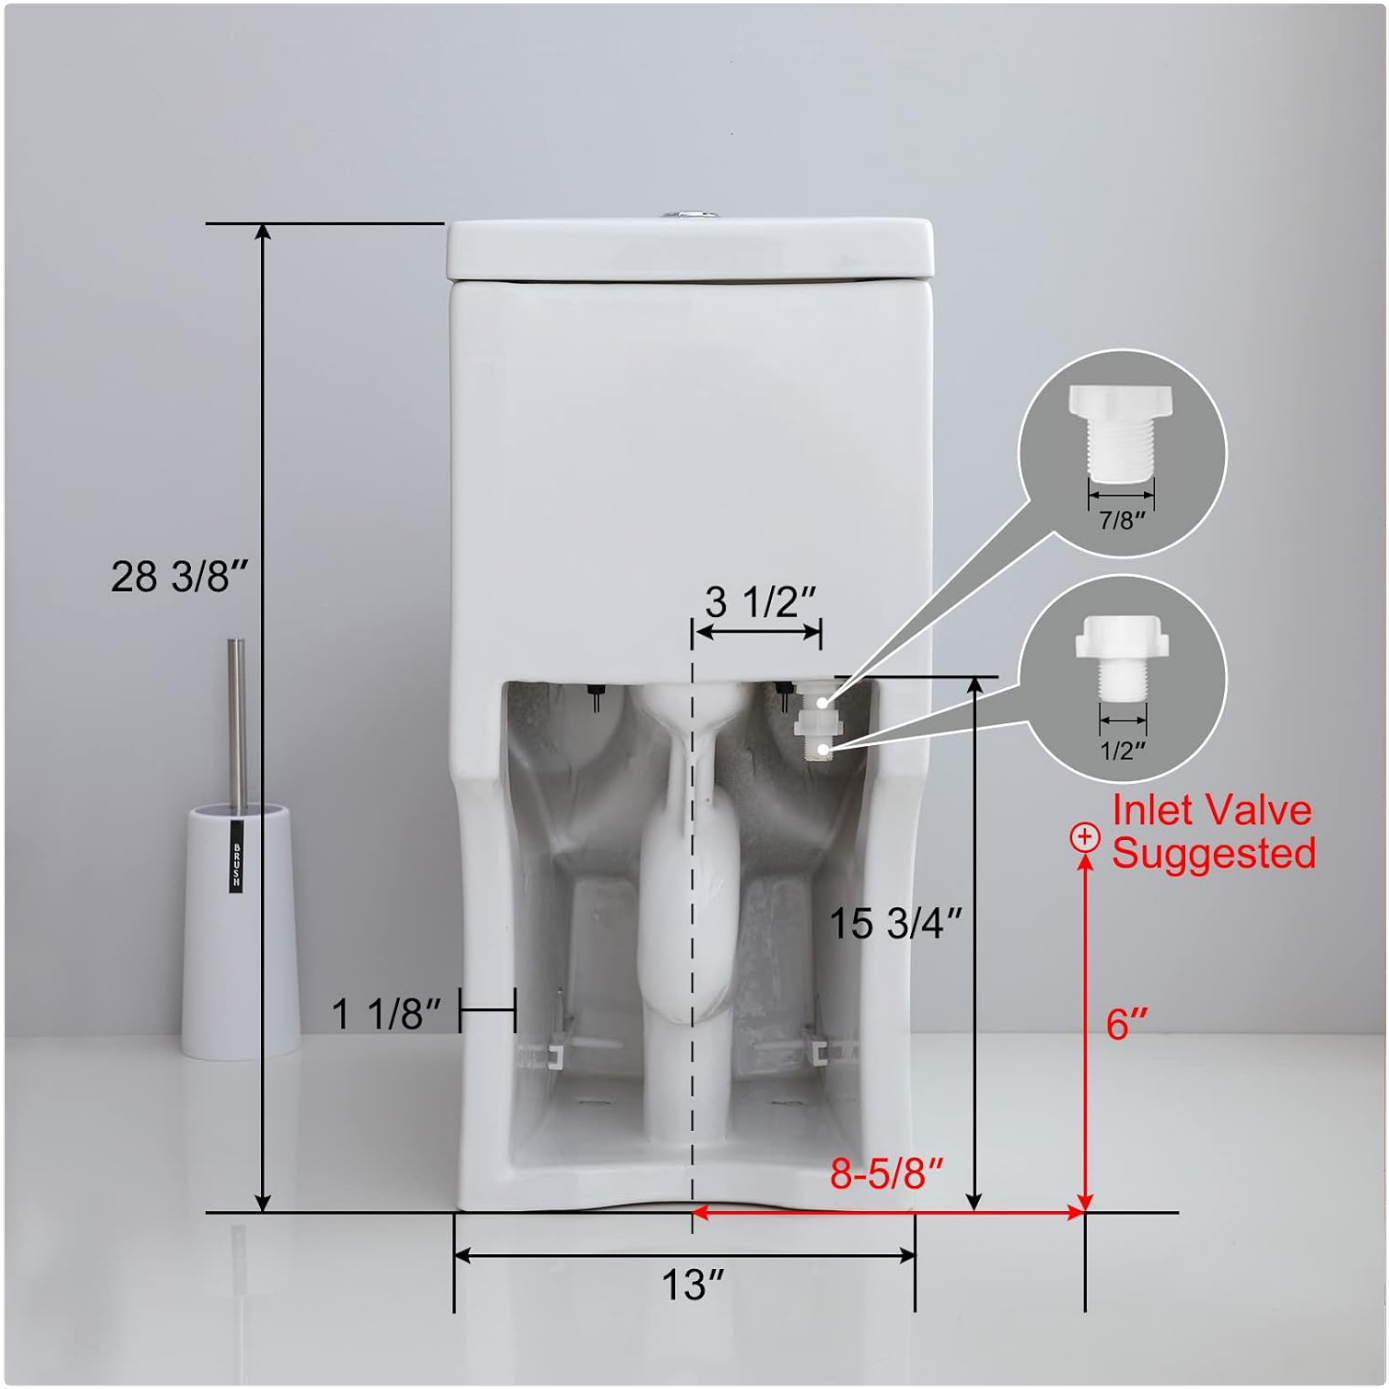


Figure 4: Rear Dimensions and Inlet Valve Details.

Operation

The HOROW HWMT-8733 features a dual-flush system for efficient water usage.

Dual Flush Mechanism

- **Light Flush (1.1 GPF):** Press the smaller button on the top of the tank for liquid waste. This option conserves water.
- **Full Flush (1.6 GPF):** Press the larger button on the top of the tank for solid waste. This provides a powerful flush to ensure the bowl is clean.

Soft-Closing Seat

The toilet seat is designed to close slowly and quietly. Simply push the seat down gently, and it will lower itself without slamming, preventing noise and potential damage.



Figure 5: Soft-Closing Seat in action.

Maintenance

Regular cleaning and maintenance will ensure the longevity and optimal performance of your HOROW toilet.

Cleaning the Toilet

- The fully glazed bowl is designed to resist stains and make cleaning easy. Use a mild, non-abrasive bathroom cleaner and a soft brush or cloth.
- For the exterior, including the skirted trapway, wipe with a damp cloth and mild detergent. Avoid harsh chemicals or abrasive scrubbers that can damage the ceramic finish.
- Clean the toilet seat with a soft cloth and mild soap. Avoid strong disinfectants that may degrade the plastic material over time.

Seat Maintenance

The upgraded toilet seat is designed for stability and durability. If the seat becomes loose, gently tighten the mounting

bolts accessible from the side. Do not overtighten.



Figure 6: Upgraded Toilet Seat Features.

Troubleshooting

This section addresses common issues you might encounter with your HOROW HWMT-8733 toilet. For more detailed troubleshooting, refer to the official Troubleshooting Guide PDF available on the product page.

Common Troubleshooting Issues

Problem	Possible Cause	Solution
Toilet not flushing properly (weak flush)	Low water level in tank, clogged siphon jet or rim holes, flapper not opening fully.	Adjust water level in tank, clean siphon jet/rim holes, check flapper chain for kinks or proper length.

Problem	Possible Cause	Solution
Toilet runs continuously	Flapper not sealing, fill valve malfunction, float ball out of adjustment.	Check flapper for debris or wear, adjust float ball, inspect fill valve.
Water leaks from base of toilet	Loose floor bolts, faulty wax ring, cracked toilet base.	Tighten floor bolts (do not overtighten), replace wax ring, contact support if ceramic is cracked.

If issues persist, please contact HOROW customer support for assistance.

SPECIFICATIONS

HOROW HWMT-8733 Product Specifications

Attribute	Detail
Model Number	HWMT-8733
Color	White
Product Dimensions (D x W x H)	25" x 13.4" x 28.4"
Material	Ceramic (Toilet), Plastic (Seat)
Item Weight	90 Pounds
Installation Type	Floor Mounted
Shape	Round
Flush Type	Dual (1.6 GPF / 1.1 GPF)
Rough-In	12 Inches
Seat Height	16.5 inches
Certification	CEC, Energy Star, cUPC
Included Components	Toilet, Soft Closing Toilet Seat, Pre-installed Flush Valve, Wax Ring, Floor Bolts, Installation Instruction Manual

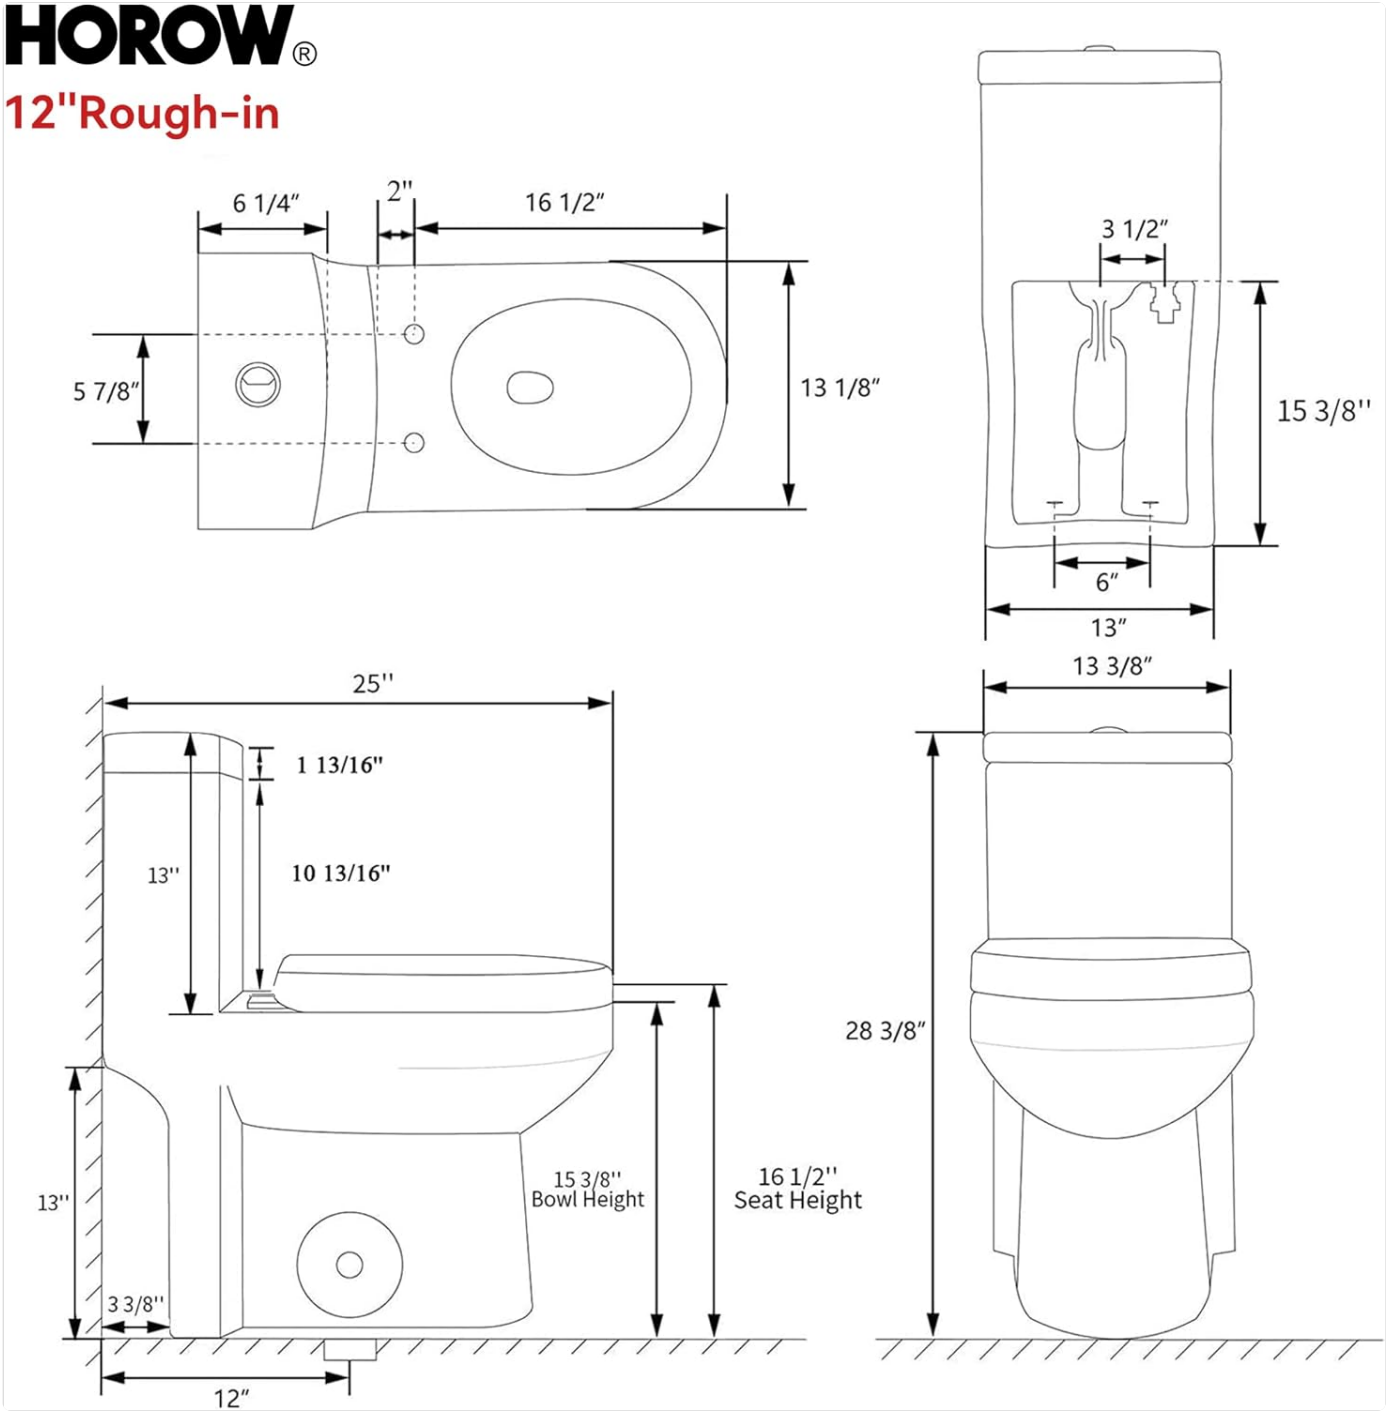


Figure 7: Detailed Product Dimensions.

Warranty and Support

HOROW is committed to providing high-quality products and excellent customer service.

Warranty Information

The HOROW HWMT-8733 toilet comes with a **2-year limited warranty**. Additionally, HOROW offers lifetime after-sales service for this product. This warranty covers defects in materials and workmanship under normal use.

Customer Support

If you encounter any issues or have questions regarding your HOROW product, please contact our customer service center. We aim to respond to messages within 12 hours.

- **Email:** support@horow.com
- **Seller:** Horow (via Amazon)

For additional resources, you may refer to the officialUser Manual (PDF), Installation Manual (PDF), and Troubleshooting Guide (PDF) provided by HOROW.

© 2024 HOROW. All rights reserved.