



DALI Zigbee3.0 Constant Current LED Driver Instruction Manual

[Home](#) » [DALI](#) » DALI Zigbee3.0 Constant Current LED Driver Instruction Manual 

Contents

1 DALI Zigbee3.0 Constant Current LED Driver

2 Features

3 Technical Parameters

4 Applications

5 Features

6 Mechanical Structures and Installations

7 Technical Parameters

8 Applications

9 App Operating Instructions


10 Documents / Resources

10.1 References

11 Related Posts



DALI Zigbee3.0 Constant Current LED Driver

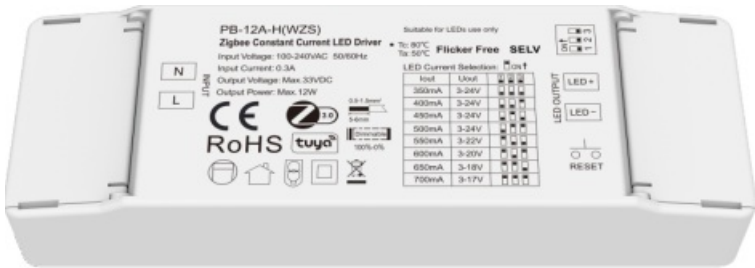

Zigbee3.0 Constant Current LED Driver

Model No.	PB-12A-H(WZS), PB-12A-L(WZS)
-----------	------------------------------

Features

- Tuya APP cloud control
- Support brightness adjust
- Delay turn on/off
- Timer run
- Scene edit
- Sleep wake-up
- Biorhythms function

Technical Parameters


Digital Dimming	ON
Over-heat Protection	Yes
Multiple Current	123
Over Load Protection	Yes
Short Circuit Protection	Yes
Warranty	5 years

Applications

Suitable for downlight, spotlight and decorative applications. Office / Commercial / Domestic Lighting, Hotels, Classrooms, Warehouse, Health care, Retail and Display. Use for retrofit upgrades & new luminaire designs.

Model No.: PB-12A-H(WZS),PB-12A-L(WZS)


Features



- Tuya APP cloud control, support brightness adjust, delay turn on/off, timer run, scene edit, sleep wake-up and biorhythms function
- Philips HUE APP control by connect with Philips HUE bridge
- Voice control, support Alexa, Google, Amazon ECHO and TmallGenie smart speaker
- Can relay and route to each other, up to 15 hops
- Match with Zigbee 3.0 remote or scene panel control optional
- RESET button for clearing network connection
- Universal AC input / Full range
- Flicker – Free
- 1 channel constant current output, configurable current via DIP switch
- Synchronize on multiple number of LED drivers
- Over-heat / Over-load / Short circuit protection, recover automatically
- Full protective plastic case

- Suitable for indoor LED lighting application
- 5 Year, 50,000hr warranty

Mechanical Structures and Installations

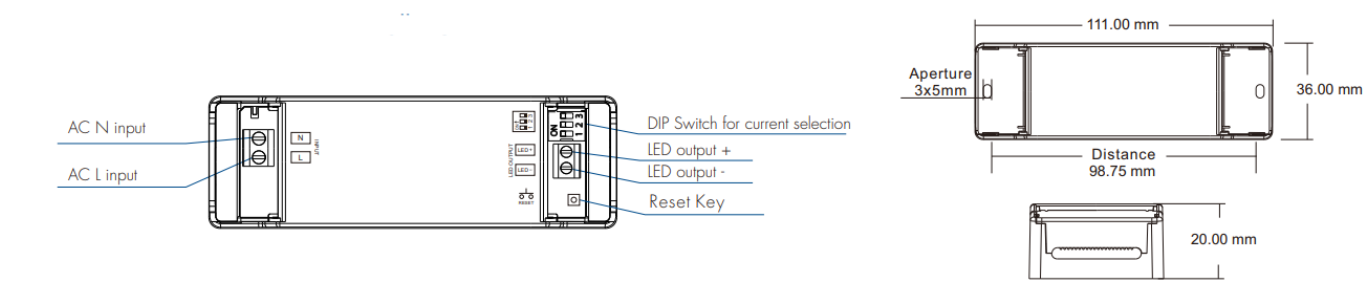




























Technical Parameters

Model		PB-12A-H(WZS)	PB-12A-L(WZS)
Output	Output Voltage	3-24VDC	9-45VDC
	Max Output Voltage	33VDC	48VDC
	Output Current	350-700mA	100-450mA
	Output Power	Max. 12W	
	Dimming Range	0 100 , dimming depth:0.5%	
	PWM Frequency	4000Hz	
	Current Accuracy	±5	
	Ripple & Noise	< 100mV	
Input	Input Voltage Range	100 240VAC	
	Frequency Range	50/60Hz	
	Efficiency	>79%/230VAC	>80%/230VAC
	Alternating Current	0.3A/115VAC, 0.15A/230VAC	
	Anti Surge	L-N:1KV	
	Inrush Current	Cold start 27A at 230VAC	
	Leakage Current	< 0.5mA/230VAC	
	No Load Power	< 2W	
Protection	Over Load Power	Hiccup,recovers automatically after fault condition is removed	
	Short Circuit	Hiccup,recovers automatically after fault condition is removed	


Environment	Working Temperature	-20°C 50°C
	T-case Max	80°C
	Working Humidity	20 90 RH, non-condensing
	Storage Temp/Humidity	-40°C 80°C, 10 95 RH
	Temperature Coefficient	±0.03 /°C (0-50)
	Vibration Resistance	10-500Hz, 2G, 6min/cycle, X,Y,Z axes/2min
	IP Rating	IP20
Safety&EMC	Security Specifications	IEC/EN61347-1, IEC/EN61347-2-13
	Withstand Voltage	I/P-O/P: 3750VAC
	Insulation Resistance	I/P-O/P: 100MΩ/500VDC/25°C/70 RH
	EMC Emission	EN61000-3-2 Class C, IEC61000-3-2
	EMC Immunity	EN61000-4-2.3.4.5.6.8.11, EN61347
	Certifications	CE

LED Current Selection:

Model	  	  	  	  	  	  	  	  	  
PB-12A-H(WZS)	Output Voltage	3-24V	3-24V	3-24V	3-24V	3-22V	3-20V	3-18V	3-17V
	Output Current	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA
PB-12A-L(WZS)	Output Voltage	9-45V	9-45V	9-45V	9-45V	9-40V	9-34V	9-30V	9-26V
	Output Current	100mA	150mA	200mA	250mA	300mA	350mA	400mA	450mA

Applications

- Suitable for downlight, spotlight and decorative applications.
- Office / Commercial / Domestic Lighting, Hotels, Classrooms, Warehouse, Health care, Retail and Display.
- Use for retrofit upgrades & new luminaire designs.

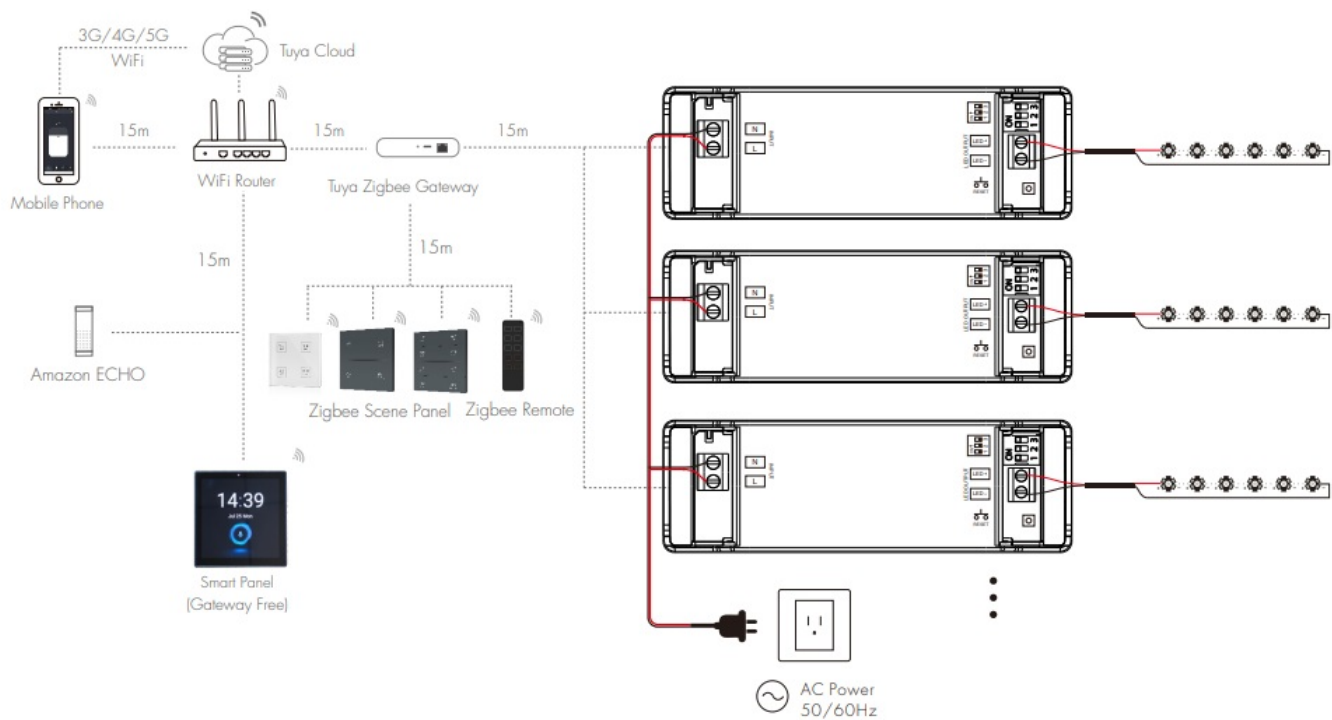

Note:

1. The above distance is measured in spacious (no obstacle) environment, Please refer to the actual test distance before installation.
2. Please check if the WiFi router net in 2.4G band, the 5G band is not available, and do not hide your router network.
3. Please keep the distance between LED driver and router close, and check the WiFi signals.
4. Users must use the Tuya ZigBee gateway to realize remote control and voice control (The smart panel integrate Zigbee gateway function).




App Operating Instructions

1. Network pairing

- Download the Tuya APP and register an account, search and add the Tuya Zigbee gateway device.
- Quickly press the “RESET” button five times or repeat power on and off five times to clear the previous network connection, enter pairing mode with the output light breathes blinking.
- Under the gateway, search and add new device. If the network connection is successful, you can find ZBS-DIM devices in Tuya APP.


2. Lighting control settings

- After pairing the light device, click the device and change brightness by touch brightness slide.

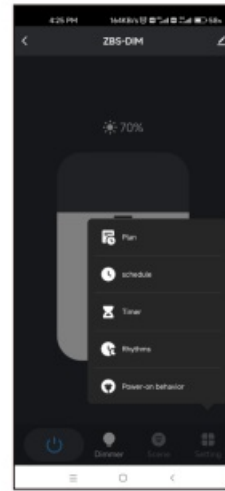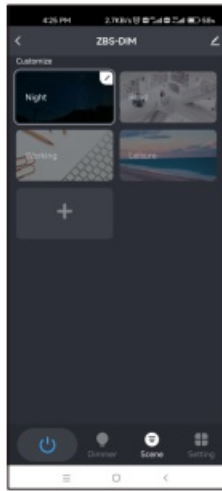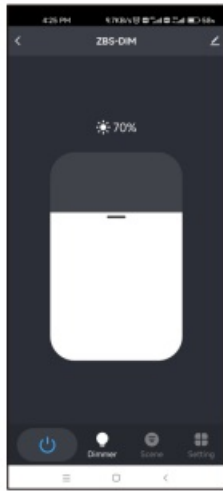

Guangzhou Skyacne Co.,Ltd
www.iskydance.cn

Documents / Resources

	<p>DALI Zigbee3.0 Constant Current LED Driver [pdf] Instruction Manual PB-12A-H WZS, PB-12A-L WZS, Zigbee3.0 Constant Current LED Driver, Zigbee3.0, Zigbee3.0 Current LED Driver, Constant Current LED Driver, Current LED Driver, Current Driver, LED Driver</p>
---	--

References

- 

[Manuals+.](#)