



Daviteq STHC-ISGWF-WS433-CL-04 iConnector WIFI User Guide

[Home](#) » [daviteq](#) » Daviteq STHC-ISGWF-WS433-CL-04 iConnector WIFI User Guide 

Contents

- 1 [Daviteq STHC-ISGWF-WS433-CL-04 iconnector WIFI](#)
- 2 [USER GUIDE FOR ICONNECTOR WIFI](#)
- 3 [Functions Change Log](#)
- 4 [Introduction](#)
- 5 [Specification](#)
- 6 [Operation principle](#)
 - 6.1 [LED meaning](#)
 - 6.2 [Memory Map](#)
 - 6.3 [Health data](#)
- 7 [Configure using the iConfig app on the phone](#)
- 8 [Connect iConnector to Templogger Pro Server System](#)
 - 8.1 [Check health a new Device](#)
- 9 [Installation](#)
 - 9.1 [IO Wiring](#)
- 10 [Example application](#)
- 11 [Troubleshooting](#)
- 12 [Support contacts](#)
 - 12.1 [Manufacturer](#)
- 13 [Documents / Resources](#)
 - 13.1 [References](#)
- 14 [Related Posts](#)





USER GUIDE FOR ICONNECTOR WIFI

This document is applied for the following products

SKU	STHC	HW Ver.	1.1	FW Ver.	w1.5_17101
Item Code	STHC-ISGWF-WS433-CL-04	iConnector WIFI, RS485/MODBUSRTU with built-in wireless co-ordinator			

Functions Change Log

HW Ver.	FW Ver.	Release Date	Functions Change
1.1	w1.5_17101	DEC-2021	

Introduction

STHC is a Smart IoT Gateway, aka iConnector, a main component in any IoT application. iConnector has a role to connect the real World's things like sensors, meters, ,machines...to server system for data logging, data analytics, monitoring & controls...iConnector support multiple Industrial Fieldbus like Modbus, EthernetIP, Profinet, CClink, Wireless sensor network...It connects to server system via LAN/WAN as Ethernet, WiFi or Cellular.

Specification

Host Communication	802.11b/g/n, 2.4Ghz, internal Wifi antenna, integrated wireless co-ordinator
--------------------	--

Host communication supports	TCP/IP, UDP/IP, FTP, HTTPS, SNMP...	
Fieldbus communcation	ModbusRTU x 01 port, 31 slaves, max 19.2 kpbs	
Vietnam Type Approval Cerification	QCVN 54:2011/BTTTT, QCVN 15:2015/BTTTT (DAVIT EQ B00122019)	
Power supply	7..48VDC, avg 200mA, peak 1.5A	
On-board memory & sensors	2MB Flash, PCB temperature sensor	
Electrical connectors	M12, 4-pin, coding A or 9mm Power Plug and USB port	
Buzzer	Internal buzzer	
Antenna	Internal Wifi antenna, standard external antenna 0 dbi, option 3dbi, 6dbi, 9dbi.	
RF frequency band	Free license ISM 433.92Mhz (for others 868, 915, 920M hz, refer related datasheets)	
Security Standard	AES-128	
Data speed	Up to 50kbps	
Operating Temperature/Humidity	-20 .. + 60 degC / 95%RH, non-condensing	
Housing/Protection	Aluminum+Polycarbonate. All version is IP67 protection	

Dimension	H130xW90xD40 for Ethernet/WiFi versions
Net weight	350 grams Ethernet/WiFi versions

Operation principle

LED meaning

LED status

Status	Meaning
Fixed ON	iConnector has been supplied with external power
Blinking (4 seconds blink 1 time)	Without external power, iConnector is using battery.
Blinking (2 seconds blink 1 time)	Low battery warning (Used for type D battery version)

LED modbus

Status	Meaning
Fixed ON	Modbus connected
Blinking (1 seconds blink 2 time)	Connection errors (wrong configuration of baudrate, noise, ...)
OFF	No modbus connection

LED network

Status	Meaning
Fixed ON	Connecting with Globiots
Blinking (1s change state)	Initializing wifi generator, waiting for configuration via phone or modbus tool (For iConnector wifi)
OFF	No connection with Globiots

Memory Map

- Data address area: 0x2000-0x22FF (768 bytes), and 0x6000-0x6FFF (4096 bytes).
- Controller address area: 0x3000-0x30FF (256 bytes, without flash storage), and 0x5000-0x50FF (256 bytes, with flash storage).

Address	Size (bytes)	Memory type	Read/Write	Description
0-0x1FFF	8096	FLASH	R/W	Save active configuration, do not allow log, realtime.
0x2000-0x22FF	768	RAM	R	Save data read from modbus slaves.
0x2300-0x24FF	512	RAM	R	The intrinsic data of iConnector
0x3000-0x30FF	256	RAM	R/W	
0x5000-0x50FF	256	FLASH	R/W	
0x6000-0x6FFF	4096	RAM	R	Save data read from modbus slaves

Address area 0x5000-0x50FF

- 256 bytes;
- Save in flash (when power is lost, will keep the same value);
- Allows reading, and writing from Globiots;
- Allow log (realtime);
- Allows Modbus write to Slaves;
- It is not allowed to store data read from Modbus Slaves.

NOTE:

Flash recorded about 100,000 times will be damaged so do not use this area to contain the value is changed several times.

Logged data

- Up to 20 different log cycles;
- 320 log parameters maximum for all log cycles.
- Up to 120 log parameters per log cycle.

Modbus

- Support modbus RTU.
- Address slave 1... 247.
- It is not allowed to set address slave = 0.

- Baudrate 4800/9600/19200.
- Parity none / odd / even.
- Up to 100 modbus instructions.
- The address area for storing read data: 0x2000-0x22FF (768 bytes), and 0x6000-0x6FFF (4096 bytes).
- Controller address area: 0x3000-0x30FF (256 bytes, without flash storage), and 0x5000-0x50FF (256 bytes, with flash storage).

Realtime

- Read up to 200 parameters.
- If all parameters are float (4 bytes) then read up to 140 parameters.
- The fastest realtime sending frequency is 1 second.

Alarm

- Up to 28 alarms.
- Supported data types:

PrmType	Description	# Byte	Range
1	BYTE	1	0 to 255
2	UINT16	2	0 to 65,535
3	UINT32	4	0 to 4,294,967,295
4	FLOAT	4	-/+3.40282347 * (10 ⁺³⁸)
5	INT16	2	-32,768 to 32,767
6	INT32	4	-2,147,483,648 to 2,147,483,647

Event

- The event table is 1024 bytes.
- The number of events depends on the short length of the event configured.
- Supported data types:

PrmType	Description	# Byte	Range
1	BYTE	1	0 to 255
2	UINT16	2	0 to 65,535
3	UINT32	4	0 to 4,294,967,295
4	FLOAT	4	-/+3.40282347 * (10 ⁺³⁸)
5	INT16	2	-32,768 to 32,767
6	INT32	4	-2,147,483,648 to 2,147,483,647

Health data

- Every 15 seconds send health pack 1 time.

Configure using the iConfig app on the phone


After supplying power the iConnector via M12 connector, only configure using the iConfig app within the first 5 minutes. Use app on android phone then configure the Wifi Name and Password that iConnector Wifi will connect to. **Please refer to how to configure using iConfig app with the following link:**
iConfig Mobile app for Android

Connect iConnector to Templogger Pro Server System

Login


Please visit the link to the login page: Templogger Pro – Login

If you do not have an account on the Templogger Pro Server System, please contact the Templogger Pro technical staff for assistance.

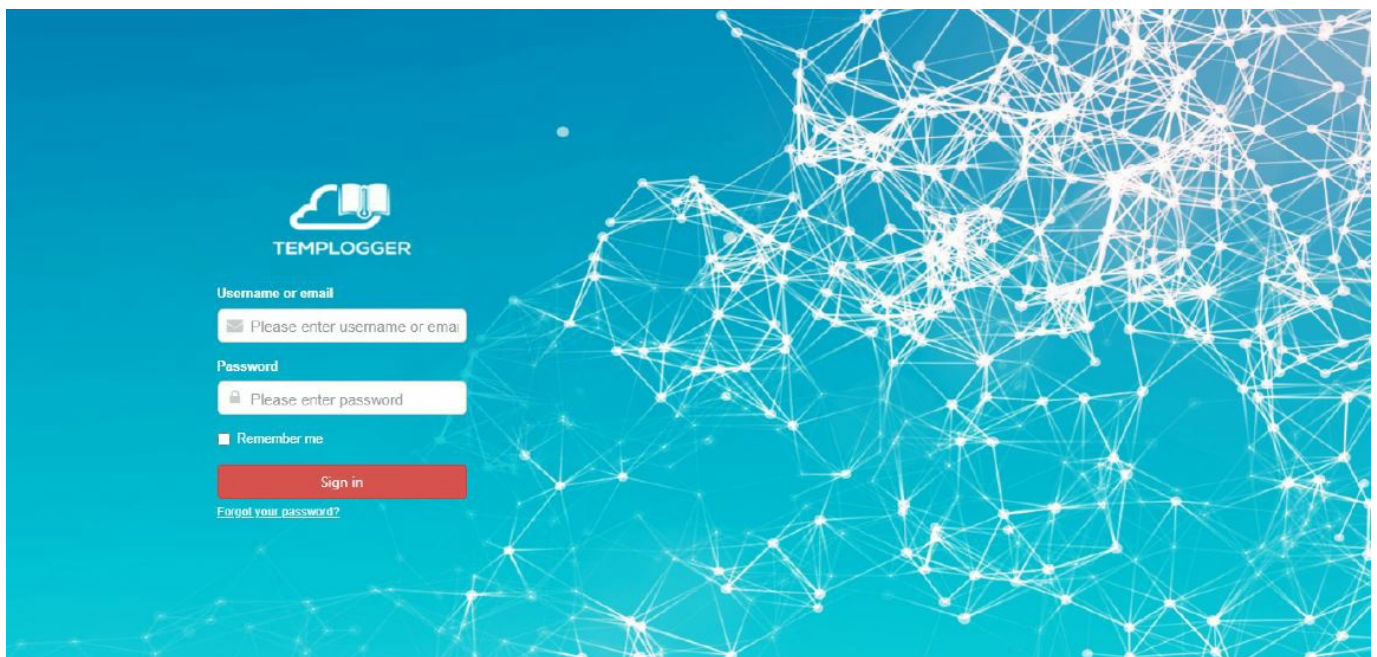

Add iConnector STHC to Templogger Pro Server System

To close or open "Organization Chart" panel, you can click on left corner of screen **Organization Chart** page includes all Node and Device in system:

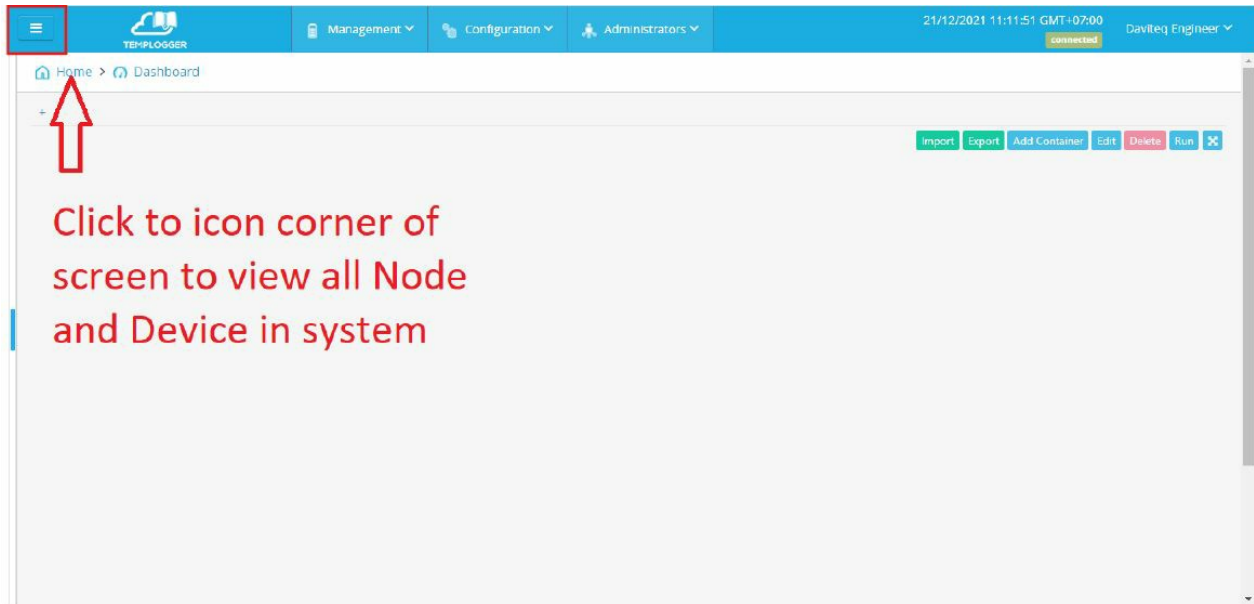


Click to icon corner of screen to view all Node and Device in system

Right click on Node name, menu of Node displays:

- **New:** Create new Node, Device
- **Delete:** Delete Node
- **Assign to account:** Assign Node and sub-Node to account
- **Rename:** Change name of Node

To create a new Device:

1. Select Node
2. Right click and select "New"
3. Click "Device" to create a new Device

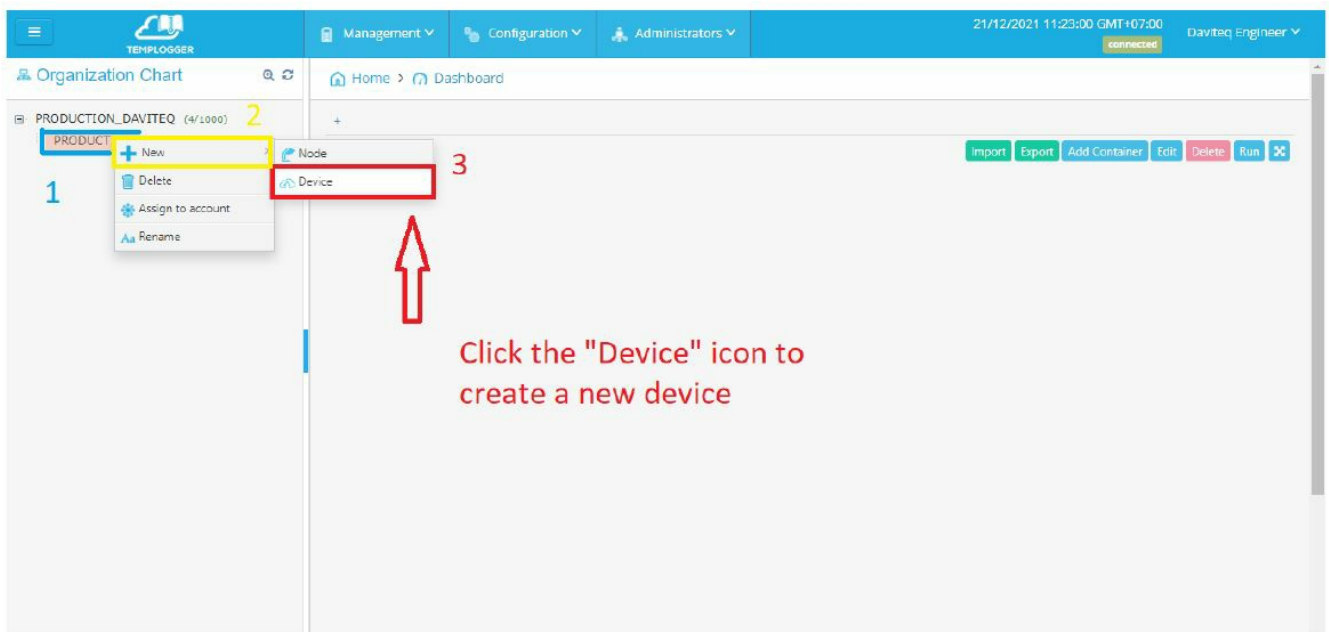

Click the "Device" icon to create a new device

4. A box appears:

Organization Chart

Home > Add Device

+ Add Device

Basic Information Configuration

Name* New device 1

Serial Number* 121601210503

Device ID (Text)*

Device ID (Hex)

FCC* 0091

Phone number

Created Date*

Last Updated*

Attached Data*

Generate

Scroll down to save

- **Enter parameters of Device:**
- **Name:** Name of Device (require 12 characters)
- **Serial Number:** provided by manufacturer (require 12 characters)
- Click “Generate” button to create a Device ID or enter ID directly
- **FCC:** provided by manufacturer (require 4 characters)
- Click “Save” button to continue. **A box appears:**
Serial Number , FCC : Please contact the Templogger Pro technical staff for assistance.

5. A box appears after save:

Organization Chart

Home > Add Device

+ Add Device

Basic Information Configuration

Memmap* 4.1.4-9600 - RD1

Logging send frequency* 5 minutes

Health send frequency* 5 minutes

Save


Select the same image and save. After save again at tab “Basic information”. Confirm the request and enter the account to create a new device.

Check health a new Device

To check health a new Device:

1. Select Node.
2. Select Monitoring Tab.

- **Health Status:** display Connection status between iConnector and server (Connected/Waiting for connect/Disconnected)
- **Config Status:** display synchronization status (Synchronized or Unsynchronized)

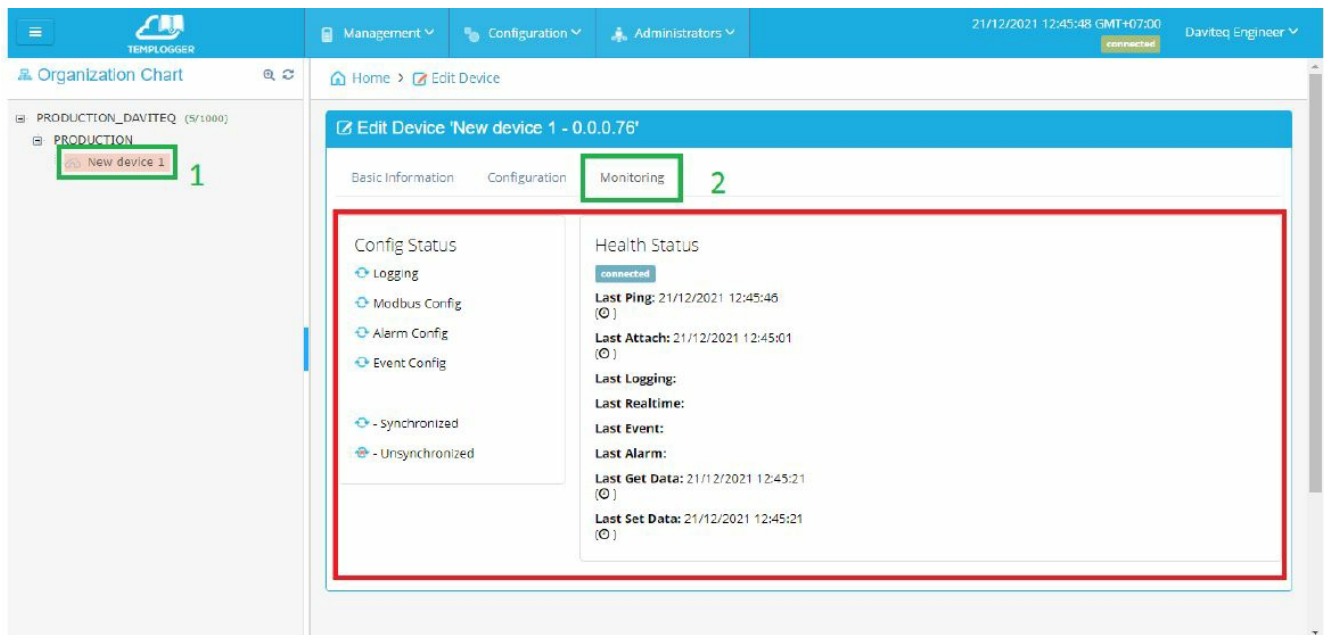


Installation

Installation location

Installed on a wall or in non-metal box. The bracket will be fixed on the wall or material with a planar surface with 2 x M4 screws;

ATTENTION:


DO NOT install the iConnector inside a completed metallic box or housing, because the RF signal can not pass through the metallic wall. The housing is made from Non-metallic materials like plastic, glass, wood, leather, concrete, cement...is acceptable.

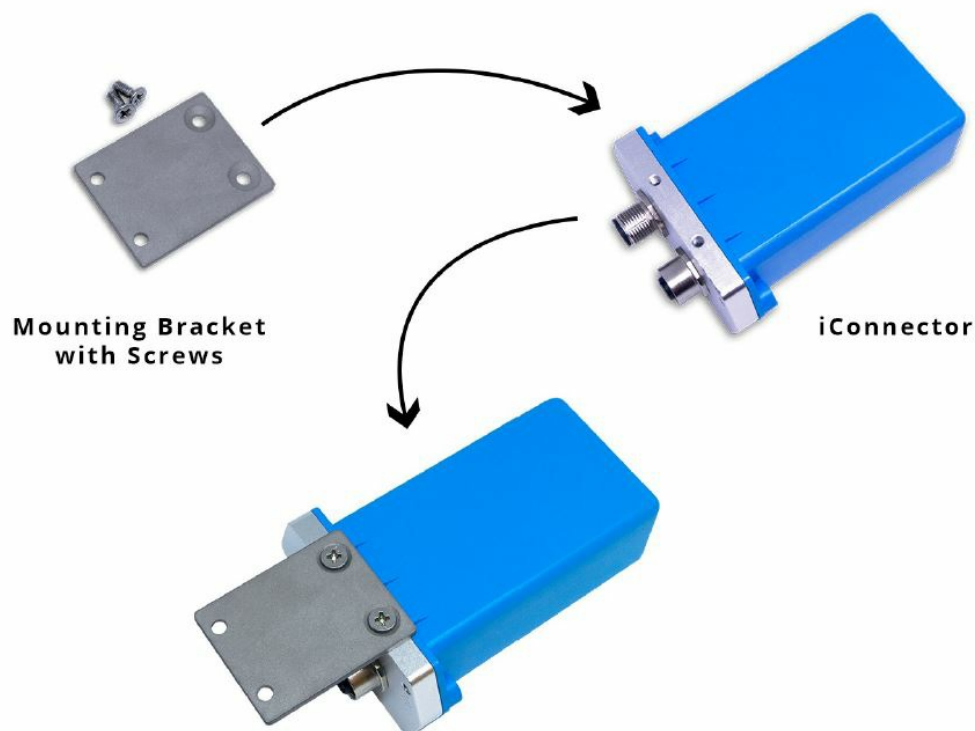


IO Wiring

Connect Power Supply and Modbus

- Connect PWR+ and PWR- to 7..48VDC power supply via M12 Male connector
- Connect A and B to RS485 connection.

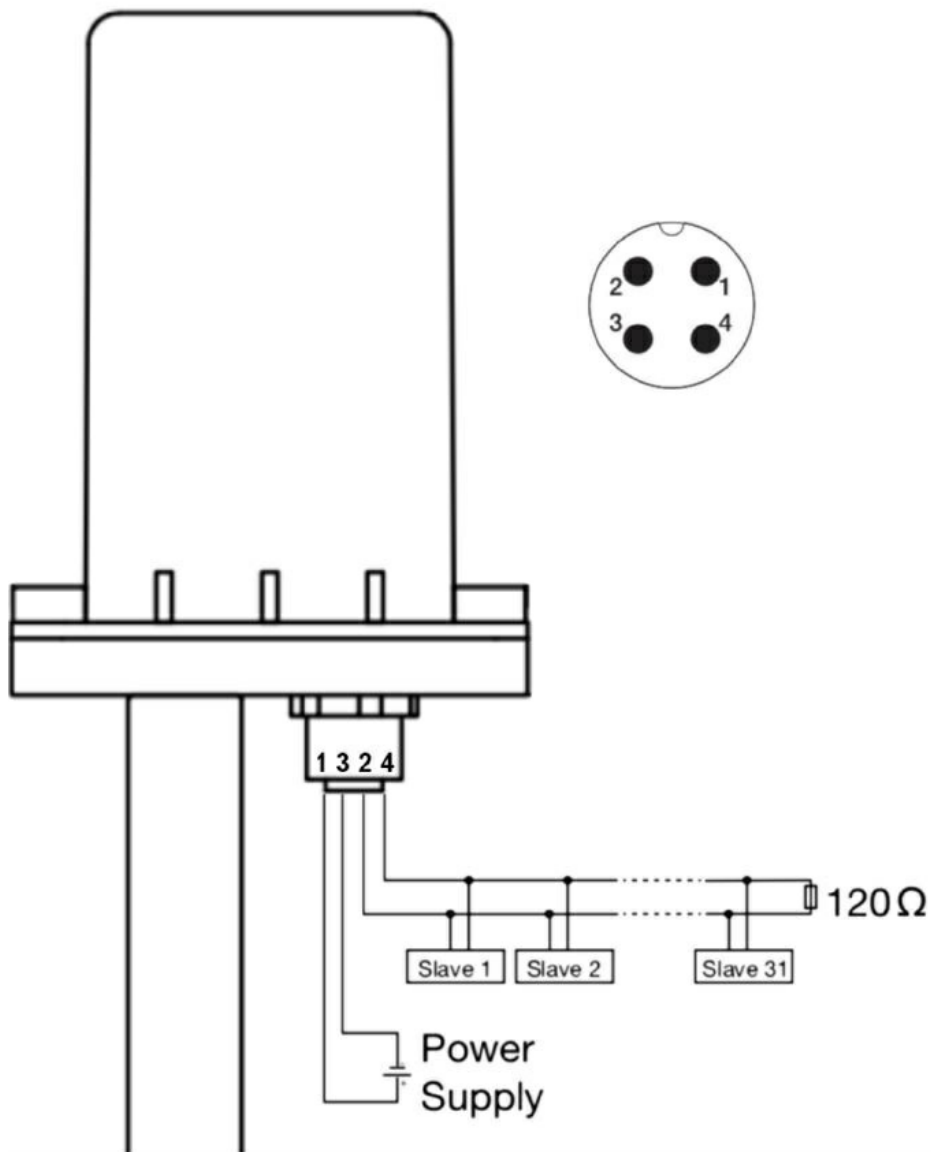


Use M12 female connection cable to connect to iConnector

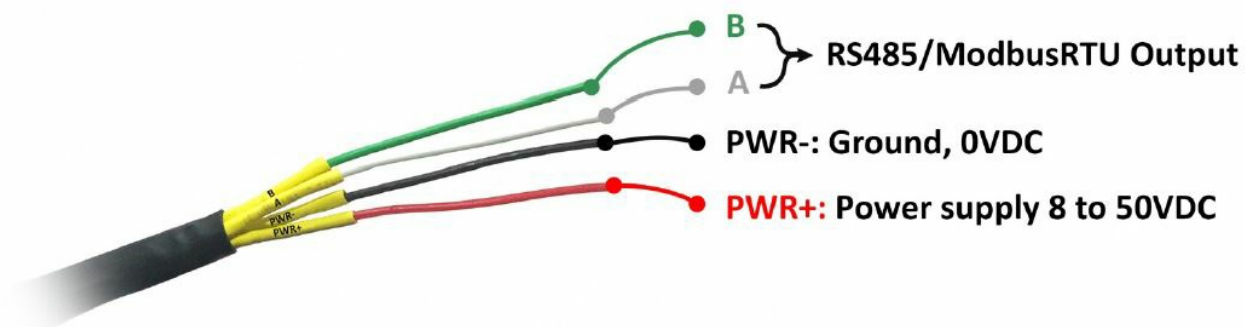


Example application

TYPICAL APPLICATION

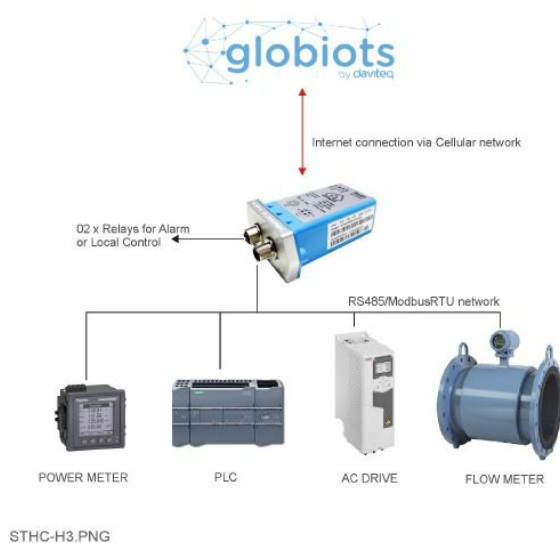

WIRELESS CONNECTION TO EQUIPMENTS

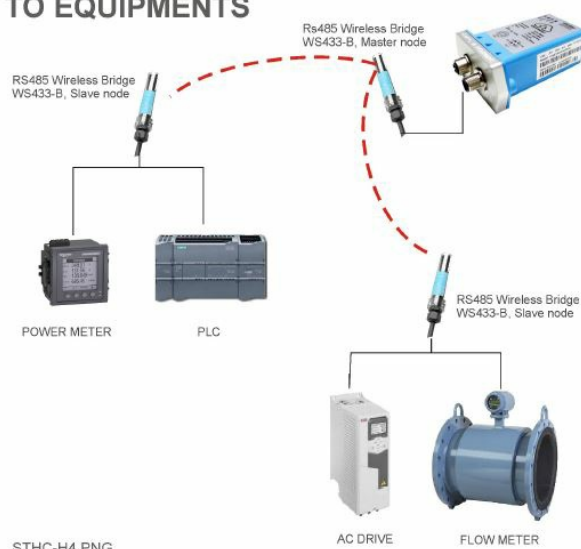

Troubleshooting

No.	Phenomena	Reason	Solutions
1	Data does not go to server, N/A	iConnector lost connection with server	<p>Check out the iConnector power supply</p> <p>Check the network coverage of the network in the area where iConnector is installed</p> <p>Check wifi configure, IP, gateway, internet.</p>
2	<p>Data sent to server is held Modbus error = 20</p> <p>Led modbus off</p>	<p>Loss of the modbus connection</p> <p>The configuration of parameter & modbus command is wrong</p>	<p>Check for modbus wiring</p> <p>Check the status of the modbus circuit of iConnector and Slaves</p> <p>Check the parameter & modbus command configuration on Cloud</p>

3	The data posted on Globiots is wrong, the phenomenon of value is changed abnormally continuously	Configuration parameter & modbus command is wrong	Check and correctly configure parameters & modbus commands
4	Led status of iconconnector not light Led status 4s flashes once (iConnector is only running on battery)	Lost power iConnector	Check iConnector power supply
5	Led network does not light	Not yet added iConnector to server or the information is wrong Sim has run out of data The device is out of range Sim is broken	Check out the information of iConnector add on server Check the network coverage of the network in the area where iConnector is installed

Support contacts

Manufacturer

Daviteq Technologies Inc

No.11 Street 2G,
Nam Hung Vuong Res.,
An Lac Ward,
Binh Tan Dist.,
Ho Chi Minh City,
Vietnam.

Tel: +84-28-6268.2523/4 (ext.122)

Email: info@daviteq.com

www.daviteq.com

Distributor in Australia and New Zealand

Templogger Pty Ltd

Tel: 1800 LOGGER


Email: contact@templogger.net

Revision #12















Created Tue, Dec 21, 2021 2:03 AM by Tien Nguyen

Updated Tue, Dec 21, 2021 6:22 AM by Tien Nguyen

Documents / Resources

	<p>Daviteq STHC-ISGWF-WS433-CL-04 iConnector WIFI [pdf] User Guide STHC-ISGWF-WS433-CL-04 iConnector WIFI, STHC-ISGWF-WS433-CL-04, iConnector WIFI, WIFI</p>
---	--

References

-  [Daviteq – Nhà sản xuất cảm biến đo lường và hệ thống IoT](#)
-  [daviteq.com/en/manuals/uploads/images/gallery/2020-03/CNulhUOo601Iyr3n-VIZUOWEB-MN-EN-SYMBOL-1.png](#)
-  [daviteq.com/en/manuals/uploads/images/gallery/2020-03/TJ8J3os24K8BYIru-STHC-ISG02DB-WS433-CL-04-H5.png](#)
-  [iConfig Mobile App for... | Online Product Manuals & Datasheets](#)
-  [daviteq.com/en/manuals/uploads/images/gallery/2020-06/1tNNET2vHkT8A7Qd-logo-01.png](#)
-  [daviteq.com/en/manuals/uploads/images/gallery/2020-07/pbdZG2liarCWhsXQ-STHC-B-H28.png](#)
-  [daviteq.com/en/manuals/uploads/images/gallery/2020-09/E7GSC1GT7WIJvzmO-STHC-H4.png](#)
-  [daviteq.com/en/manuals/uploads/images/gallery/2020-09/VTmL4YGHVdmTVyqL-STHC-H3.png](#)
-  [daviteq.com/en/manuals/uploads/images/gallery/2020-10/GwBdwQLdGLuIUXVa-STHC-ISGM1-NB1-2G-H6.png](#)
-  [daviteq.com/en/manuals/uploads/images/gallery/2020-10/HA7unBMBHF5nBo4L-STHC-ISGM1-NB1-2G-H7.png](#)
-  [daviteq.com/en/manuals/uploads/images/gallery/2021-12/4IKHHWn6yIPLpalb-image-1640061138739.png](#)
-  [daviteq.com/en/manuals/uploads/images/gallery/2021-12/djsFqA6DdeJoNhKj-image-1640062344465.png](#)
-  [daviteq.com/en/manuals/uploads/images/gallery/2021-12/KZYKCYPMtkneNMFz-image-1640060539615.png](#)
-  [daviteq.com/en/manuals/uploads/images/gallery/2021-12/o7H9mx9LgNe659Bd-image-](#)

[1640065868970.png](#)

- [!\[\]\(cd3e54d951a9fb854f48e4697cf550f9_img.jpg\) daviteq.com/en/manuals/uploads/images/gallery/2021-12/uP5GW7glry59P3Ro-image-1640063066852.png](#)
- [!\[\]\(cc729e263f29c0a76fbdc4cfe67fceb0_img.jpg\) daviteq.com/en/manuals/uploads/images/gallery/2021-12/xuo71lwTfAntidtk-image-1640059774266.png](#)
- [!\[\]\(90d36d418f8f7ab67431ba2525e00a5e_img.jpg\) Online Product Manuals & Datasheets](#)
- [!\[\]\(f70e40faeec369ff477dbaef549ee05b_img.jpg\) Templogger Pro - Login](#)

Manuals+