




DEKO LIGHT 840412 Flexible LED Stripe Instructions

[Home](#) » [DEKO LIGHT](#) » DEKO LIGHT 840412 Flexible LED Stripe Instructions 



Product-Notes
Flexible LED stripe, COB-Sauna-24V-3000 K-5m-Silicone
Article No.: 840412

Dear customer,

thank you for deciding to purchase our product. The product fulfils the requirements of effective European and national guidelines. To maintain the condition of the product and to ensure safe operation, you -as the user -must observe the product notes and the operation manual! They contain important information for the start-up and handling. It is important, therefore, that these documents are archived carefully for referring to information at a later stage.

Contents

- [1 Safety Instructions](#)
- [2 Proper Use](#)
- [3 Care](#)
- [4 Faulty Function](#)
- [5 Changing Lamps](#)
- [6 Storage and Disposal](#)
- [7 Mounting Instruction](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)

Safety Instructions

We are not responsible for any property damage or personal injury caused by failure to observe these product notes and manual, improper handling or unauthorised modifications.

It can only be installed by a qualified electrician.

Make sure that the item has not been damaged during transport before putting the light into operation. It may not be operated if there are any damages to electrical parts.

It may only be operated once removed from the packaging.

The type plate must not be removed.

The connection lines in the building must be disconnected before installation and secured against being switched back on.

Make sure the electrical specifications for the connection lines correspond with the specifications given on the nameplate of this product.

Please take care during installing for the correct polarity (V+, V-) and do also use the right power supplies with the following safety measures: SELV = Safety Extra Low Voltage, overload protection and short-circuit protection.

Make sure that the cables and plugs are not subject to tension or torsional forces and do not bend the cables.

Protect all cables and insulation against possible damages.

Output lines should be laid separately and spaced apart from other lines. The power supply cables and the lamp feeders must not cross each other.

The cable lengths may be max. 2 m between power supply and lamp. In addition, the radio interference suppression is not guaranteed and it comes through strong inductive coupling with the power line brownouts.

Do not allow the product to come into contact with extreme heat or naked flames.

Use the supplied fastening material only when it is suited for the installation background.

The product must not be covered with objects (decorations) or thermally insulating coverings /similar materials.

Before disposal of the packaging material make sure that all components are removed.

Keep packaging material away from the reach of children and pets. The packaging contains small parts that may be swallowed by children.

Don't run the stripe when it is on the role.

You can cut the LED stripe with a cutter at the marked cutting points on the stripe. An extension is not possible.

Mounting on an aluminum profile is recommended in order to optimize the heat dissipation.

Be careful when you install on conducting surfaces, because the solder contact can cause a short circuit.

Avoid buckling the stripe because the PCB board can be damaged.

Proper Use

This product is only intended for lighting purposes and may only be operated on normal or non-flammable surfaces.

The use can be done in indoor/outdoor areas.

Make sure that the surface is suitable for permanently and reliably taking the weight of the light.

Care

Repairs may only be carried out by a qualified electrician.

Disconnect the entire product from the mains first and allow it to cool down before cleaning or maintaining.

Use a dry or slightly moistened cloth for cleaning.

Never use any chemicals, flammable cleaning agents or abrasives. These may cause damage to the surface coating and/or the insulators.

Faulty Function

Light switched on at the switch?

Transformer mounted and connected properly?

If available; remote control intact? Check the batteries.

Check the connected lines.

Lamp defective?

Changing Lamps

The light source of this lamp is not replaceable. When the light source has reached its end of life, replace the entire luminaire.

Storage and Disposal

Used electronic devices must be brought back to public collection points and must not be disposed of as household waste.

Storage in a dry and clean environment. Do not strain the product mechanically during storage.

Mounting Instruction

Article No.: 840409 / 840410 / 840411 / 840412

COB Sauna Stripe

Instructions for mounting and safety

The product must not be connected to the supply voltage when it is in the package or rolled up on a reel.

The product must not be installed on metallic or heat-conducting surfaces from an ambient temperature of 45°C. (e.g. aluminum profile)

The product is not compatible with the products of another manufacturer.

For connection use suitable connectors.

Open ends must be isolated before use.

The stripe may only be used at the marked markings get cut. See also the attached data sheet.

The product must be mounted using the supplied silicone mounting brackets or the separately available plastic profile.

930739 Accessory brackets

930740 Accessory profile

930741 Accessory profile

electrical connection

Attention

For this work you must disconnect the power supply and secure it from being switched on again.


Only the separately available accessories may be used for the connection/extension/power supply:

930736 Accessory end cap

930737 Accessory feed

930738 Accessory connector

Bracket mounting

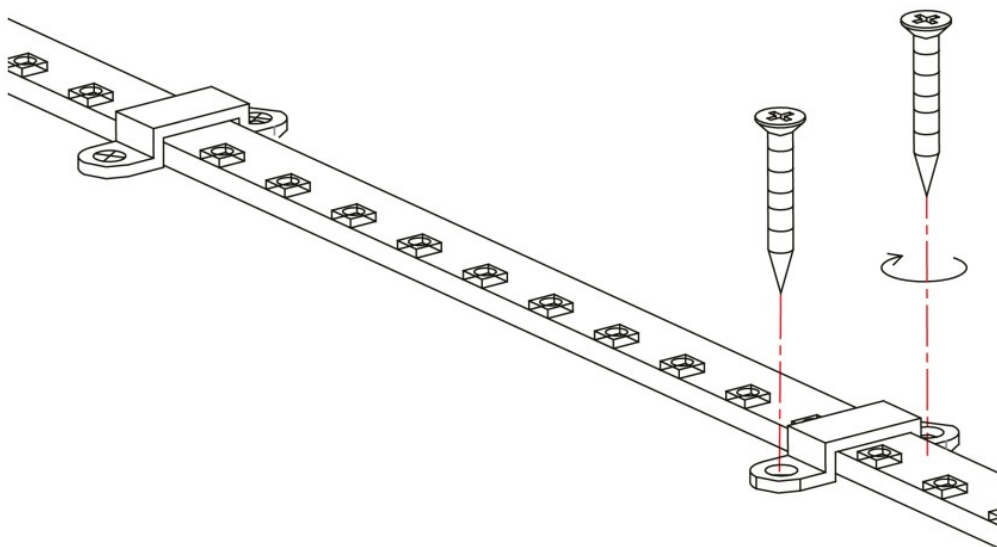


included in the delivery:

10 silicon holders

20 screws

2 endcaps

Bending Radius

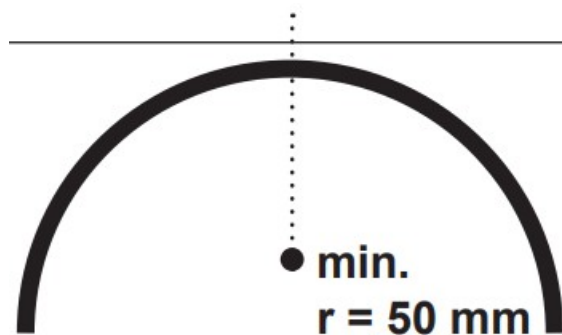

Deko-Light Elektronik-Vertriebs GmbH


www.deko-light.com / deko@deko-light.com

Technical Data can be changed without advance notice.

Errors excepted.

13.07.2023

Documents / Resources

	DEKO LIGHT 840412 Flexible LED Stripe [pdf] Instructions 840412 Flexible LED Stripe, 840412, Flexible LED Stripe, LED Stripe, Stripe
---	---

References

- light.com
- [Deko-Light | Spezialist für LED Beleuchtung](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.