



**NVR4216-EI 16  
Channels Wizensense  
Dahua**



# DELTA NVR4216-EI 16 Channels Wizensense Dahua User Manual

[Home](#) » [Delta](#) » DELTA NVR4216-EI 16 Channels Wizensense Dahua User Manual 

## Contents

- [1 DELTA NVR4216-EI 16 Channels Wizensense Dahua](#)
- [2 Safety measures](#)
- [3 Proper product disposal](#)
- [4 Front panel](#)
- [5 Rear panel](#)
- [6 CONTACT](#)
- [7 Documents / Resources](#)
  - [7.1 References](#)
- [8 Related Posts](#)



## DELTA NVR4216-EI 16 Channels Wizensense Dahua



## Safety measures

Particular attention at designing was directed to the quality standards of the device where ensuring the safety of

operation is the most important factor. The device must be secured against contact with caustic, staining and viscous fluids. The device was designed in such a way that it restarts operation when the power supply is restored after a break.

**Attention!** We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by passing the voltages higher than specified in the manual are not under warranty. Turn off the device before transporting it. Prior to connecting the device to a power source check whether the supplied voltage is consistent with the rated voltage specified in the user manual.

## Proper product disposal

A marking of a crossed-out waste bin indicates that the product may not be disposed of together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources. To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally friendly way.

NVR equipped with advanced functions of intelligent image analysis.



Standard:	TCP/IP
Supported resolutions:	max. 16 Mpx – 4608 x 3472 px
Video outputs:	1 pcs HDMI 4K 1 pcs VGA
Audio support:	<ul style="list-style-type: none"><li>• 16 Channels – Audio from cameras</li><li>• Bi-directional audio streaming support</li></ul>
Audio inputs:	1 pcs CINCH
Audio outputs:	1 pcs CINCH
Image compression method:	Smart H.265+ / H.265 / Smart H.264+ / H.264 / MJPEG
Bitrate:	max. 256 Mbps

Supported hard drives:	2 x 16 TB SATA
Recording modes:	Manual, Sensor, Motion detection, Schedule
External storage devices backup:	Backup to USB drive (pendrive, external drive)
Searching and playback the records:	<ul style="list-style-type: none"> <li>Records searching: by time and events type. Records playback: forward, backward, fast, slow</li> <li>Advanced searching (to the one-second accuracy)</li> <li>Smart Playback function</li> <li>Records playback from max. 16 channels in the same time @ 1080p (without AI)</li> <li>Records playback from max. 12 channels in the same time @ 1080p (AI)</li> </ul>
Network interface:	1 x RJ-45 10/100/1000 Base-TX
Network functions:	Full support via network, Remote records copying, Web-Server built-in
Network protocols:	<p>HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, SNMP, UDP, SMTP, NTP, DHCP, DNS, IP</p> <p>Filter, PPPoE, DDNS, FTP, Alarm Server, IP Search, P2P, Auto Register</p>
ONVIF:	22.06
Default IP address:	192.168.1.108
Default admin user/password:	<p>admin / –</p> <p>The administrator password should be set at the first start</p>
Mobile phones support:	<p>Port no.: 37777 or access by a cloud (P2P)</p> <ul style="list-style-type: none"> <li>Android: Free application <a href="#">DMSS</a></li> <li>iOS (iPhone): Free application <a href="#">DMSS</a></li> </ul> <p>See how to configure the P2P function in Dahua recorders and how to enable the mobile application</p>

Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
RTSP URL:	<ul style="list-style-type: none"> <li>• rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&amp;subtype=0 – Main stream</li> <li>• rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&amp;subtype=1 – Sub stream</li> </ul>
USB:	2 pcs USB 2.0
Serial ports:	

Alarm inputs/outputs:	4 / 2
PTZ control:	IP Speed Dome Cameras
Motion Detection:	
Intelligent image analysis:	

Main features:	<ul style="list-style-type: none"> <li>• Intelligent image analysis: crossing the line (tripwire), intrusion, scene change, face detection</li> <li>• SMD PLUS – searching for an object classified as human, motor vehicle</li> <li>• Filtering of false alarms based on the recognition of persons and vehicles</li> <li>• Quick Pick – AI technology enabling, together with the recorder, quick identification of interesting objects (people/vehicles) based on an artificial intelligence algorithm. It allows to extract and compare the colors of clothes and vehicles</li> <li>• Face recognition</li> <li>• Face analysis: determination of sex, age, and characteristic elements of appearance (glasses, facial hair, mask)</li> <li>• Support for up to 10 face databases, including 20,000 face images</li> <li>• In the base other than face photography, can also be stored such information as: name, sex, date of birth, nationality, address, ID number</li> <li>• Intelligent face search by metadata of different targets or uploading pictures of faces to the device and comparing them with recorded faces by similarity</li> <li>• Privacy zones</li> </ul> <p>Functions implemented in cooperation between the recorder and cameras that support these functions :</p> <ul style="list-style-type: none"> <li>• ANPR</li> <li>• people counting</li> <li>• heat map</li> </ul>
Mouse support:	
IR remote controller in the set:	
Power supply:	12 V DC / 4 A (power adapter included)
Power consumption:	max. 10 W (without HDD)

Operation temp:	-10 °C ... 55 °C
Weight:	1.5 kg
Dimensions:	375 x 284 x 53 mm
Supported languages:	Polish, English, Bulgarian, Czech, Finnish, Greek, Romanian, Serbian, Slovenian, Hungarian
Manufacturer / Brand:	DAHUA
Guarantee:	<b>3 years</b>

### Front panel




### Rear panel



### In the kit



### Example captures of device interface

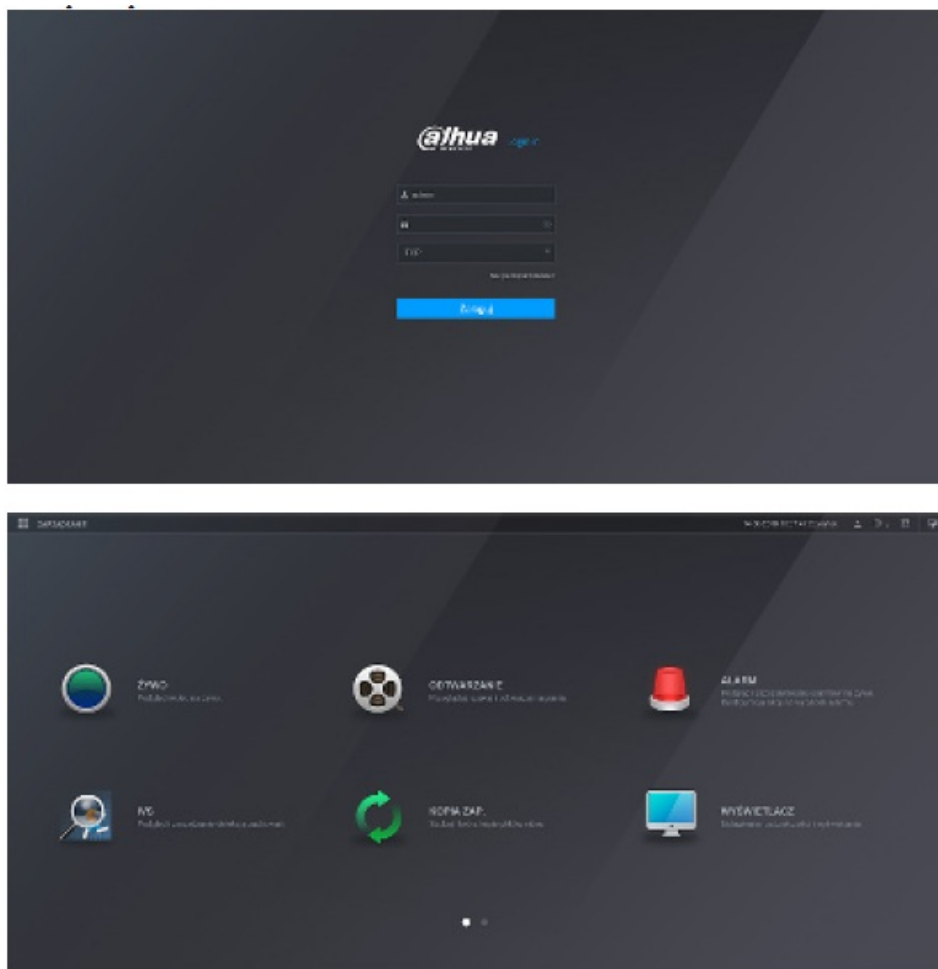

### Warning!

Please read the user manual included in this work as it contains important information related to the safety of installation and use of the device. Only persons who read the user manual may use the device. The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual. The device must be unpacked prior to starting up. After removing the packaging make sure the device is in working order. If the product has defects, it should not be used until it is repaired. The product is intended for use at home and commercial use and may not be used for other than intended use. The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend following the aforementioned safety rules for the operation and maintenance of the device. In this way, you will ensure yourself safety and avoid causing damage to the device. The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from the use of the product or other products related to it – indirect, incidental, or consequential loss or damage. The above provisions apply whether the loss or damage concerns:


1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity;
2. Improper results of operation of the product or products related to it;
3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee, and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

### CONTACT

- DELTA-OPTI Monika Matysiak;

- <https://www.delta.poznan.pl> POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl);
- tel: +(48) 61 864 69 60

## Documents / Resources

	<p><a href="#">DELTA NVR4216-EI 16 Channels Wzsense Dahua</a> [pdf] User Manual NVR4216-EI 16 Channels Wzsense Dahua, NVR4216-EI, 16 Channels Wzsense Dahua, Wzsense Dahua, Dahua</p>
---	---

## References

- [User Manual](#)

### Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.