



DIGILENT PmodAD2 Analog-to-Digital Converter User Manual


[Home](#) » [DIGILENT](#) » DIGILENT PmodAD2 Analog-to-Digital Converter User Manual 

Contents


- [1 DIGILENT PmodAD2 Analog-to-Digital Converter](#)
- [2 Overview](#)
- [3 Functional Description](#)
- [4 Interfacing with the Pmod](#)
- [5 Physical Dimensions](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)



DIGILENT PmodAD2 Analog-to-Digital Converter

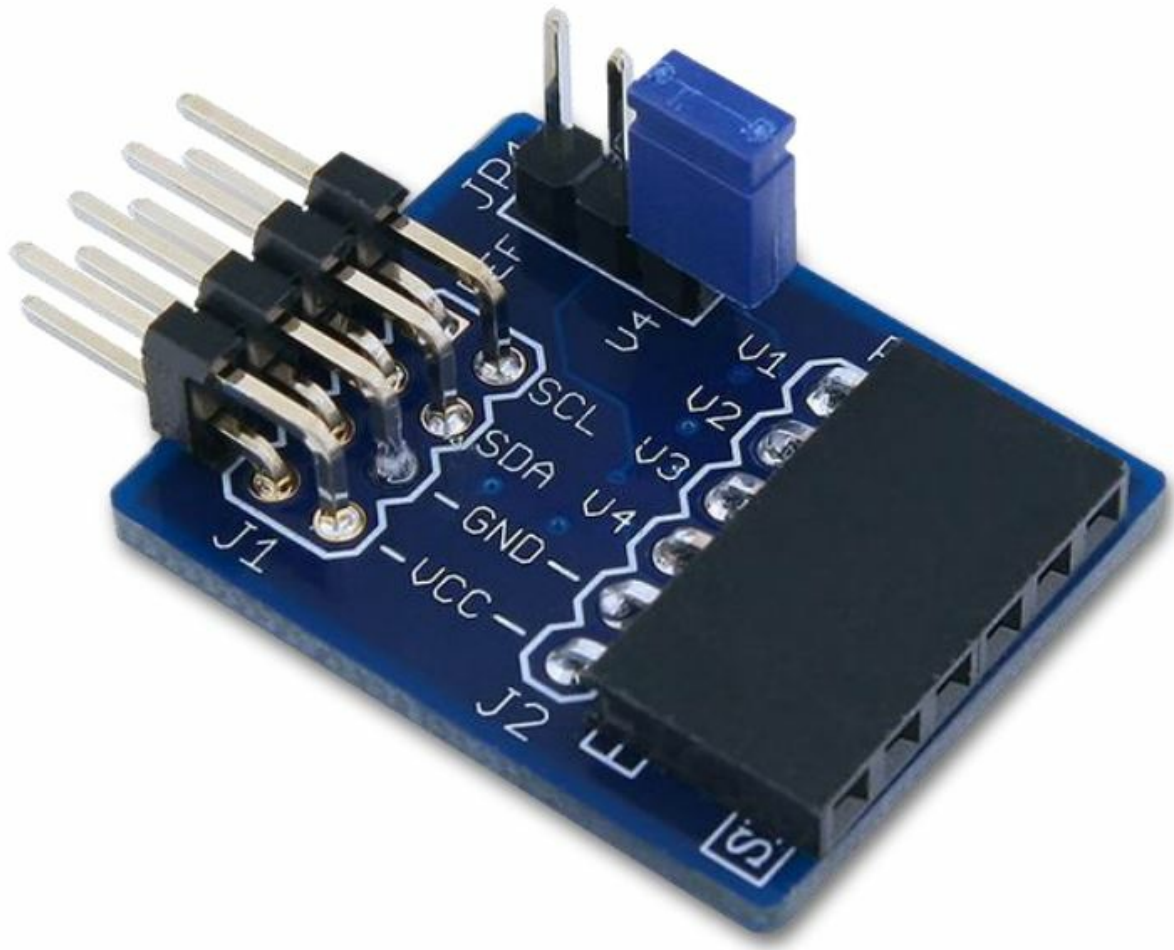

Overview

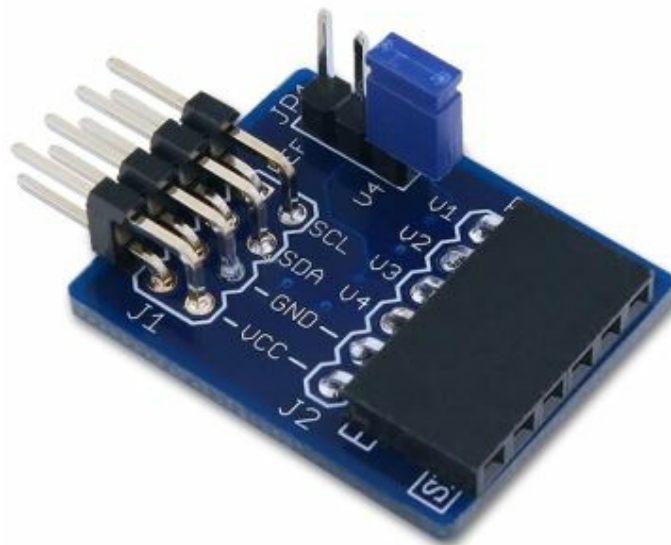

The PmodAD2.

The PmodAD2 is an analog-to-digital converter powered by the Analog Devices AD7991. Users may communicate with the board through I2C to configure up to 4 conversion channels at 12 bits of resolution.

Features include

- Up to four 12-bit analog to digital converter channels

- On-board 2.048 V voltage reference
- Jumper selectable reference input
- Small PCB size for flexible designs (1.0 in × 0.8 in)(2.5 cm × 2.0 cm)
- Follows Digilent Interface Specification
- Library and example code available in resource center

Functional Description

- The PmodAD2 utilizes Analog Devices® AD7991 to provide up to four channels of 12-bit analog-to-digital conversion.

Interfacing with the Pmod

- The PmodAD2 communicates with the host board via the I²C protocol. System boards are able to call the Pmod by sending out the device address of 0b0101000 followed by the appropriate read or write bit. If a write bit is chosen, users may then configure the on-board chip to only use certain channels or may immediately start reading the 12 bits of data from the 16-bit data register if the read bit is sent.
- Unlike other devices that use I²C, no addresses are associated with these two registers; only the read/write bit at the end of the slave address distinguishes between the two registers. By default, all four channels have analog-to-digital conversions performed on them sequentially with the supply voltage VCC acting as the voltage reference for the ADC.
- After each conversion is performed, the device places itself into power-down mode. Upon a read command, the device will wake itself up and prepare for a conversion, which takes approximately 0.6 μs. The actual conversion process takes approximately 1.0 μs.

Table 1. Pinout description table.

Pin	Signal	Description
1 & 5	SCL	Serial Clock
2 & 6	SDA	Serial Data
3 & 7	GND	Power Supply Ground
4 & 8	VCC	Power Supply (3.3V/5V)

- Any external power applied to the PmodAD2 must be within 2.7V and 5.5V; however, it is recommended that the Pmod is operated at 3.3V.

Physical Dimensions

- The pins on the pin header are spaced 100 mil apart. The PCB is 1 inch long on the sides parallel to the pins on the pin header and 0.8 inches long on the sides perpendicular to the pin header.

Contact

- 1300 Henley Court
- Pullman, WA 99163
- 509.334.6306
- www.digilentinc.com

Copyright Digilent, Inc. All rights reserved.

Other product and company names mentioned may be trademarks of their respective owners.

Documents / Resources

	<p>DIGILENT PmodAD2 Analog-to-Digital Converter [pdf] User Manual rev. A, PmodAD2 Analog-to-Digital Converter, PmodAD2, Analog-to-Digital Converter, Converter</p>
-----------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

References

-  [Digilent â€œ Start Smart, Build Brilliant.](#)