

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [GRIFEMA](#) /

› [GRIFEMA LYON-G14001G Professional Kitchen Faucet User Manual](#)

GRIFEMA G14001G

GRIFEMA LYON-G14001G Professional Kitchen Faucet User Manual

Model: G14001G

INTRODUCTION

Welcome and thank you for choosing the GRIFEMA LYON-G14001G Professional Kitchen Faucet. This manual provides essential information for the proper installation, operation, maintenance, and troubleshooting of your new faucet. Please read these instructions carefully before installation and retain them for future reference.



This image shows the GRIFEMA LYON-G14001G Professional Kitchen Faucet in its rose gold finish, featuring its distinctive high arc and pull-out spray head.


INSTALLATION INSTRUCTIONS

Before you begin, ensure you have all necessary tools and components. This faucet is designed for easy installation in 1 or 3-hole configurations.

Components Included

- 1 x Professional Kitchen Faucet
- 1 x Mixer Tap Washer Kit

- 2 x 40 cm Hoses

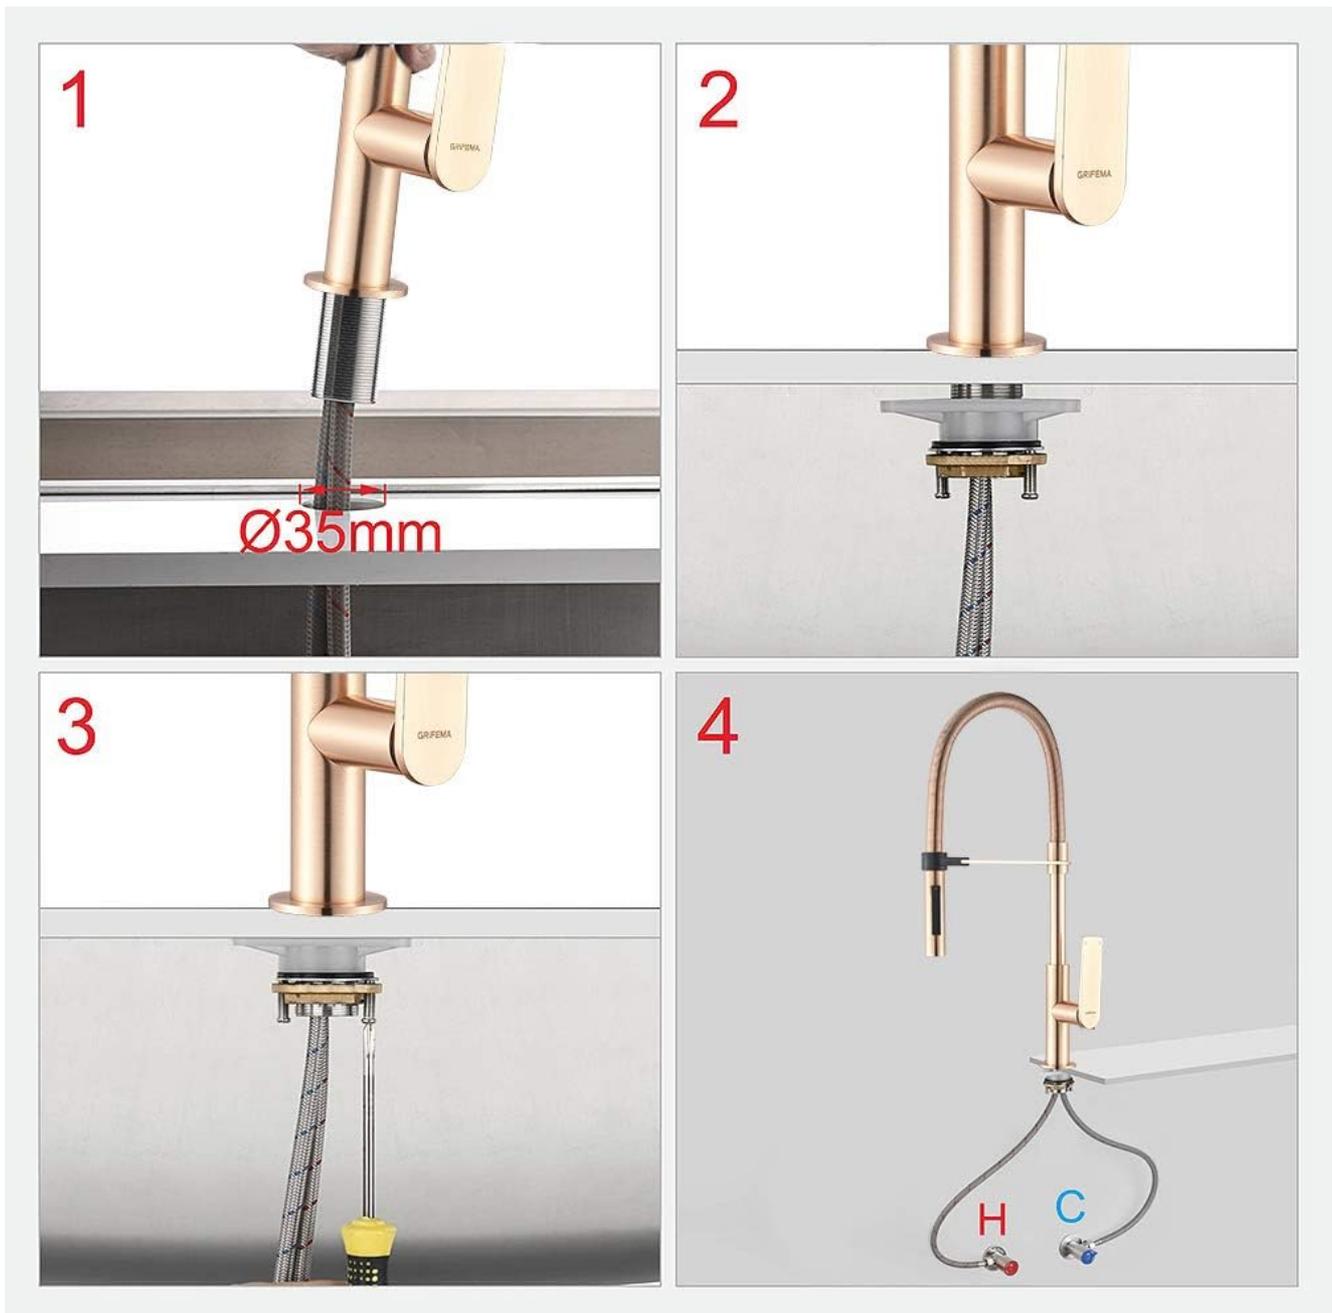

This image displays all components included with your GRIFEMA LYON-G14001G faucet, including the main faucet body, connection hoses, and installation hardware.

Step-by-Step Installation

1. **Prepare the Mounting Hole:** Ensure your sink or countertop has a standard $\text{\O}35\text{mm}$ hole.
2. **Secure the Faucet:** Insert the faucet into the mounting hole. From underneath the sink, secure it with the provided washer and nut.
3. **Connect Water Lines:** Attach the hot (H) and cold (C) water supply hoses to the corresponding inlets on the faucet and your home's water supply. Ensure all connections are tight to prevent leaks.
4. **Install Pull-Out Hose:** Connect the pull-out spray hose to the faucet's main body and attach the counterweight to the hose for smooth retraction.



This image illustrates the four main steps for installing the GRIFEMA LYON-G14001G kitchen faucet, from securing it to the sink to connecting the water lines.

Important: This faucet is suitable only for high-pressure water systems.

OPERATION

Water Flow and Temperature Control

The single lever handle controls both water flow and temperature.

- **Flow Control:** Lift the handle to increase water flow; lower it to decrease.
- **Temperature Control:** Move the handle left for hot water and right for cold water.

Pull-Out Spray Function

Your faucet features a convenient pull-out spray head for enhanced flexibility.



This image demonstrates the GRIFEMA LYON-G14001G faucet's pull-out spray head and its two distinct spray modes: a powerful laminar spray and a massage shower spray.

The spray head offers two modes:

- **Laminar Spray:** Provides a powerful, targeted stream for filling pots.
- **Massage Shower Spray:** Delivers a wider, softer spray for rinsing.
- To switch between modes, press the button located on the spray head.

360° Swivel Spout

The faucet spout can swivel 360 degrees, providing full sink coverage and flexibility for various kitchen tasks.



This image highlights the 360-degree swivel capability of the GRIFEMA LYON-G14001G faucet, allowing for versatile use across the sink area.

CARE AND MAINTENANCE

Regular cleaning and proper maintenance will ensure the longevity and optimal performance of your GRIFEMA faucet.

Cleaning the Faucet

- Use a soft cloth and mild soap or a non-abrasive cleaner specifically designed for kitchen fixtures.
- Avoid abrasive cleaners, scouring pads, or harsh chemicals, as these can damage the finish.
- Rinse thoroughly with water after cleaning and dry with a soft cloth to prevent water spots.

Aerator Maintenance

The faucet is equipped with a water-saving NEOPERL® aerator. Periodically unscrew the aerator from the spray head and clean any mineral deposits or debris to maintain optimal water flow.



This image shows the NEOPERL® water-saving aerator integrated into the GRIFEMA LYON-G14001G faucet's spray head, indicating its easy accessibility for maintenance.

Ceramic Cartridge

Your faucet features a high-quality ceramic cartridge designed for durability and tested for up to 500,000 cycles, ensuring a long service life.



This image displays the durable ceramic cartridge and the high-quality brass material used in the construction of the GRIFEMA LYON-G14001G faucet, highlighting its robust internal components.

TROUBLESHOOTING GUIDE

This section addresses common issues you might encounter with your faucet.

Low Water Pressure

- **Check Aerator:** Mineral deposits can clog the aerator. Remove and clean it as described in the Maintenance section.
- **Check Water Supply:** Ensure both hot and cold water supply valves are fully open.
- **Verify System Pressure:** This faucet requires a high-pressure system. If your home has low water pressure, consult a plumber.

Leaks

- **Check Connections:** Ensure all water supply line connections under the sink are tight. Do not overtighten.
- **Inspect Hoses:** Check for any visible damage or kinks in the supply hoses.
- **Cartridge Issues:** If leaks persist from the handle or spout, the ceramic cartridge may need inspection or

replacement. Contact customer support.

Spray Function Malfunction

- **Button Responsiveness:** If the spray mode button on the pull-out head is unresponsive, check for debris or mineral buildup.
- **Hose Kinks:** Ensure the pull-out hose is not kinked or obstructed under the sink, which can affect water flow to the spray head.
- **Internal Mechanism:** If the issue persists, the internal mechanism of the spray head may be faulty. Contact customer support for assistance.

PRODUCT SPECIFICATIONS

The following table details the technical specifications of the GRIFEMA LYON-G14001G Professional Kitchen Faucet.



This image provides a detailed diagram of the GRIFEMA LYON-G14001G faucet, showing its key dimensions including height (21.3" / 540mm), spout reach (10.1" / 257mm), and spout height (6.3" / 160mm).

Feature	Detail
Model Number	G14001G
Brand	GRIFEMA
Dimensions (L x W x H)	7.5 x 30 x 68 cm (Product); 3.27 kg
Color	Rose Gold
Style	Mixer
Finish	Chrome / Rose Gold
Material	Brass, Acrylonitrile Butadiene Styrene
Installation Method	Deck Mounted
Number of Holes	1
Number of Handles	1
Hose Length	40 cm
Special Features	Easy to Install
Recommended Use	Kitchen
Country of Origin	Spain

WARRANTY AND CUSTOMER SUPPORT

Warranty Information

GRIFEMA products are backed by a 12-month exchange policy, ensuring a risk-free experience. This is in addition to Amazon's 30-day refund policy.

Customer Support

For any questions, technical assistance, or warranty claims, please contact GRIFEMA customer service. Our team is located in Barcelona, Spain, and is dedicated to providing reliable support.

- Refer to your purchase documentation for specific contact details.
- When contacting support, please have your model number (G14001G) and purchase date available.