



DOMUS Lighting CHAM-REM-1C Bluetooth Remote Control Installation Guide

[Home](#) » [DOMUS LIGHTING](#) » DOMUS Lighting CHAM-REM-1C Bluetooth Remote Control Installation Guide 

DOMUS Lighting CHAM-REM-1C Bluetooth Remote Control



Contents

- [1 Thank you](#)
- [2 Specifications](#)
- [3 Pair with RF+Bluetooth receiver](#)
- [4 How to save and recall scenes](#)
- [5 Recall the Saved Scenes](#)
- [6 Customer Support](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)

Thank you

Thank you for purchasing your new CHAM-REM-1C Remote control, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty

Specifications

Type of controller:	Single colour dimming remote control	Remote size (mm):	(L) 150mm x (W) 38.6mm x (D) 12mm
Protocol:	RF + Bluetooth	Transmission frequency:	2.4GHz
Dimming range:	0.1% – 100%	Transmission range:	30m
Remote colour:	Black	Operation voltage:	3VDC (CR2025)

- RF+Bluetooth DIM Remote Control
- Single color remote control to control 3 zones of receivers and 4 scenes
- Easy & quick pairing to the RF+Bluetooth receivers by simply pushing the buttons
- Mesh network for further control distance, receivers can transmit signal to each other
- Each remote can control numerous receivers
- Each receiver can be paired to max. 8 remote controls
- The controlled receiver status can be quickly synchronized to the smart APP
- Transmission range between every two neighbor devices up to 30m
- • Bluetooth low power consumption technology, long battery life
- With magnet on the back, easy fasten to & remove from the bracket

Safety & Warnings

- This device contains a button lithium battery that shall be stored and disposed properly.
- DO NOT expose the device to moisture

Pair with RF+Bluetooth receiver

Step 1: Do wiring the receiver according to wiring diagram (please refer to the instruction of RF receiver that you would like to pair with).

Step 2: Click the “Prog. Key” or “Reset” button on RF+Bluetooth receiver (or reset power of the receiver 3 times continuously if the button is not accessible) to set it into pairing to RF remote status


Step 3: Choose one zone and click “I” or “O” of the zone (e.g. zone 2), LED lights connected with the receiver flicker once means the receiver is paired with zone 2 successfully.

Note: one receiver can be paired with max 8 remote controls.

If you use multiple receivers, you have two choices:

Option 1: have all the receivers in the same zone, like zone 1

Option 2: have all the receivers in different zones, like zone 1, zone 2, zone 3

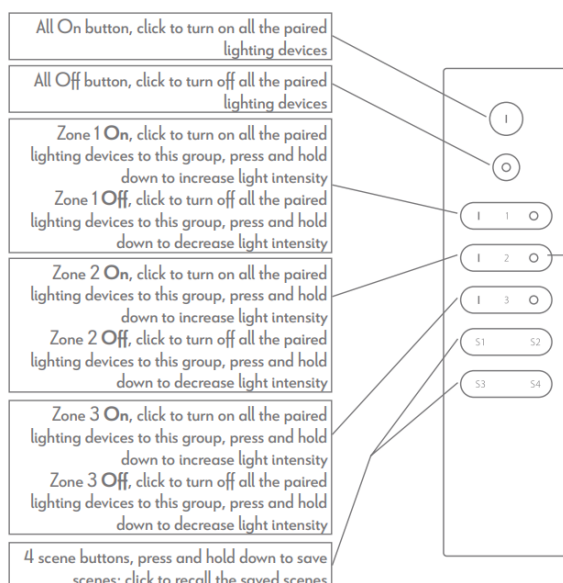

Pair with RF+Bluetooth receiver

Step 1: Do wiring the receiver according to wiring diagram (please refer to the instruction of RF receiver that you would like to pair with).



Step 2: Click the “Prog. Key” or “Reset” button on RF+Bluetooth receiver (or reset power of the receiver 3 times continuously if the button is not accessible) to set it into pairing to RF remote status

Step 3: Choose one zone and click “I” or “O” of the zone (e.g. zone 2), LED lights connected with the receiver flicker once means the receiver is paired with zone 2 successfully.

Note: one receiver can be paired with max 8 remote controls.

If you use multiple receivers, you have two choices:

Option 1: have all the receivers in the same zone, like zone 1

Option 2: have all the receivers in different zones, like zone 1, zone 2, zone 3

Note:

- The lamp must be installed by professional electrician
- Ensure the power supply is switched off before fitting this product
- Do not touch the lamp when in use
- Keep away from hot steam and corrosive gas


How to save and recall scenes

Step 1: Make sure that lighting devices have already been paired to the 3 groups that you would like to save scenes for.

Step 2: Press and hold “I” or “O” button of the 3 groups to adjust a desired brightness for each individual group.

Step 3: Press and hold down a scene button (e.g. S1) until LED lights blink to save the brightness for each individual group at the same time.

Step 4: Repeat above 3 steps, and adjust another brightness for each individual group, then press and hold the another scene button (e.g. S2) to save the brightness for each individual group at the same time. Totally 4 scenes can be saved for each individual group.

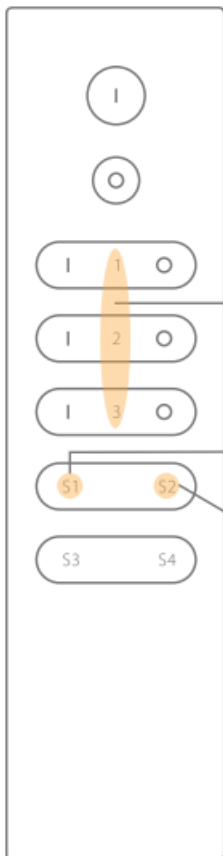

Step 1: Make sure that lighting devices have already been paired to the 3 groups that you would like to save scenes for.

Step 2: Press and hold “I” or “O” button of the 3 groups to adjust a desired brightness for each individual group.

Step 3: Press and hold down a scene button (e.g. S1) until LED lights blink to save the brightness for each individual group at the same time.

Step 4: Repeat above 3 steps, and adjust another brightness for each individual group, then press and hold the another scene button (e.g. S2) to save the brightness for each individual group at the same time. Totally 4 scenes can be saved for each individual group.

Recall the Saved Scenes

Step 1: Short press button S1/S2/S3/S4 to recall a saved scene for each individual group at the same time.

Customer Support


29-31 Richland St. Kingsgrove. Sydney NSW 2208 Australia

Phone: 02 9554 9600 | Fax: 02 9554 9433

enquiries@domuslighting.com.au | www.domuslighting.com.au



Documents / Resources

	<p>DOMUS Lighting CHAM-REM-1C Bluetooth Remote Control [pdf] Installation Guide 20143, CHAM-REM-1C, CHAM-REM-1C Bluetooth Remote Control, Bluetooth Remote Control, Remote Control, Control</p>
---	---

References

[Manuals+.](#)