



Dongguan Jizhi Electronic Technology GK68S USB+ Bluetooth 2 Mode Keyboard Instructions

[Home](#) » [Dongguan Jizhi Electronic Technology](#) » Dongguan Jizhi Electronic Technology GK68S USB+ Bluetooth 2 Mode Keyboard Instructions 

Contents


- [1 Dongguan Jizhi Electronic Technology GK68S USB+ Bluetooth 2 Mode Keyboard](#)
- [2 Overview](#)
- [3 FN Function Description](#)
- [4 Documents / Resources](#)
- [5 Related Posts](#)



Dongguan Jizhi Electronic Technology GK68S USB+ Bluetooth 2 Mode Keyboard



Overview

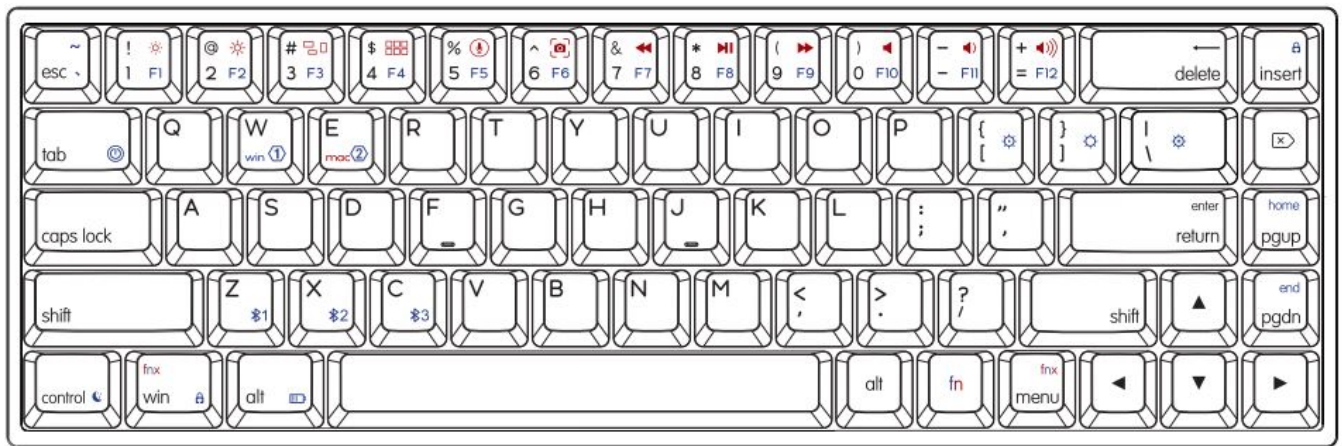

fn tips: Unlock/Lock the WIN key, prevent windows start pop-ups in the game.



fn tips: fn+space ON/OFF the BT mode, link to USB mode.

Bluetooth condition: Z, X, C one of blue led is flashing, the keyboard is connecting the BT equipment.

fn tips: If you are not sure which mode the keyboard is in now, press fn key and observe what LED is on to confirm.

fn/fnx tips:

The default fn function is not so good? Set your own fnx Function

For example, in the Win mode: fn + 7 = F7, fnx + 7 = ⏪

fn + 8 = F8, fnx + 8 = ⏩

fn + 9 = F9, fnx + 9 = ⏴

.....

FN Function Description

Define mode

| Key | Function |
|---------------------------------------|---|
| Standard mode | Standard mode, all buttons can not be user-defined. User can customize your own personality keyboard by the following 4 modes. On-board mode 1/2/3 is strongly recommended. (Note: In the custom mode, except FN key, other keys can be redefined key values, some of the FN + "x" function can be also modified, except the backlight, Bluetooth and system control. The FN button can not be moved, but user can define your own FNX at any key in the custom mode. |
| FN + W Onboard mode1 WIN mode | ① FN + W, onboard mode layer 1, "W" lights white LED, no need to run and connect the driver. The keyboard works in the custom key functions and user can modify the key functions and macro settings by the driver and these settings can be downloaded and saved to the keyboard. The reference setting: WIN mode setting to realize the habitual operation of win users |
| FN + E MAC OS mode2 MAC OS mode | ② FN + E, onboard mode layer 2, "E" lights white LED. The reference setting: keyboard of MAC OS, the "control, option, command" key will be in the original position, user can modify the settings by the driver, download and save to the keyboard, no need to run and connect the driver when use the Mac's function settings. Press FN + 7& again, back to the standard mode. |
| Driver mode | Driver mode: Keyboard needs to be run and connected the driver in USB wired mode when realizes key function and light effects, some special function (for example: You may assign a macro of more than 32 bytes to a key in the driver mode while it's unavailable in those onboard mode layer) You must need keep the driver running and the keyboard connect with the driver. |
| FNx setting Onboard mode3 | FNx setting: If you don't like the FN position and FN combination key function, you can set your own FNx position and FNx combination key function, some special function keys, or combination keys, or macro keys, these settings of this mode can be called by the FNx key in layer1& layer2. All settings in these mode can be modified and saved to the keyboard. |

Backlight settings (Can not modify)

| Key | Function |
|----------|---------------------------------|
| FN + [] | Light effect pause/play |
| FN + I | Backlight ON/OFF |
| FN + J | Backlight mode 1-5 (Can modify) |
| FN + [] | Backlight mode 6-9 |
| FN + ↓ | Backlight brightness - |
| FN + ↑ | Backlight brightness + |
| FN + ← | Backlight Effect Speed - |
| FN + → | Backlight Effect Speed + |

Bluetooth settings (Only for bluetooth mode, can not modify)

| Key | Function |
|------------|--|
| FN + Space | Bluetooth ON/OFF switch Link to USB mode or the last BT equipment. |
| FN + Z | ① Long press: The red&green LED of Z keycap will flash. The ① bluetooth equipment can be paired. Press: The keyboard will connect the ① BT equipment or disconnect. |
| FN + X | ② Long press: The red&green LED of X keycap will flash. The ② bluetooth equipment can be paired. Press: The keyboard will connect the ② BT equipment or disconnect. |
| FN + C | ③ Long press: The red&green LED of C keycap will flash. The ③ bluetooth equipment can be paired. Press: The keyboard will connect the ③ BT equipment or disconnect. |

Note: If the Bluetooth pairing timed out or failed, please re-pair; if the Bluetooth pairing is successful on the equipment, but the keyboard can not work well, please delete this keyboard in the Bluetooth list, Turn off Bluetooth of your PC or Mobile, restart the keyboard, and re-pair.

System Control (Cannot modify)

| | |
|--------------|---|
| FN + Tab | Long press the [Tab] at the bottom of the Bluetooth dual-mode optical keyboard for 3 seconds to turn on/off keyboard, wired version doesn't have this function. |
| FN + Tab | Long press FN+Tab 3 seconds to on/off the Bluetooth dual-mode mechanical keyboard, wired version doesn't have this function. |
| FN + alt | Turn off/on the charging indicator, low voltage alarm, the wired version does not have this function. |
| FN + control | Keyboard's sleep time setting, white LED on: never sleep, 1:5minutes, 2:10minutes, ..., 9:45minutes to sleep. |

Fn function (Reference Settings, can be modified by driver)

| Key | Mac mode function | Win mode function |
|-------------|-------------------------------|-------------------|
| FN + 1 | Screen brightness - for Mac | F1 |
| FN + 2 | Screen brightness + for Mac | F2 |
| FN + 3 | □ □ for Mac | F3 |
| FN + 4 | □ □ for Mac | F4 |
| FN + 5 | ① One click call Siri for Mac | F5 |
| FN + 6 | Screenshot for Mac | F6 |
| FN + 7 | ⏪ Previous | F7 |
| FN + 8 | ⏸ Play/Pause | F8 |
| FN + 9 | ⏩ Next | F9 |
| FN + 0 | 🔇 Mute | F10 |
| FN + - | 🔊 Volume - | F11 |
| FN + = | 🔊 Volume + | F12 |
| FN + delete | delete | delete |
| FN + pgup | home | home |
| FN + pgdn | end | end |
| FN + win | 🔒 Lock/Unlock Win key | |
| FN + insert | fn 🔒 Lock/Unlock fn key | |
| FN + Esc | FN+Shift+Esc | |

Dongguan Jizhi Electronic Technology Co., Ltd.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. 15.19

Notes: The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment .


This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The device has been evaluated to meet general RF exposure requirement.

The device can be used in portable exposure condition without restriction

The device has been evaluated to meet general RF exposure requirements. The device can be used in portable exposure conditions without restriction

Documents / Resources



[Dongguan Jizhi Electronic Technology GK68S USB+ Bluetooth 2 Mode Keyboard](#) [pdf] Instructions

GK68S, 2AXE4-GK68S, 2AXE4GK68S, GK68S USB Bluetooth 2 Mode Keyboard, GK68, GK, GK68S, USB Bluetooth 2 Mode Keyboard, 2 Mode Keyboard, Keyboard