 **DONNER**
CV-2 TX Wireless
Microphone System



DONNER CV-2 TX Wireless Microphone System User Manual

[Home](#) » [Donner](#) » **DONNER CV-2 TX Wireless Microphone System User Manual** 

Contents

- [1 DONNER CV-2 TX Wireless Microphone System](#)
- [2 Package Contents](#)
- [3 Technical Reference](#)
- [4 Function Overview](#)
- [5 Introduction of TX Transmitter](#)
- [6 RX receiver function introduction](#)
- [7 Instructions for use](#)
- [8 TX and RX usage scenarios](#)
- [9 Safety instructions](#)
- [10 FCC Statement](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)




DONNER CV-2 TX Wireless Microphone System



Package Contents

1. Transmitter *1
2. Receiver *1
3. USB-A to Dual USB-C Charging Cable *1
4. Storage bag *1
5. Manual *1

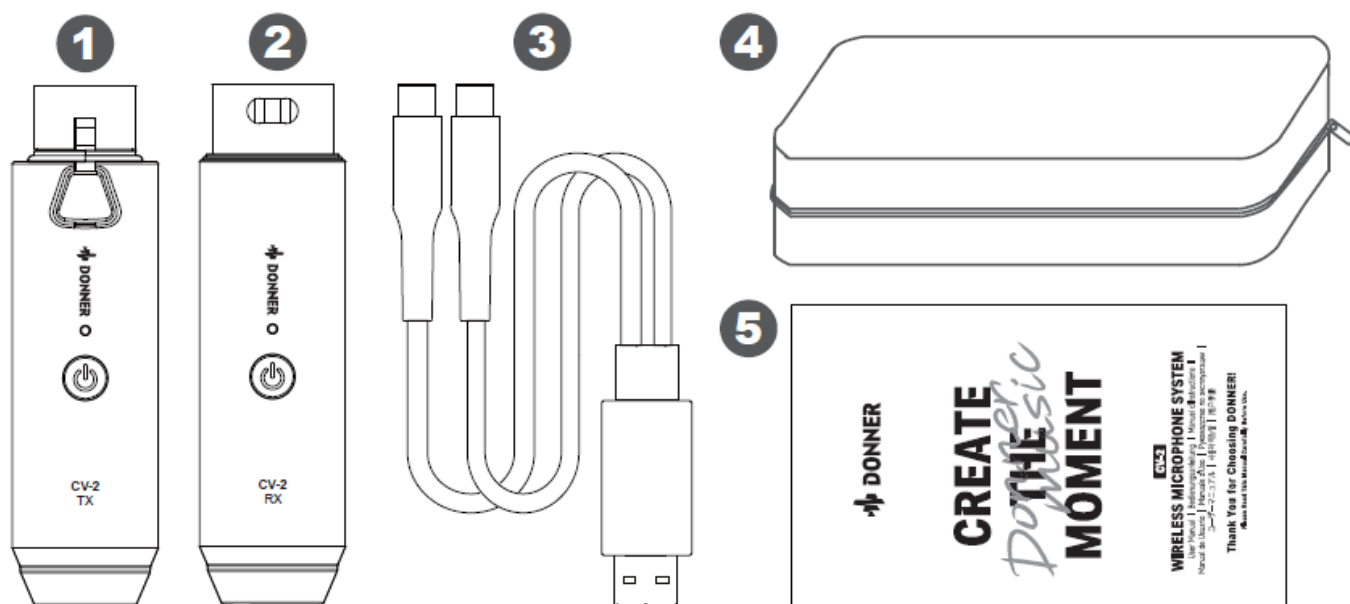


Technical Reference

1. Sampling Rate: 192kHz/24bit, Mono
2. Feet: $\geq 196\text{ft}$
3. Delay: $\leq 3.7\text{ms}$
4. Audio SNR: $\geq 100\text{dB}$
5. Input impedance: 20-50K
6. Background noise: $\leq -95\text{dBV}$
7. THD+N: $\leq -95\text{dB}$
8. Dynamic range: $\geq 100\text{dB}$
9. Frequency response range: 20Hz~20KHz
10. Usage Time: ≥ 8 hours and Charging Time: ≤ 2.5 hours
11. Built-in battery: 3.7V DC 400mAh 1480Wh (lithium polymer battery)
12. Charging input: 5V DC 100mA
13. Operating temperature: 0°C to 55°C
14. Storage temperature: -10°C to +55°C
15. External specifications: transmitter/receiver 80mm (length) * 23mm (diameter)

Function Overview

1. Wireless audio forwarding can replace wired audio transmission and achieve an experience almost identical to that of wired.
2. The 2.4G band intelligent frequency hopping communication protocol has strong anti-interference capabilities, handling up to 20% wireless error rate.
3. Using the exclusive HyFis codec, real-time full-frequency AI neural network noise reduction technology.
4. Industry-leading ultra-low latency, low power consumption, lossless high fidelity, and long-range transmission.
5. Applicable to professional stage performances, program hosting, musical instrument performances, webcasting, and more.

Introduction of TX Transmitter

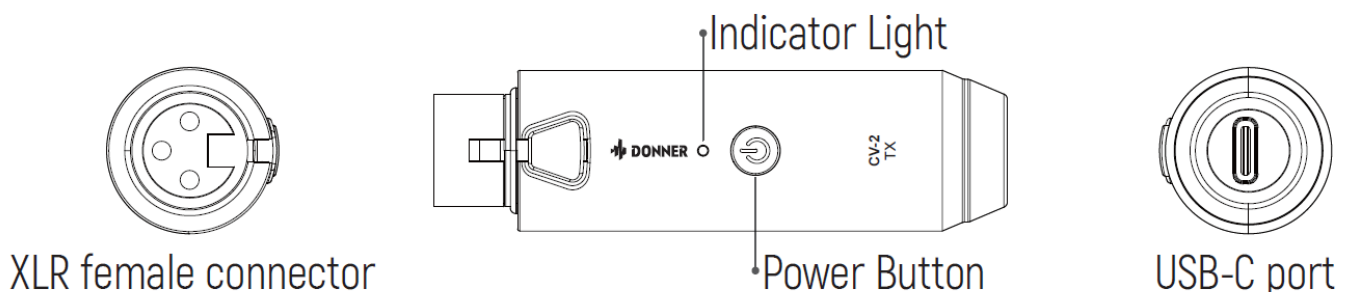


1. Power button: Power on/off switch.
Press and hold the power button for more than two seconds to switch on the device. Once powered on, the TX (transmitter) and RX (receiver) will automatically pair, provided that both TX and RX are powered on.
2. Indicator Light
 - Blue light is always on: Paired and connected.

- Blue light is blinking slowly: Disconnected.
- Blue light is blinking rapidly: Pairing mode.
- Red light is always on: Charging state (Note: The device will automatically enter standby mode and cannot be used while charging).
- Lights off: Powered off or fully charged.
- When the power is lower than 10%, the indicator light flashes red at a frequency of 0.5s. When the power is turned off for charging, the indicator light is always on red, and the light goes out when it is fully charged.

3. Power Connector:

Type-C port, for charging and firmware upgrades.

RX receiver function introduction

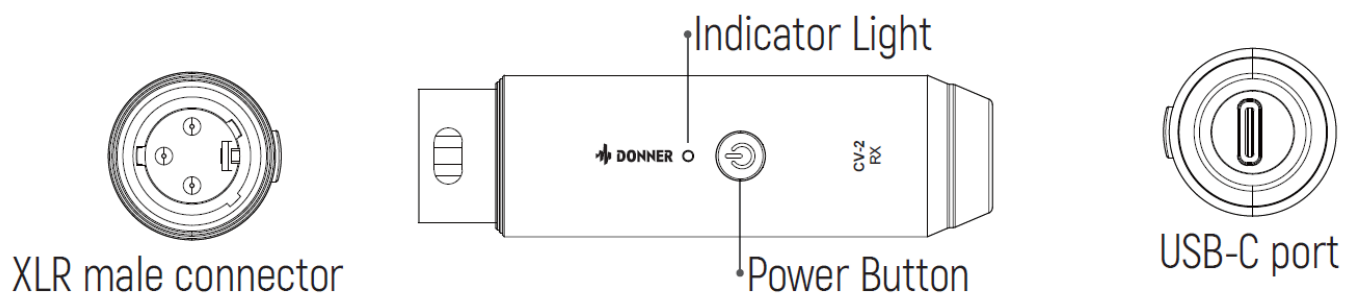

1. Power button: Power on/off switch.

Press and hold the power button for more than two seconds to switch on the device. Once powered on, the TX (transmitter) and RX (receiver) will automatically pair, provided that both TX and RX are powered on.

2. Indicator Light

- Blue light is always on: Paired and connected.
- Blue light is blinking slowly: Disconnected.
- Blue light is blinking rapidly: Pairing mode.
- Red light is always on: Charging state (Note: The device will automatically enter standby mode and cannot be used while charging).
- Lights off: Powered off or fully charged.
- When the power is lower than 10%, the indicator light flashes red at a frequency of 0.5s. When the power is turned off for charging, the indicator light is always on red, and the light goes out when it is fully charged.

3. Power interface:

Type-C interface, for charging, upgrading firmware


Instructions for use

1. Plug the TX (transmitter) into the XLR output connector of the microphone or device.
2. Plug the RX (receiver) into the XLR input connector of an active speaker or mixer.
3. First, turn on the power switches of the TX (transmitter) and RX (receiver), and then turn on the speaker power.
4. Ensure that there are no obstacles or walls between the TX (transmitter) and RX (receiver), and that the straight-line distance does not exceed the effective operating range.

TX and RX usage scenarios

Use it with a sound card:


Plug the TX (transmitter) into the XLR output connector of the microphone and the RX (receiver) into the XLR input connector of the sound card.

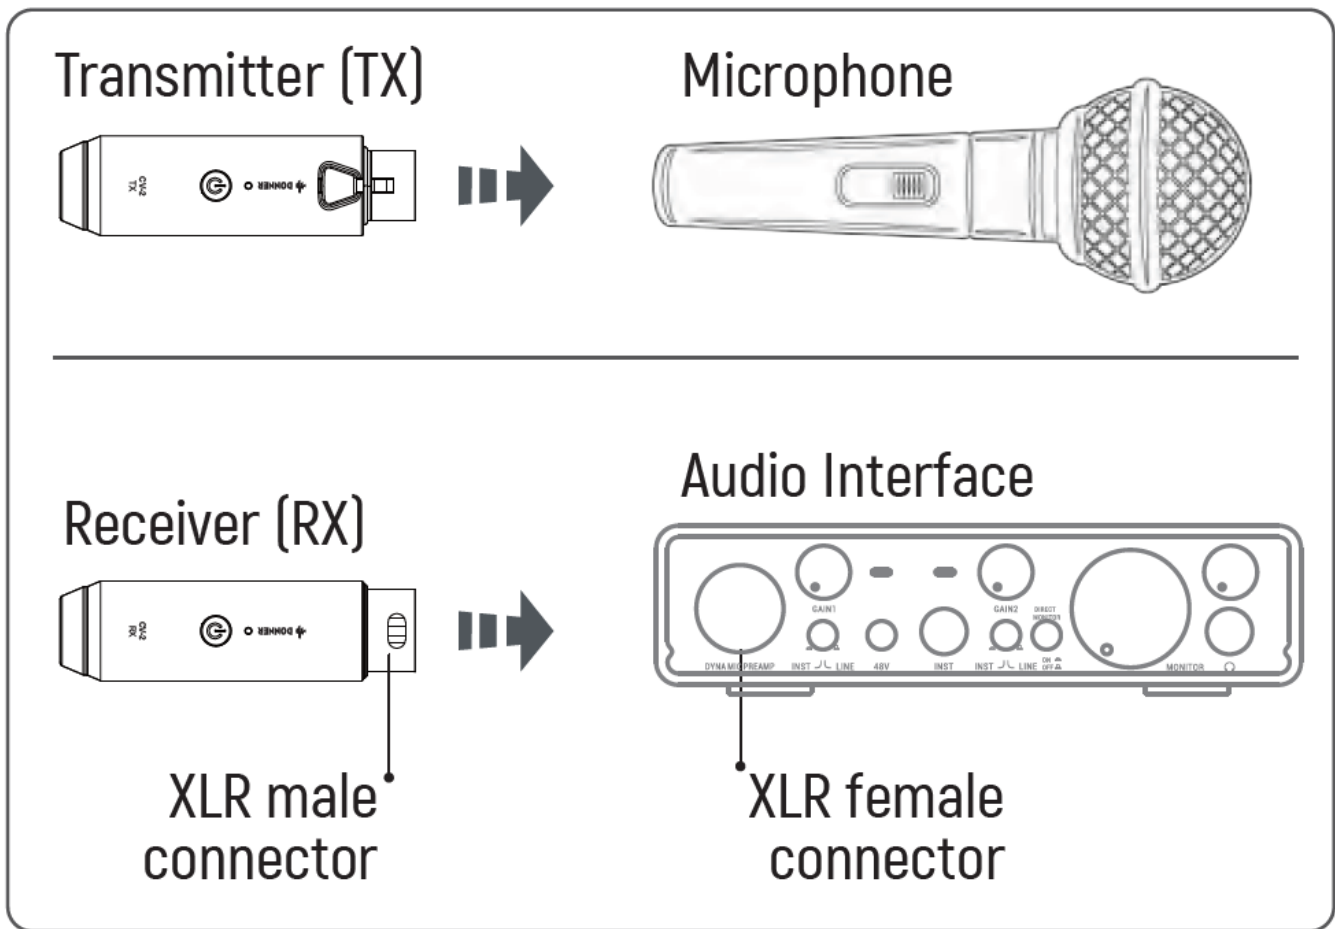

Use on the speaker:

Insert TX (transmitter) into the XLR output connector of the microphone and RX (receiver) into the XLR input connector of the speaker.

Transmitter (TX)



Microphone



Receiver (RX)



XLR male
connector



Speaker



For use with a mixing console:

Plug the TX (transmitter) into the XLR output connector of the microphone, and the RX (receiver) into the XLR input connector of the mixing console.

Transmitter (TX)



Microphone




Receiver (RX)



XLR male
connector




Mixer/Console

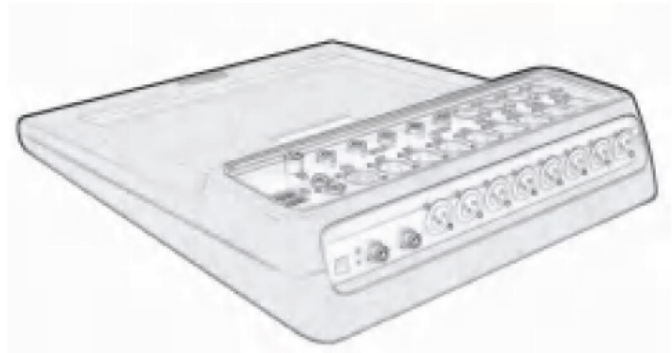


Safety instructions

1. This product is a precision electronic device and should be kept away from water and protected from heavy impacts. If it accidentally gets wet, please turn off the device, shake off the water, and promptly seek assistance from professional technical personnel.
2. When not in use for an extended period, the battery should be fully charged every three months to maintain its performance.
3. The battery inside the device should not be exposed to direct sunlight, fire, or other sources of excessive heat.
4. Please use the cables/connectors supplied with this product or those recommended by the dealer/manufacturer; otherwise, the product may not function properly.
5. Please select chargers that have obtained the national CCC certification to avoid damaging the equipment and preventing dangerous accidents.
6. To prevent signal interruptions, try to keep the transmitter and receiver facing each other.
As shown in the figure below.

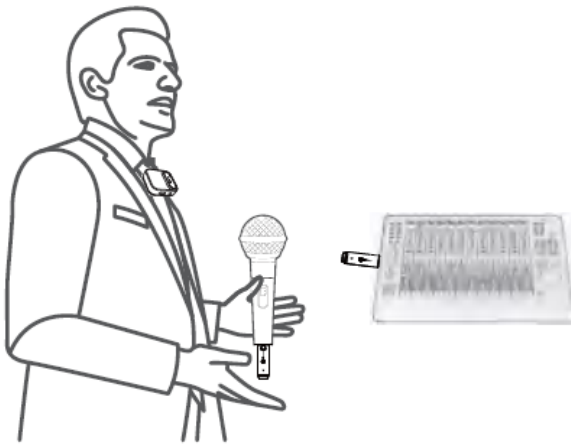

face to face(correct)

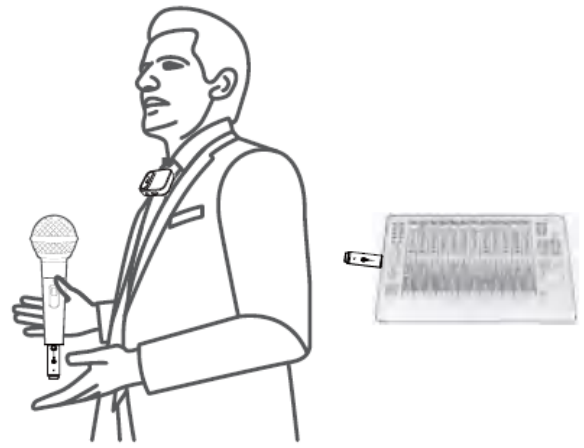

back to back (incorrect)

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the users authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF warning statement

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Website: www.donnermusic.com

Email: service@donnermusic.com

Copyright © 2024 Donner LLC. All rights reserved.

Manufacturer: Guangzhou Ranton Technology Co., Ltd. Address: Room 7002 and 7003, 7th Floor, Digital Entertainment Industrial Park, Greater Bay Area, No. 28 Huangpu Park West Road, Huangpu District, Guangzhou, China.

Documents / Resources

<div>版本:</div> <div>1. 标题: 10kg 无线话筒</div> <div>2. 操作方式: 手持式</div> <div>3. 尺寸: 197 x 200mm</div> <div>4. 品牌: 卓晨</div> <div>5. 规格: 100</div> <div>6. 详细规格: 100 和 100S</div> <div>7. 设计/修改</div> <div>注意: 此图无版权限制</div> <div>A 20200512 版本</div>	<div>DONNER CV-2 TX Wireless Microphone System [pdf] User Manual</div> <div>CV-2 TX, CV-2 TX Wireless Microphone System, Wireless Microphone System, Microphone System</div>
--	--

References

- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.