



DRAGNO LWL02 LoRaWAN Door Sensor User Manual

[Home](#) » [DRAGNO](#) » DRAGNO LWL02 LoRaWAN Door Sensor User Manual 

DRAGNO LWL02 LoRaWAN Door Sensor



Contents

- 1 Introduction
 - 1.1 What is LWL02 LoRaWAN Door Sensor
 - 1.2 Features
 - 1.3 Applications
 - 1.4 Dimension
 - 1.5 Firmware Change log
- 2 Power ON LWL02
- 3 How to install LWL02
- 4 Operation Mode
 - 4.1 How it works?
 - 4.2 Example to join LoRaWAN network
 - 4.3 Uplink Payload
 - 4.4 Downlink Payload
 - 4.5 Integrate with Datacake
 - 4.6 Alarm Base on Timeout
 - 4.7 LEDs
- 5 Battery & How to replace
 - 5.1 Battery Type and replace
 - 5.2 Power Consumption Analyze
- 6 Use AT Command
 - 6.1 Access AT Command
- 7 FAQ
 - 7.1 How to upgrade the image?
 - 7.2 How to change the LoRa Frequency Bands/Region?
 - 7.3 Can I disable uplink for each event to save battery life?
- 8 Order Info
- 9 Packing Info
- 10 Support
- 11 Documents / Resources
- 12 Related Posts

Introduction

What is LWL02 LoRaWAN Door Sensor

The Dragino LWL02 is a LoRaWAN Water Sensor. When there is water between the two metal probes, LWL02 indicates a water leak event and uplink to IoT server via LoRaWAN network.

LWL02 is powered by 2 x AAA batteries and target for long time use, these two batteries can provide about 16,000 ~ 70,000 uplink packets, which result in 2 ~ 10 years battery life. After battery running out, user can easily open the enclosure and replace with 2 common AAA batteries.

The LWL02 will send periodically data every day as well as for each water leak event. It also counts the water leak times and calculate last water leak duration. User can also disable the uplink for each water leak event, instead, device can count each event and uplink periodically.

Each LWL02 is pre-load with a set of unique keys for LoRaWAN registration, register these keys to LoRaWAN server and it will auto connect after power on.

LWL02 in a LoRaWAN Network




Features

- LoRaWAN Class A v1.0.3
- Frequency Bands: CN470/EU433/KR920/US915/EU868/AS923/AU915/IN865/RU864
- SX1262 LoRa Core
- Water Leak detect
- 2 x AAA LR03 Batteries
- AT Commands to change parameters
- Uplink on periodically and open/close action
- Remote configure parameters via LoRa Downlink
- Firmware upgradable via program port

Applications

- Smart Buildings & Home Automation
- Logistics and Supply Chain Management
- Smart Metering
- Smart Agriculture
- Smart Cities
- Smart Factory

Dimension

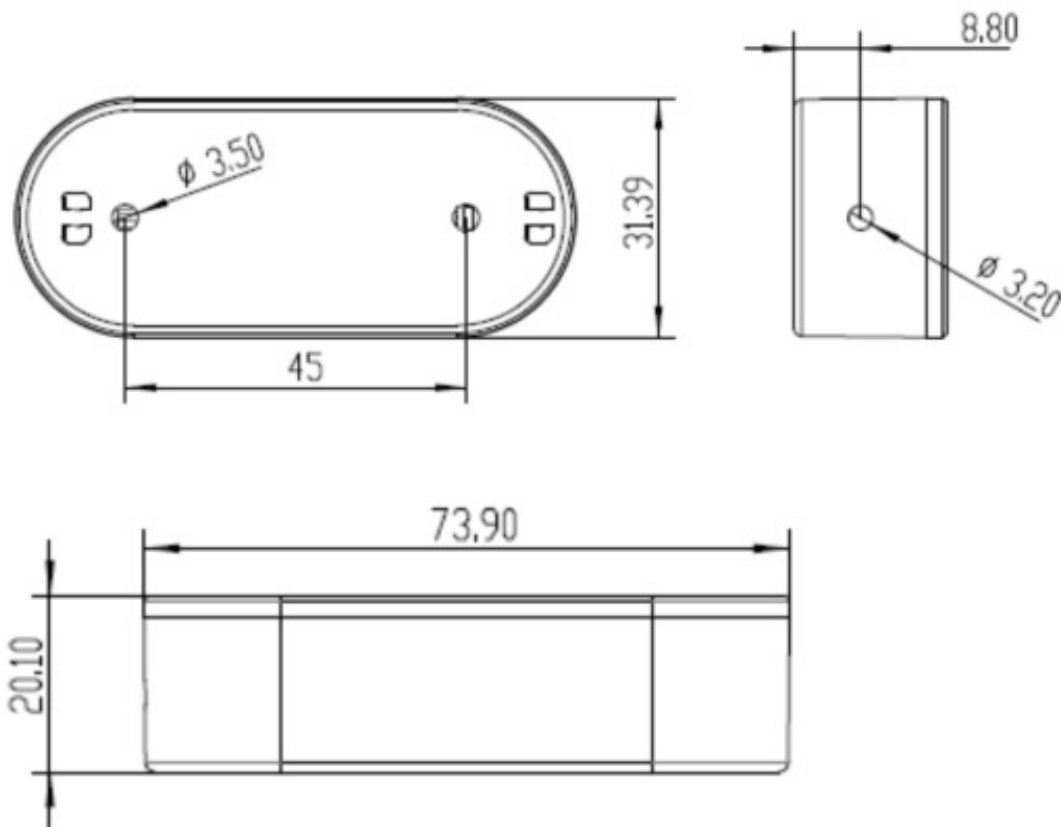

Firmware Change log

LWL02 use the same firmware as LDS01.


[LWL02 Image files – Download link](#)

Power ON LWL02

When receive the LWL02, please open the enclosure and add 2 x AAA batteries to power it. The LED will blink when device is powered.

How to install LWL02

When install the LWL02 on wall. Please install as below so the water leak probe will be soak in water for water detect purpose. The LWL02 main body is not water proof. Please don't let water go inside the LWL02 main body.

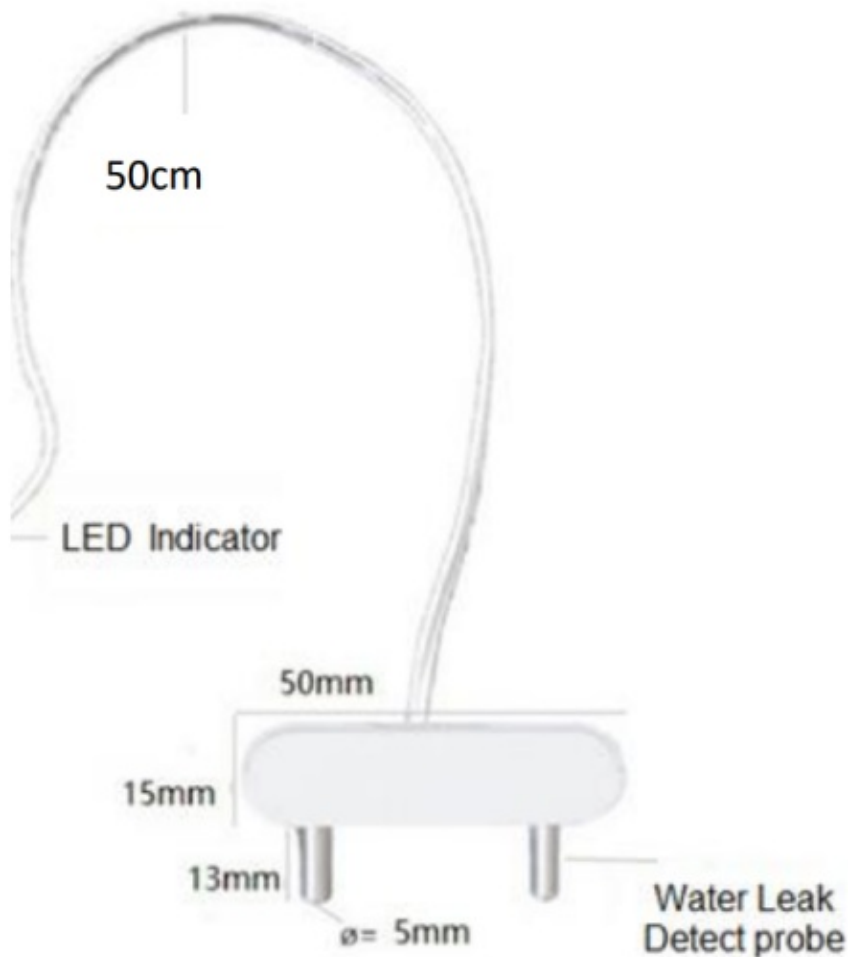

Operation Mode

How it works?

The LWL02 is configured as LoRaWAN OTAA Class A mode by default. It has OTAA keys to join network. To connect a local LoRaWAN network, user just need to input the OTAA keys in the network server and power on the LWL02. It will auto join the network via OTAA.

In case user can't set the OTAA keys in the network server and has to use the existing keys from server. User can use AT Command to set the keys in the devices.

Example to join LoRaWAN network

Here shows an example for how to join the [TTN V3 Network](#). Below is the network structure, we use [LG308](#) as LoRaWAN gateway here.



The LWL02 has water leak detect probe as above. When there is water between these two detect probe, they will be short and generate the water leak event. and send the status to LoRaWAN server.

- A keep-alive message which send once per day.
- An emergency event message when detect a water leak. (Alarm event can be disabled)
- A periodically update at every 10 minutes when in water leak.
- A message when switch from water leak to none water leak. (Alarm event can be disabled)

The LG308 is already set to connect to [TTN V3 network](#) . What we need to now is only configure the TTN V3:

Step 1: Create a device in TTN V3 with the OTAA keys from LWL02.

Each LWL02 is shipped with a sticker with unique device EUI:



User can enter this key in their LoRaWAN Server portal. Below is TTN V3 screen shot:
Add APP EUI in the application.

Add application

Owner *

davidhuang

Application ID *

my-new-application

Application name

My new application

Description

Description for my new application

Optional application description; can also be used to save notes about the application

Create application



4 End devices 2 Collaborators 2 API keys

Created 55 days ago

General information

Application ID 123

Created at Feb 2, 2021 13:12:30

Last updated at Apr 30, 2021 13:00:33

Live data

See all activity →

↑ 18:09:42 1231234567. Forward data message to Application Server

⬇ 18:09:42 1231234567. Store upstream data message

↑ 18:09:42 1231234567. Forward uplink data message

↑ 18:09:42 1231234567. Receive uplink data message

↑ 18:09:42 1231234567. Successfully processed data message

↑ 18:09:42 1231234567. Drop data message

End devices (0)

Search by ID

Import end devices

Add end device

ID

Name

DevEUI

JoinEUI

Created

Register end device

[From The LoRaWAN Device Repository](#)

[Manually](#)

1. Select the end device

Brand *

Dragino Technology Co.,...

Model *

Type to search...

Cannot find your exact end device?

2. Enter registration data

Please choose an end device first to

Register end device

- LBT1
- LD0S20
- LD0S75
- LD0S01
- LGT92
- LHT65
- LSE01
- LSN50-V2

Applications > lgt92-test > End devices > Register from The LoRaWAN Device Repository

Register end device

[From The LoRaWAN Device Repository](#)

[Manually](#)

1. Select the end device

Brand *

Dragino Technology Co.,...

Model *

LWL02

Hardware Ver. *

Unknown ..

Firmware Ver. *

1.5

Profile (Region) *

AS_923



LWL02

MAC V1.0.3, PHY V1.0.3 REV A, Over the air activation (OTAA), Class A

LoRaWAN Water Leak Sensor

[Product website](#) [Data sheet](#)

Add APP KEY and DEV EUI

2. Enter registration data

Frequency plan ⓘ *

Europe 863-870 MHz (SF12 for RX2)

The frequency plan used by the end device

AppEUI ⓘ *

.....00

The AppEUI uniquely identifies the owner of the end device. If no AppEUI is provided by the device manufacturer (usually for dev

DevEUI ⓘ *

.....

The DevEUI is the unique identifier for this end device

AppKey ⓘ *

.....

The root key to derive session keys to secure communication between the end device and the application

End device ID *

my-new-device

After registration

Step 2: Power on LWL02 and it will auto join to the TTN V3 network. After join success, it will start to upload message to TTN V3 and user can see in the panel.

↑ 10:35:02	Forward data message to Applic...	DevAddr: 20 88 9C 33	PAC payload: 1A 00 0E 16 02 00 20 40 E9 06	FPort: 10	SNR: -6.5	RSSI: -128	Bandwidth: 125000
● 10:35:02	Store upstream data message	DevAddr: 20 88 9C 33					
↓ 10:35:03	Successfully scheduled data do...	DevAddr: 20 88 9C 33					
↓ 10:35:03	Schedule data downlink for tra...	DevAddr: 20 88 9C 33	Rx1 Delay: 5				
↑ 10:35:03	Forward uplink data message	DevAddr: 20 88 9C 33	TX_LEAK_DURATION: 0, MOD: 2, WATER_LEAK_STATUS: 1, WATER_LEAK_TIMES: 48 02 00 00 00 00 00 00	FPort: 10	SNR: -6.5	RSSI: -128	Bandwidth: 125000
↑ 10:35:03	Receive uplink data message	DevAddr: 20 88 9C 33					
↑ 10:35:03	Successfully processed data me...	DevAddr: 20 88 9C 33	FPort: 400	FPort: 10	PAC payload: 1A 00 0E 16 02 00 20 40 E9 06	Bandwidth: 125000	SNR: -6.5
↑ 10:35:03	Drop data message		Uplink is a duplicate				
↑ 10:35:03	Drop data message		Uplink is a duplicate				

Uplink Payload

Uplink Payload total 9 bytes.

Size(bytes)	2	1	3	3
value	Status&BAT	MOD Always:0x02	Total water leak events	Last water leak duration (unit: min)

Example:

payload: 48 E2 02 00 00 00 00 00 01 BAT_V: 3.042 LAST_WATER_LEAK_DURATION: 1 MOD: 2 WATER_LEAK_STATUS: 1 WATER_LEAK_TIMES: 8

Example Payload Decoder in TTN V3:

http://www.dragino.com/downloads/index.php?dir=LoRa_End_Node/LDS01/Payload/

Downlink Payload

Downlink Control Type	Type Code	Downlink payload size(bytes)
TDC (Transmit Time Interval—Keep Alive Interval)	0x01	4
RESET	0x04	2
Set confirmed mode	0x05	2
Clear Counting	0xA6	2
Enable/Disable Alarm	0xA7	2
Control ADR/DR	0xA8	3
Set Alarm Timeout	0xA9	4

Example Downlink payload setting in TTN V3:

The screenshot shows the 'Downlink' configuration page in TTN V3. The 'Schedule downlink' section is active. Under 'Insert Mode', the 'Replace downlink queue' option is selected. The 'FPort' is set to 1. The 'Payload' field contains the hexadecimal value '01 00 00 3C'. Below the payload field, there is a checkbox for 'Confirmed downlink' which is currently unchecked. At the bottom of the form is a blue button labeled 'Schedule downlink'.

[Type Code 0x01](#)

If the payload=0100003C, means to control the LWL02's Keep Alive interval to 0x00003C=60(S)

[Type Code 0x04](#)

If payload = 0x04FF, it will reset the LWL02.

[Type Code 0x05](#)

0x05 00: Set uplink to LoRaWAN unconfirmed mode

0x05 01: Set uplink to LoRaWAN confirmed mode

[Type Code 0xA6](#)

Example: 0xA601: Clear Counting

For LWL02: reset both count number and time.

Type Code 0xA7

0xA7 01 : Equal to AT+DISALARM=1

0xA7 00 : Equal to AT+DISALARM=0

Type Code 0xA8

Format: 0xA8 aa bb

aa: 1: Enable ADR; 0: Disable ADR (Same as AT+CADR command)

bb: set DR (Same as AT+CDATARATE ,only valid after ADR=0)

Example: 0x A8 00 02 : Set ADR=0 and DR=1

Type Code 0xA9


See Alarm Base Timeout for detail.

Integrate with Datacake

Datacake provides a human friendly interface to show the sensor data, once we have data in TTN V3, we can use Datacake to connect to TTN V3 and see the data in Datacake. Below are the steps:

Step 1: Be sure that your device is programmed and properly connected to the network at this time.

Step 2: To configure the Application to forward data to Datacake you will need to add integration. To add the Datacake integration, perform the following steps:

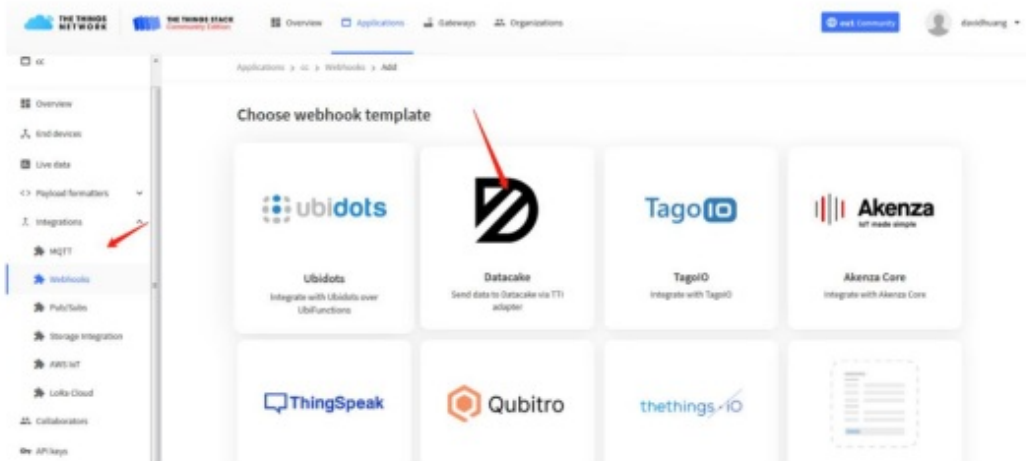

Add custom webhook

Template information



Datacake

Send data to Datacake via TTI adapter

[About Datacake](#)  | [Documentation](#) 


Template settings

Webhook ID ^{*}

Token ^{*}

Datacake API Token

Create datacake webhook

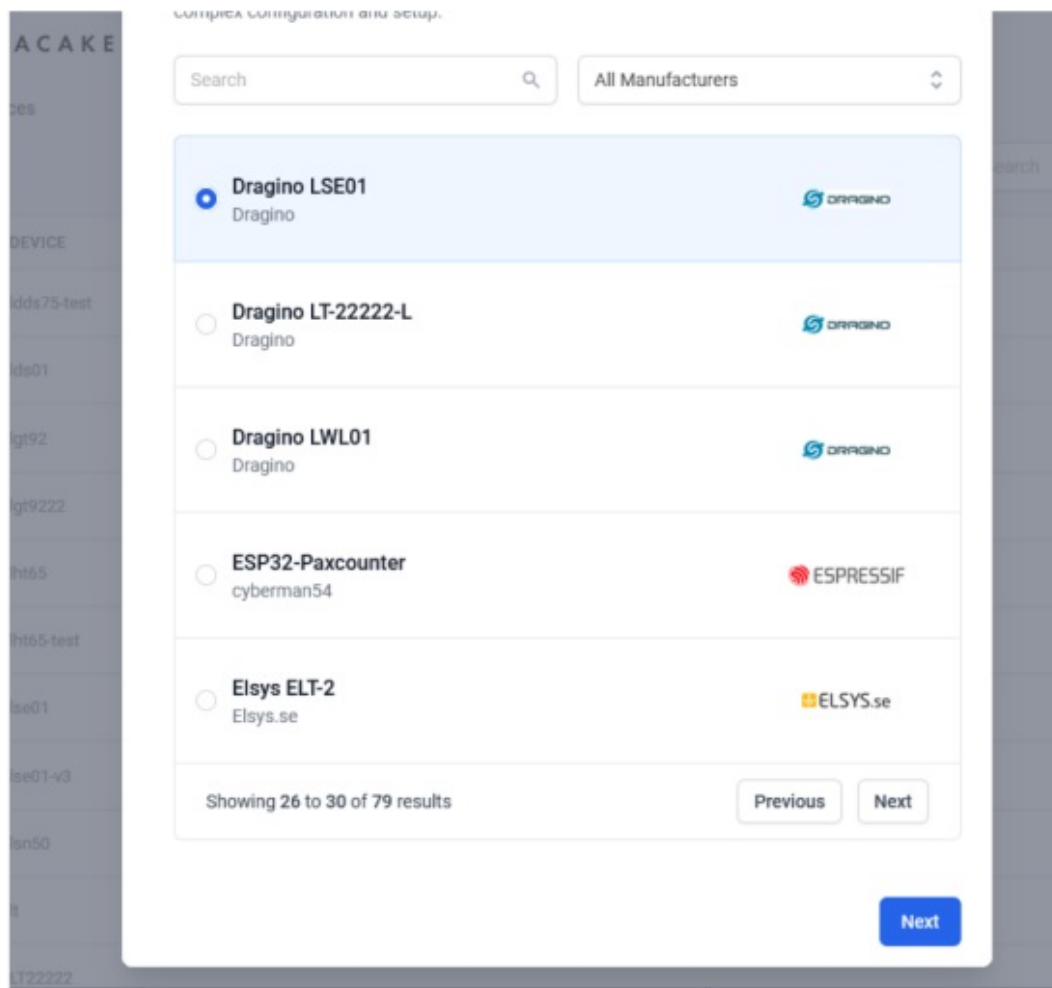

Step 3: Create an account or log in Datacake.

Step 4: Search LWL02 and add DevEUI.

Alarm Base on Timeout

LWL02 can monitor the timeout for a status change, this feature can be used to monitor some event such as open fridge too long etc.

User configure this feature by using:

AT Command to configure:

> AT+TTRIG=1,30 → When status change from close to open, and device keep in open status for more than 30 seconds. LWL02 will send an uplink packet, the Alarm bit (the lowest bit of 10th byte of payload) on this uplink packet is set to 1.

> AT+TTIG=0,0 → Default Value, disable timeout Alarm.

Downlink Command to configure:

Command: 0xA9 aa bb cc

A9: Command Type Code

aa: status to be monitor

bb cc: timeout.

If user send 0xA9 01 00 1E: equal to AT+TTRIG=1,30

Or

0xA9 00 00 00: Equal to AT+TTRIG=0,0. Disable timeout Alarm.

LEDs

Action	LED behavior
Power On	GREEN on 1s, RED on 1s, BLUE on 1s
Joined successful	GREEN LED on 5s
Send an uplink message	GREEN LED blinks once
Got a downlink message	BLUE LED blinks once

Battery & How to replace

Battery Type and replace

LWL02 is equipped with 2 x AAA LR03 batteries. If the batteries running low(see 2.1v in the platform). User can buy generic AAA battery and replace it. Note:

1. The LWL02 doesn't have any screw, use can use nail to open it by the middle.
2. Make sure the direction is correct when install the AAA batteries.

Important Notice: Make sure use new AAA LR03 battery and the battery doesn't have broken surface.

Example of AAA LR03 batter:



Power Consumption Analyze

Dragino battery powered products are all run in Low Power mode. User can check the guideline from this link to calculate the estimate battery life:

https://www.dragino.com/downloads/downloads/LoRa_End_Node/Battery_Analyze/DRAGINO_Battery_Life_Guide.pdf

Use AT Command

Access AT Command

LWL02 supports AT Command set. User can use a USB to TTL adapter to configure LWL02 via use AT command, as below.



USB to TTL <- -> LWL02


RX <- -> TX

TX <- -> RX

GND <- -> GND

In PC, User needs to set [serial tool](#) (such as [putty](#), SecureCRT) baud rate to **115200** to access to access serial console of LWL02. Below is the output for reference:

The AT Access password is **123456**.

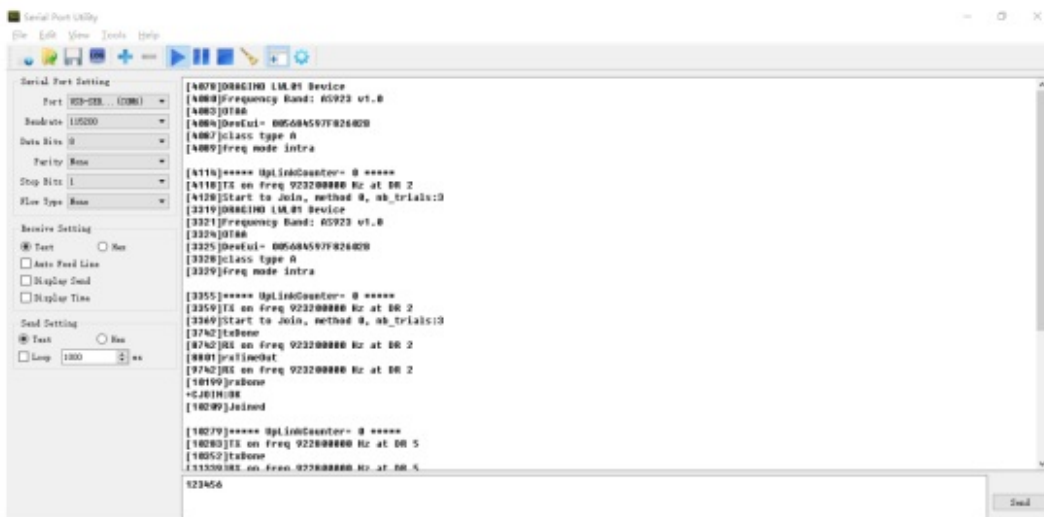

Each AT Command need to **add an ENTER** at the end before send.

When entering the first command, the **RED LED** will on and user can now input AT Commands. After input all needed AT Commands, please input AT+CLPM=1 to set the device to work in Low Power mode and **RED LED** will be off.

More detail AT Command manual can be found at [AT Command Manual](#)

FAQ

How to upgrade the image?

User can upgrade the firmware of LWL02 for bug fix, new features, or change working region. The upgrade instruction is here: http://wiki.dragino.com/index.php?title=Firmware_Upgrade_Instruction

How to change the LoRa Frequency Bands/Region?

If user has for example US915 frequency and want to change it to AS923 frequency. User can follow the introduction for [how to upgrade image](#). When download the images, choose the required image file for download

Can I disable uplink for each event to save battery life?

Yes, User can use below method to disable this:

[via AT Command:](#)

AT+DISALARM=1, End node will only send packet in TDC time.

AT+DISALARM=0, End node will send packet in TDC time or status change for door sensor.

[via LoRaWAN downlink Command:](#)

0xA701 : Equal to AT+DISALARM=1

0xA700 : Equal to AT+DISALARM=0

Order Info

Part Number: LWL02-XXX

XXX:

- > **EU433:** frequency bands EU433
- > **EU868:** frequency bands EU868
- > **KR920:** frequency bands KR920
- > **CN470:** frequency bands CN470
- > **AS923:** frequency bands AS923
- > **AU915:** frequency bands AU915
- > **US915:** frequency bands US915
- > **IN865:** frequency bands IN865
- > **CN779:** frequency bands CN779

Packing Info


Package Includes:

- ✓ LWL02 x 1

Support

- > Support is provided Monday to Friday, from 09:00 to 18:00 GMT+8. Due to different timezones we cannot offer live support. However, your questions will be answered as soon as possible in the before-mentioned schedule.
- > Provide as much information as possible regarding your enquiry (product models, accurately describe your problem and steps to replicate it etc) and send a mail to support@dragino.com





DRAGNO LWL02 LoRaWAN Door Sensor
User Manual

Model	Version	Language
LWL02	1.0	English

DRAGNO LWL02 LoRaWAN Door Sensor [pdf] User Manual

LWL02, LoRaWAN Door Sensor