



DS-SUM SUM-760S15AMGS 760W Programmable Driver with INV Digital Dimming Instructions

[Home](#) » [DS-SUM](#) » **DS-SUM SUM-760S15AMGS 760W Programmable Driver with INV Digital Dimming**
Instructions 

Contents

- 1 DS-SUM SUM-760S15AMGS 760W Programmable Driver with INV Digital Dimming
- 2 Features
- 3 Description
- 4 Total Harmonic Distortion
- 5 Parallel LED Protection
- 6 Documents / Resources
 - 6.1 References

DS-SUM

DS-SUM SUM-760S15AMGS 760W Programmable Driver with INV Digital Dimming



Features

- Panel Mount Connectors Facilitates Installation
- Hot-plugging Protection
- Parallel LED Protection
- Ultra High Efficiency (Up to 95.5%)
- Full Power at a Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC)with Programmability
- Isolated 0-10V/PWM/Resistor/3-Timer-Modes Dimmable
- Adjustable Dimming Curve
- INV Digital Dimming, UART-Based Communication Protocol
- Dim-to-Off with Standby Power $\leq 0.5W$
- Minimum Dimming Level with 5% or 10% Selectable
- Hold Time Adjustable
- Fade Time Adjustable
- Always-on Auxiliary Power: 12Vdc, 250mA
- Low Inrush Current
- Output Lumen Compensation
- End-of-Life Indicator
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: IOVP, IUVP, OVP, SCP, OTP
- IP66/IP67 and UL Dry/Damp/Wet Location
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- 5 Years Warranty

Description


The SUM-760SxxxMGS series is a 760W, constant-current, programmable and IP66/IP67 rated LED driver that operates from 90-305Vac input with excellent power factor. Created for many lighting applications including high mast, sports, UV-LED, aquaculture horticulture, etc. It provides an auxiliary voltage and dim-to-off functionality for powering low voltage, wireless controls. The dimming control supports 0-10V dimming as well as two-way communication via Digital Dimming, a UART-based communication protocol. The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, input under voltage, input over-voltage, output over-voltage, short circuit, and over-temperature.

Models

Adjustable Output Current Range (A)	Full-Power Current Range (A)(1)	Default Output Current (A)	Output Voltage Range (Vdc)	Max. Output Power (W)	Typical Efficiency (2)	Typical Power Factor		Model Number (3) (4)
						120Vac	220Vac	
1.4-15.8	14-15.8	14	34-54	760	95.5%	0.99	0.96	SUM-760S15AMGS

1. Output current range with constant power at 760W.
2. Measured at 100% load and 220Vac input (see below “General Specifications” for details).
3. Certified input voltage range: UL, FCC 100-277Vac; otherwise: 100-240Vac
4. SELV output

Operation Area

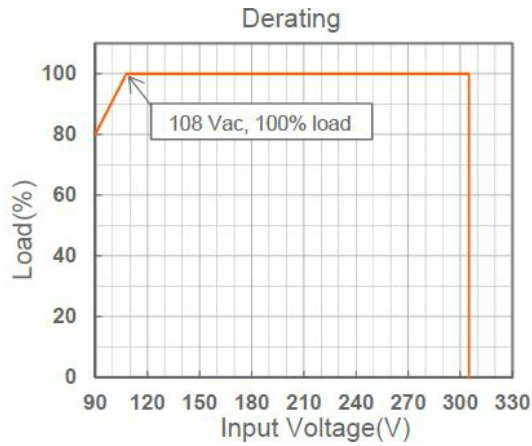

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input AC Voltage	90 Vac	–	305 Vac	
Input DC Voltage	127 Vdc	–	300 Vdc	
Input Frequency	47 Hz	–	63 Hz	
Leakage Current	–	–	0.75 mA	UL 8750; 277Vac/ 60Hz
	–	–	0.70 mA	IEC 60598-1; 240Vac/ 60Hz
Input AC Current	–	–	7.54 A	Measured at 100% load and 120 Vac input.
	–	–	4.05 A	Measured at 100% load and 220 Vac input.
Inrush Current(I^2t)	–	–	1.87 A ² s	At 220Vac input, 25°C cold start, duration=13.7 ms, 10%I _{peak} -10%I _{peak} .
PF	0.90	–	–	At 100-277Vac, 50-60Hz, 60%-100% Load (456- 760W)
THD	–	–	20%	
THD	–	–	10%	At 220-240Vac, 50-60Hz, 75%-100% Load (570- 760W)

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%loset	–	5%loset	100% load
Output Current Setting(loset Range) SUM-760S15AMGS	1400 mA	–	15800 mA	
Output Current Setting Range with Constant Power SUM-760S15AMGS	14000 mA	–	15800 mA	

Output Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Total Output Current Ripple (p k-pk)	–	5%lomax	10%lomax	100% load, 20 MHz BW
Output Current Ripple at < 200 Hz (pk-pk)	–	–	2%lomax	70%-100% load
Startup Overshoot Current	–	–	10%lomax	100% load
No Load Output Voltage SUM-760S15AMGS	–	–	60 V	
Line Regulation	–	–	±0.5%	100% load
Load Regulation	–	–	±3.0%	
Turn-on Delay Time	–	–	0.5 s	Measured at 120-277Vac input, 60%-100% Load
Temperature Coefficient of lo set	–	0.03%/°C	–	Case temperature = 0°C ~Tc max
12V Auxiliary Output Voltage	10.8 V	12 V	13.2 V	
12V Auxiliary Output Source Current	0 mA	–	250 mA	Return terminal is “Dim–“
12V Auxiliary Output Transient Peak Current@ 6W	–	–	500 mA	500mA peak for a maximum duration of 2.2ms in a 6.0ms period during which time the average should not exceed 250mA.
12V Auxiliary Output Transient Peak Current@10W	–	–	850 mA	850mA peak for a maximum duration of 1.3ms in a 5.2ms period during which time the average should not exceed 250mA.

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 120 Vac input: S UM-760S15AMGS I _o = 14000 mA I _o = 15800 mA	 91.5% 91.0%	 93.5% 93.0%	 — —	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Efficiency at 220 Vac input: S UM-760S15AMGS I _o = 14000 mA I _o = 15800 mA	 93.5% 93.0%	 95.5% 95.0%	 — —	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Efficiency at 277 Vac input: S UM-760S15AMGS I _o = 14000 mA I _o = 15800 mA	 93.5% 93.5%	 95.5% 95.5%	 — —	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Standby Power	—	—	0.5 W	Measured at 230Vac/50Hz; Dimming off
MTBF	—	201,000 Hours	—	Measured at 220Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK - 217F)
Lifetime	—	102,000 Hours	—	Measured at 220Vac input, 80%Load and 70°C case temperature; See lifetime v s. T _c curve for the details
	—	81,000 Hours	—	Measured at 220Vac input, 100%Load and 40°C ambient temperature

General Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Operating Case Temperature for Safety Tc _s	-40°C	–	+90°C	
Operating Case Temperature for Warranty Tc _w	-40°C	–	+80°C	Case temperature for 5 years warranty Humidity: 10%RH to 95%RH
Storage Temperature	-40°C	–	+85°C	Humidity: 5%RH to 95%RH
Dimensions Inches (L × W × H) Millimeter s (L × W × H)	15.35 × 4.25 × 1.91 390 × 108 × 48.5			With mounting ear 16.34 × 4.25 × 1.91 415 × 108 × 48.5
Net Weight	–	3500 g	–	

Dimming Specifications

Parameter		Min.	Typ.	Max.	Notes
Absolute Maximum Voltage on the Vdim (+) Pin		-20 V	–	20 V	
Source Current on Vdim (+) Pin		90 μ A	100 μ A	110 μ A	Vdim(+) = 0 V
Dimming Output Range with 10%-100% (Default)	SUM-760S15AMGS	10%loset	–	loset	14000mA \leq loreset \leq 15800 mA
	SUM-760S15AMGS	1400 mA	–	loset	1400mA \leq loreset 14000 mA
Dimming Output Range with 5%-100% (Settable)	SUM-760S15AMGS	5%loset	–	loset	14000mA \leq loreset \leq 15800 mA
	SUM-760S15AMGS	700 mA	–	loset	1400mA \leq loreset 14000 mA
Recommended Dimming Input Range		0 V	–	10 V	Default 0-10V dimming mode.
Dim off Voltage		0.35 V	0.5 V	0.65 V	
Dim on Voltage		0.55 V	0.7 V	0.85 V	
Hysteresis		–	0.2 V	–	
PWM_in High Level		3 V	–	10 V	Dimming mode set to PWM in Inventronics Programming Software.
PWM_in Low Level		-0.3 V	–	0.6 V	
PWM_in Frequency Range		200 Hz	–	3 KHz	
PWM_in Duty Cycle		1%	–	99%	
PWM Dimming off (Positive Logic)		3%	5%	8%	
PWM Dimming on (Positive Logic)		5%	7%	10%	
PWM Dimming off (Negative Logic)		92%	95%	97%	
PWM Dimming on (Negative Logic)		90%	93%	95%	
Hysteresis		–	2%	–	


Safety & EMC Compliance

Safety Category	Standard
UL/CUL	UL 8750, CAN/CSA-C22.2 No. 250.13
CE	EN 61347-1, EN 61347-2-13
CB	IEC 61347-1, IEC 61347-2-13
EMI Standards	Notes
EN IEC 55015 (1)	Conducted emission Test & Radiated emission Test
EN IEC 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
FCC Part 15(1)	ANSI C63.4 Class B
	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired Operation.
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: Differential Mode 6 kV, Common Mode 10 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment


Note

1. This LED driver meets the EMI specifications above, but the EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.


Derating

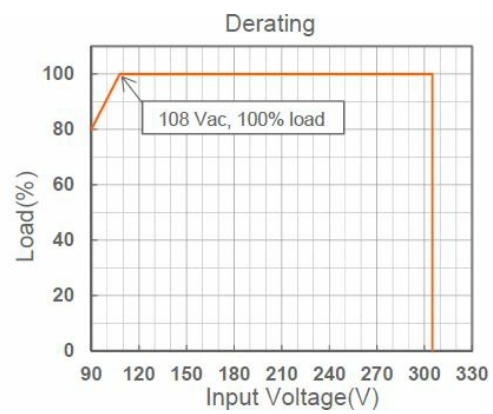

Lifetime vs. Case Temperature


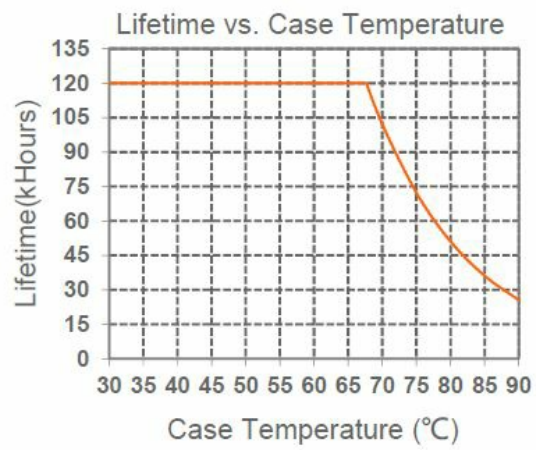


Inrush Current Waveform

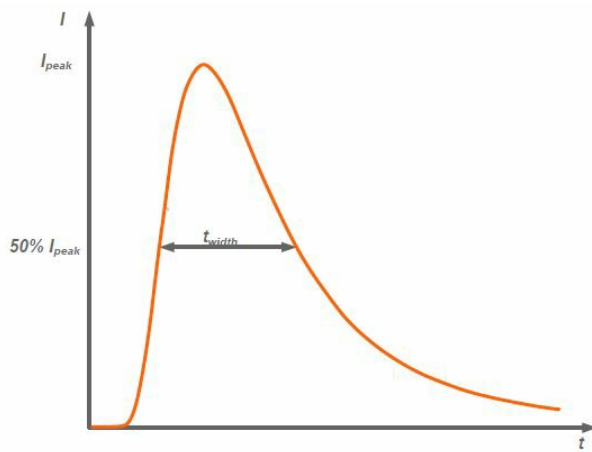


Input AC Voltage	I_{peak}	t_{width} (@ 50% I_{peak})
220Vac	13.5A	4.16ms


Efficiency vs. Load

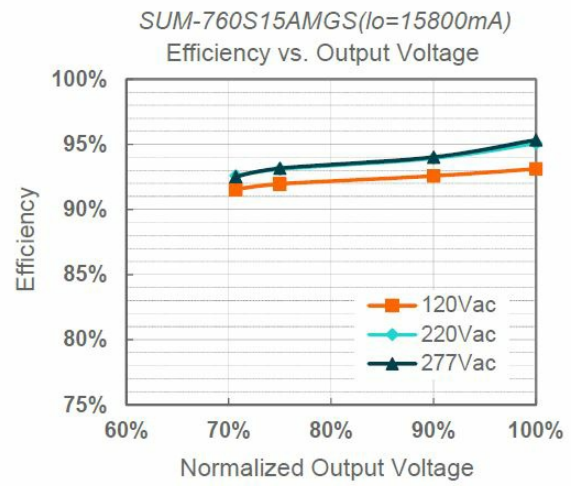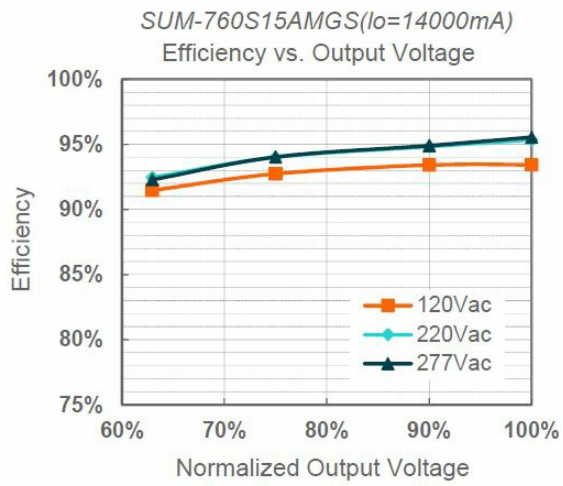


Power Factor

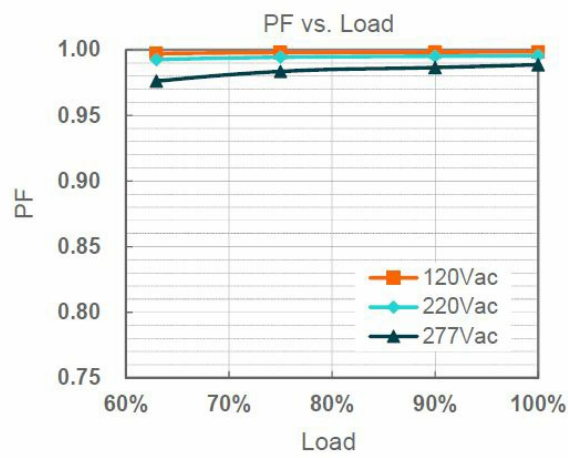

Total Harmonic Distortion

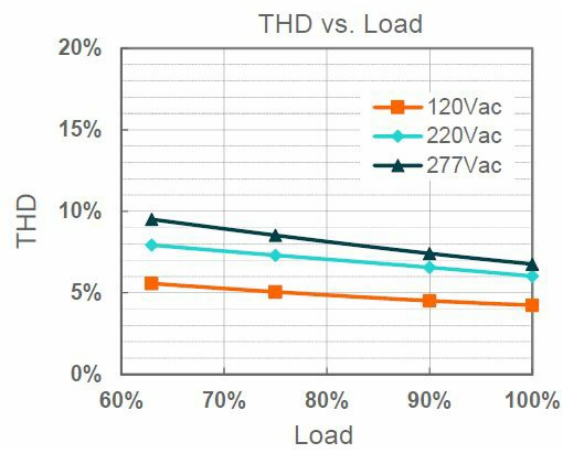

Hot-plugging Protection

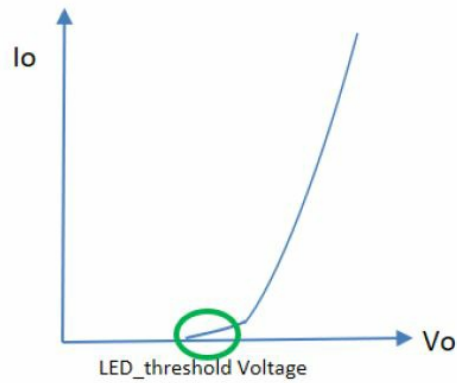


Parameter		Min.	Typ.	Max.	Notes
Hot-plugging Protection	LED Threshold Voltage Setting Range	44 V	–	54 V	Set V_{th} close to, but higher than the actual LED threshold voltage
	Setting Tolerance	-2%	–	2%	

This feature protects LEDs when connecting to a driver that is already powered on. This is disabled by default and can be enabled through the Inventronics Programming Software. The LED threshold voltage (V_{th}) is the minimum voltage required for current to flow through the LED load. After this threshold is met, the LED forward voltage (V_f) increases as the current increases. Set V_{th} close to, but higher than the actual LED threshold voltage for optimized performance. The greater the difference between the V_{th} setting and the actual LED threshold voltage, the higher the overshoot current will be. The V_{th} setting must be lower than V_f . Please test, program, and tune this feature for each LED load design.

Parameter		Min.	Typ.	Max.	Notes
Parallel LED Protection	Overload Voltage Setting Range	47 V	–	56 V	Set $V_{overload}$ close to, but higher than the maximum LED forward voltage
	Setting Tolerance	-2%	–	2%	

Parallel LED Protection

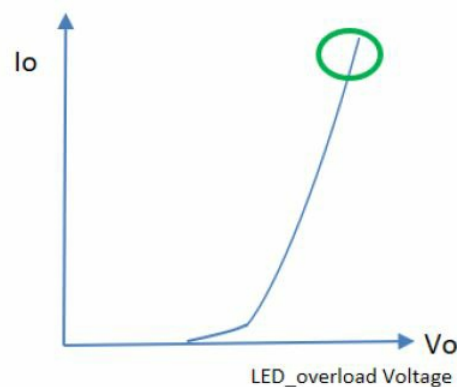


This feature helps protect parallel LEDs from a high, overcurrent condition by limiting the voltage. This is disabled by default and can be enabled through the Inventronics Programming Software. Set V_{overload} close to, but higher than the maximum forward voltage for optimized performance. The greater the difference between the V_{overload} setting and the maximum forward voltage, the higher the overload stress will be. The V_{overload} setting must be higher than V_f . Please test, program, and tune this feature for each LED load design.


Protection Functions

Parameter		Min.	Typ.	Max.	Notes
Over Voltage Protection		Limits output voltage at no load and in case the normal voltage limit fails.			
Short Circuit Protection		Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.			
Over Temperature Protection		Decreases output current, returning to normal after over temperature is removed.			
Input Under Voltage Protection (IUVP)	Input Under Voltage Protection	70 Vac	80 Vac	90 Vac	Turn off the output when the input voltage falls below protection voltage.
	Input Under Voltage Recovery	75 Vac	85 Vac	95 Vac	Auto Recovery. The driver will restart when the input voltage exceeds recovery voltage.
Input Over Voltage Protection (IOVP)	Input Over Voltage Protection	310 Vac	320 Vac	330 Vac	Turn off the output when the input voltage exceeds protection voltage.
	Input Over Voltage Recovery	300 Vac	310 Vac	320 Vac	Auto Recovery. The driver will restart when the input voltage falls below recovery voltage.
	Max. of Input Over Voltage	—	—	350 Vac	The driver can survive for 8 hours with a stable input voltage stress of 350Vac.



Input Under Voltage Protection Diagram

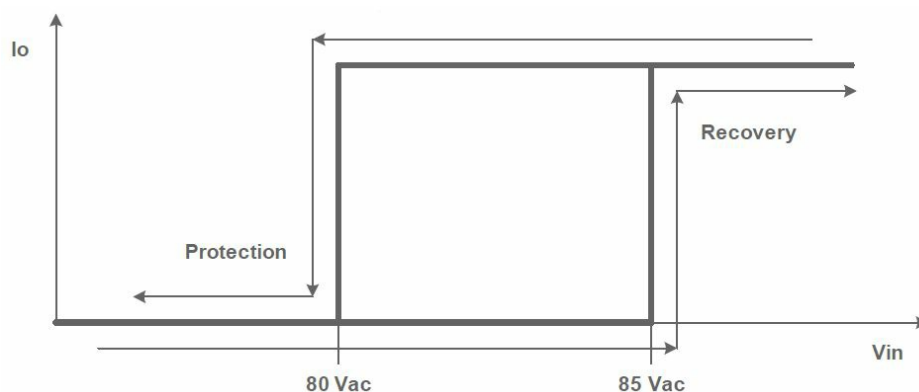

Input Over Voltage Protection Diagram

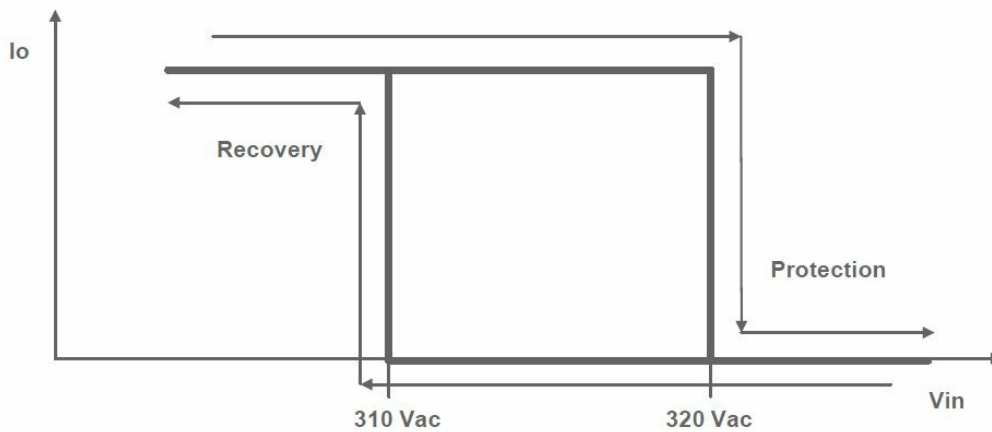

Dimming

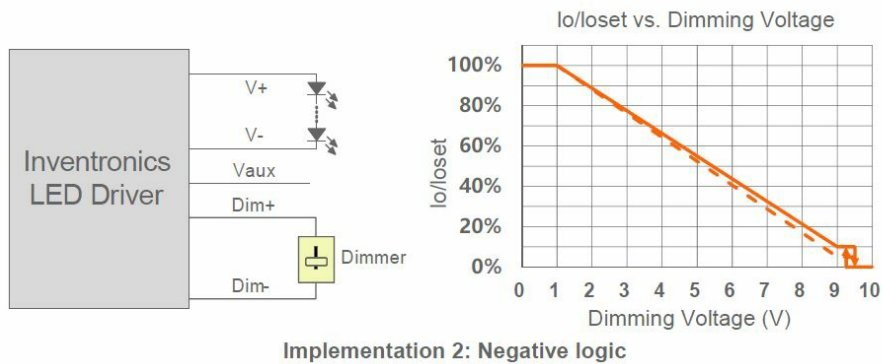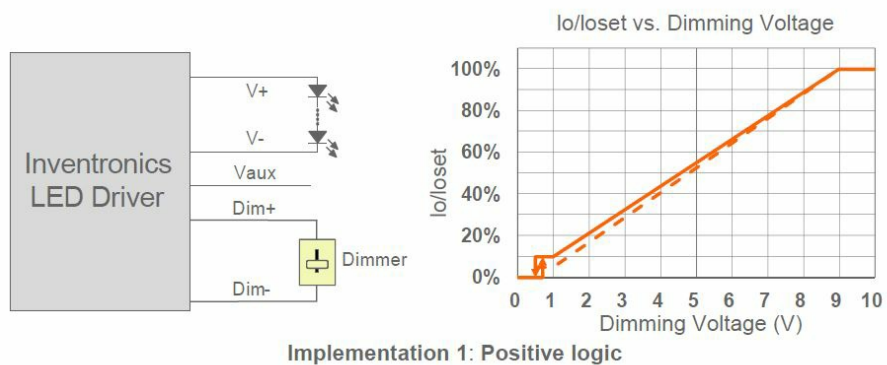

0-10V Dimming



The recommended implementation of the dimming control is provided below.

Notes

1. Do NOT connect $Dim-$ to the output $V-$ or $V+$, otherwise the driver will not work properly.
2. The dimmer can also be replaced by an active 0-10V voltage source signal or passive components like a zener.
3. When 0-10V negative logic dimming mode and $Dim+$ are open, the driver will dim to off and be on standby.

PWM Dimming

The recommended implementation of the dimming control is provided below.

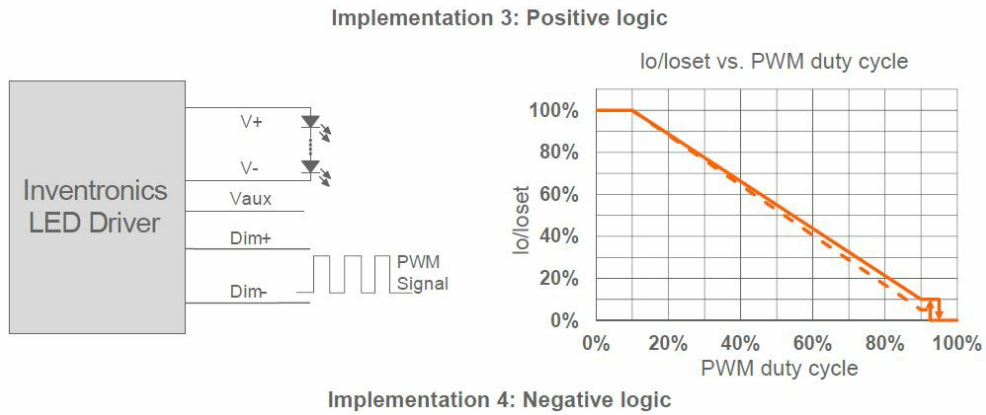
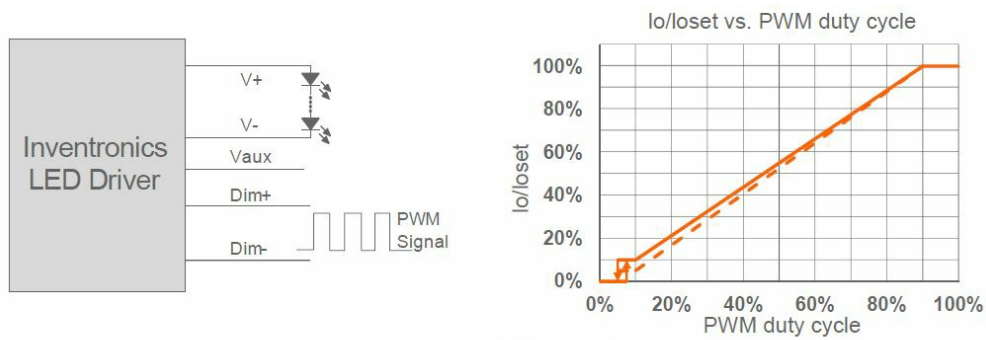


Note

1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. When PWM negative logic dimming mode and Dim+ are open, the driver will dim to off and be on standby.

Resistor Dimming

The recommended implementation of the dimming control is provided below.

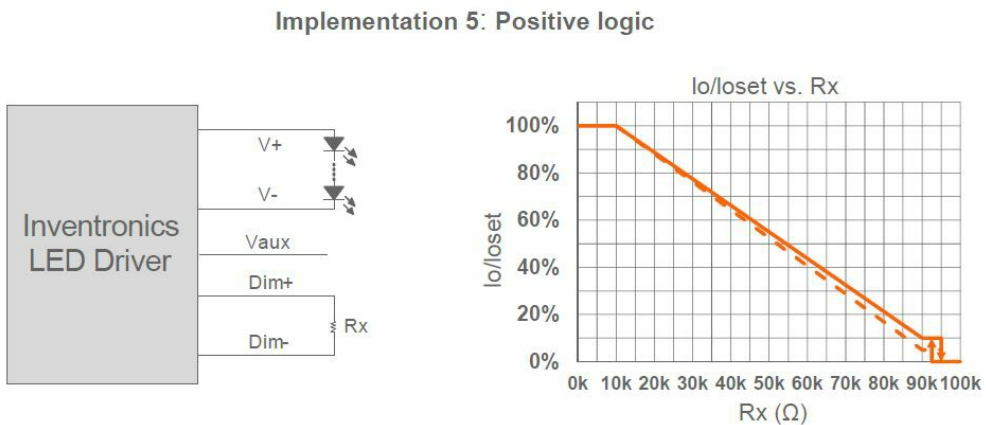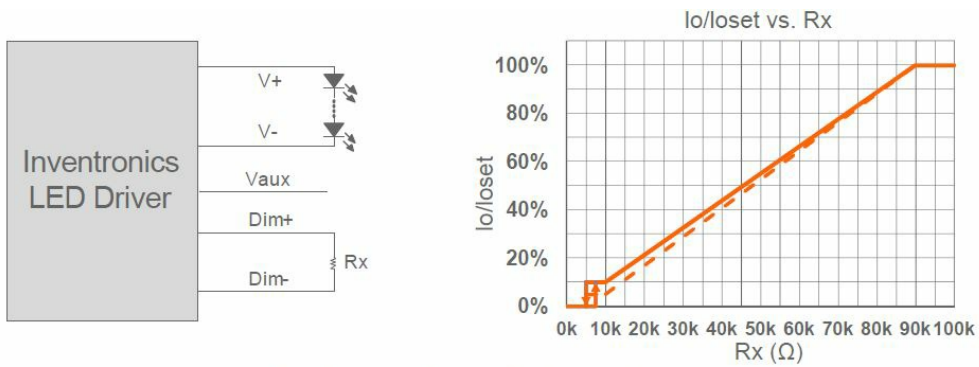


Notes

1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. When resistor negative logic dimming mode and Dim+ are open, the driver will dim to off and be on standby.

Adjustable Dimming Curve

The 0-10V dimming curve can be set as the corresponding dimming voltage by the Inventronics Multi Programmer. Take the positive logic dimming as an example, the recommended implementation of the dimming control is provided below.

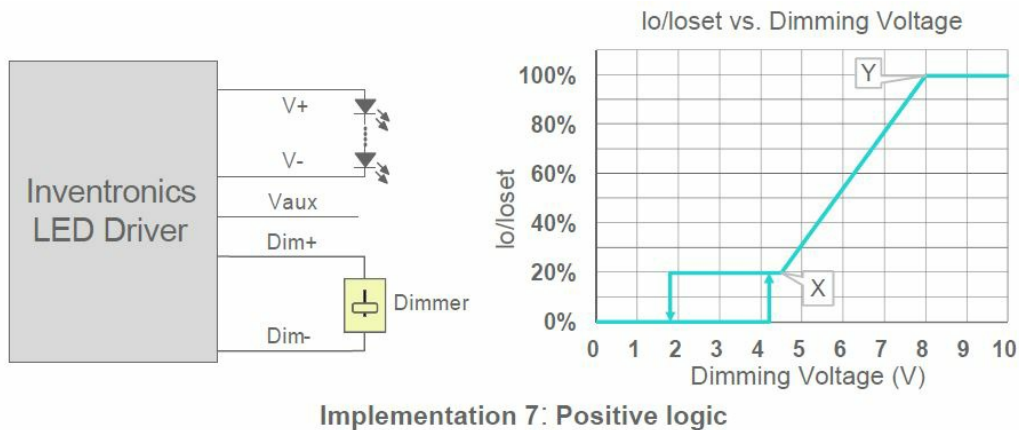

Location	Series	Rating voltage/current	PN of connector on driver	PN of mating push-lock
Vin	Wieland RST20i3	600V/10A	96.032.1055.7	96.031.0055.7 (Spring) or 96.031.4055.7 (Screw)
Vo	ALTW X-Lok,C-Size	300V/20A	CC-03PMFS-QC800P	CC-03BFMB-QL8APP
Dim	ALTW X-Lok,A-Size	300V/5A	AD-03PMMS-QC8001	AD-03BFFB-QL8AP0
Dim	ALTW X-Lok,A-Size Waterproof Cap	/	CAP-WAAMQPC1	/

Notes

1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. The dimmer can also be replaced by an active 0-10V voltage source signal or passive components like a zener.
3. When the dimming voltage X point is set to be smaller than the Y point, the dimming curve is positive logic, conversely, when the X point is set to be bigger than the Y point, the dimming curve is negative logic.
4. For best dimming accuracy, the difference between the X point and Y point is advised more than 4V.
5. Dimming off voltage adjustable.

Time Dimming

- Time dimming control includes 3 kinds of modes, they are Self Adapting-Midnight, Self Adapting- Percentage

and Traditional Timer.

- Self Adapting-Midnight: Automatically adjust the dimming curve based on the on-time of the past two days (if the difference is <15 minutes), assuming that the centre point of the dimming curve is midnight local time.
- Self Adapting-Percentage: Automatically adjusts the on-time of each step by a constant percentage = (actual on-time for the past 2 days if difference <15 min) / (programmed on time from the dimming curve).
- Traditional Timer: Follows the programmed timing curve after powering on with no changes.

Output Lumen Compensation

Output Lumen Compensation (OLC) may be used to maintain constant light output over the life of the LEDs by driving them at a reduced current when new, then gradually increasing the drive current over time to counteract LED lumen degradation. Minimum Dimming Level with 5% or 10% Selectable The minimum dimming level can be set as 5% or 10% by Inventronics Multi Programmer, 10% is default.

Hold Time Adjustable

When AC power is first applied to the LED driver, enabling a “Hold” period can allow devices powered by the Auxiliary voltage to stabilize before the driver fades up to the maximum dimming level. During this period, the driver will not respond to external dimming commands but will respond again after the hold time ends. Both the initial dimming percentage and the duration of this hold period can be adjusted by the Inventronics Multi Programmer. This function is disabled by default Fade Time Adjustable

There is a “Fade” period after the “Hold” period. The soft-start time and dimming slope applied to all dimming transitions can be adjusted individually. It is adjusted by the Inventronics Multi Programmer. This function is disabled by default.


End Of Life

End-of-Life (EOL) provides a visual notification to a user that the LED module has reached the end of manufacturer-specified life and that the replacement is recommended. Once active, an indication is given at each power-up of the driver, which the driver indicates through a lower light output during the first 1 minute before normal operation is continued.

Digital Dimming


Inventronics Digital Dimming is a UART (Universal Asynchronous Receive Transmitter) based communication protocol. Please refer to the Inventronics Digital Dimming file for details.

Programming Connection Diagram

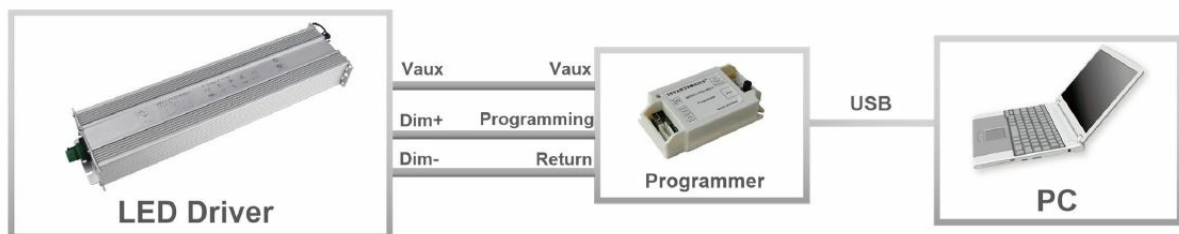

Note: The driver does not need to be powered on during the programming process. Please refer to the PRG-MUL2 (Programmer) datasheet for details.

Mechanical Outline

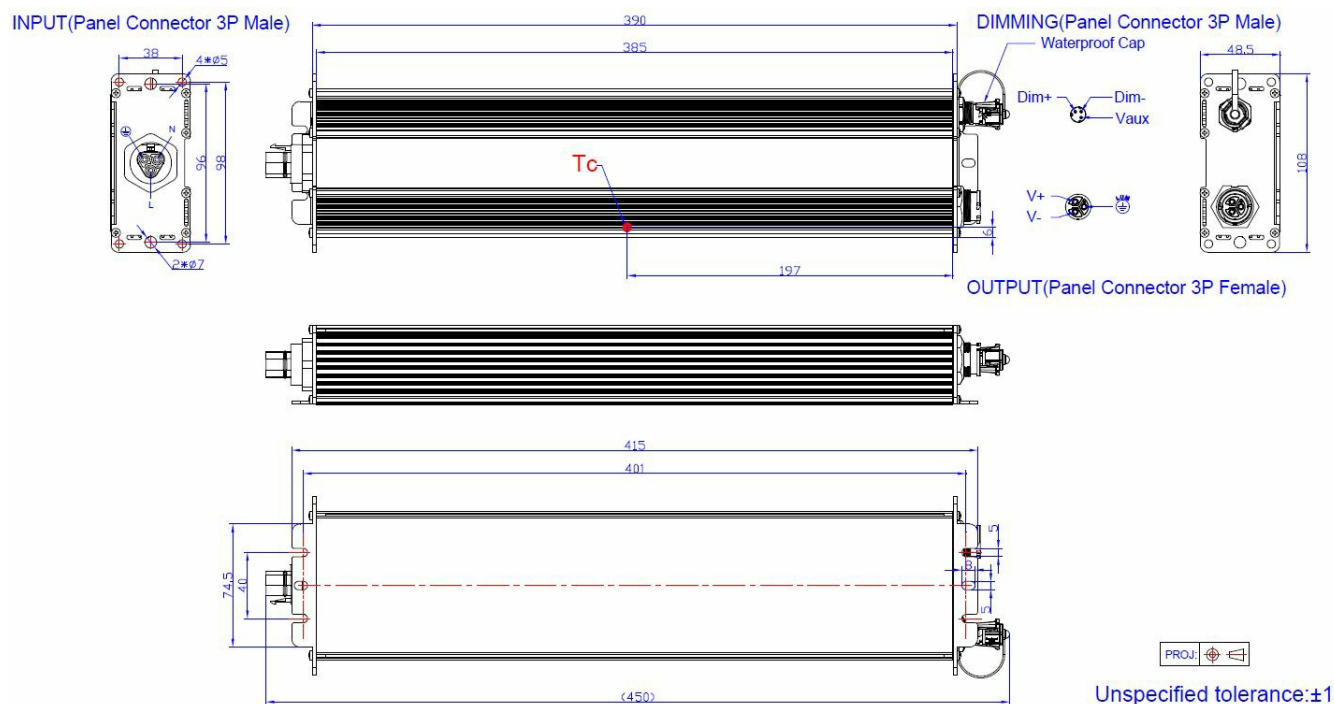

Note: This driver features UL Wet Location, and IP67 panel mount connectors to streamline wiring in the field while still supporting stringent environmental conditions. The mating push-lock is not supplied by Inventronics. Please contact Wieland and Amphenol LTW or one of their suppliers for assistance sourcing the mating pushlock

RoHS Compliance

Our products comply with RoHS Directive (EU) 2015/863 amending 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2023-01-16	A	Datasheet Release	/	/
2023-12-28	B	Format	/	Updated
		Features	/	Updated
		Inrush Current Waveform	/	Updated
		Dimming	/	Updated

Specifications are subject to changes without notice. All specifications are typical at 25C unless otherwise stated. 760W Programmable Driver SUM-760SxxxMGS Rev.B with INV Digital Dimming

www.inventronics-co.com Tel: 86-571-56565800 Fax: 86-571-86601139 sales@inventronics-co.com

	<p>DS-SUM SUM-760S15AMGS 760W Programmable Driver with INV Digital Dimming [pdf] Instructions</p> <p>SUM-760S15AMGS 760W Programmable Driver with INV Digital Dimming, SUM-760S15AMGS, 760W Programmable Driver with INV Digital Dimming, Programmable Driver with INV Digital Dimming, Driver with INV Digital Dimming, INV Digital Dimming, Digital Dimming</p>
---	---

References

- [.co.com Domain Name Registry](#)
- [1 Inventronics](#)
- [1 PRG-MUL2 - Inventronics](#)
- [1 Application Notes - Inventronics](#)
- [User Manual](#)