Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

BISupply 0647

BISupply A/C Thermostat Lock Box Instruction Manual

Model: 0647

Introduction

Thank you for choosing the BISupply A/C Thermostat Lock Box. This manual provides essential information for the proper installation, operation, and maintenance of your new thermostat lock box. Please read these instructions carefully before use and retain them for future reference.

Product Features

- **Decrease Energy Bills:** The BISupply Thermostat Cover Lock is a clear lock for air condition and heat control, designed to prevent unauthorized tampering with thermostat settings.
- **Transparent Design:** Clear plastic construction allows you to clearly see your thermostat unit and its display without obstruction.
- **Optimal Fit:** Internal dimensions of 7 x 2.1 x 4.2 inches (17.8 x 5.3 x 10.7cm) with a 1.5 x 1.25 inch (3.8 x 3.2cm) backplate wire hole. Designed to fit most standard thermostats.
- **Temperature Stability:** The outer box measures 8.5 x 2.9 x 5.6 inches (21.6 x 7.4 x 14.2cm) and is ventilated on all four sides to ensure accurate temperature detection and prevent interference.
- **Secure Locking Mechanism:** Features a key lock to secure the cover, preventing unauthorized access to thermostat controls.
- **Durable Construction:** Made from heavy-duty transparent plastic with a robust back cover.
- **Easy Installation:** Designed for straightforward mounting to the wall.

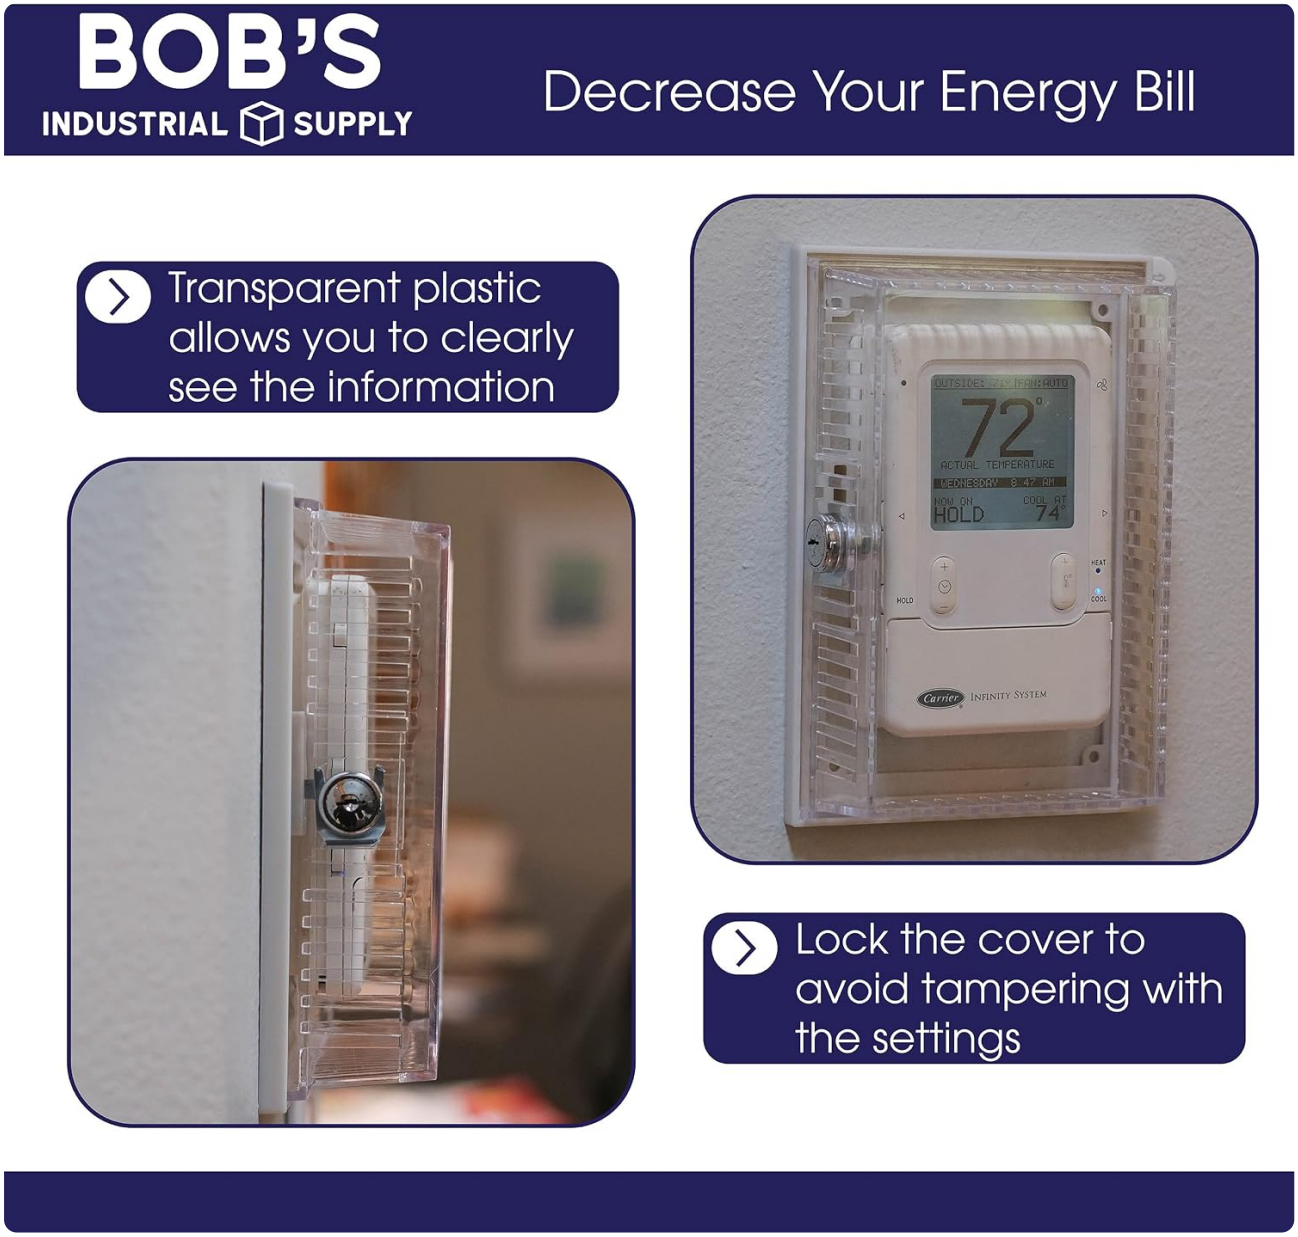

Image: The clear plastic design allows for full visibility of the thermostat, while the integrated lock prevents unauthorized adjustments.

Package Contents

Your BISupply A/C Thermostat Lock Box package includes the following items:

- 1 x Thermostat Lock Cover with Detachable Base
- 1 x Key
- 4 x Mounting Screws

Note: A Phillips screwdriver is required for installation and is not included.

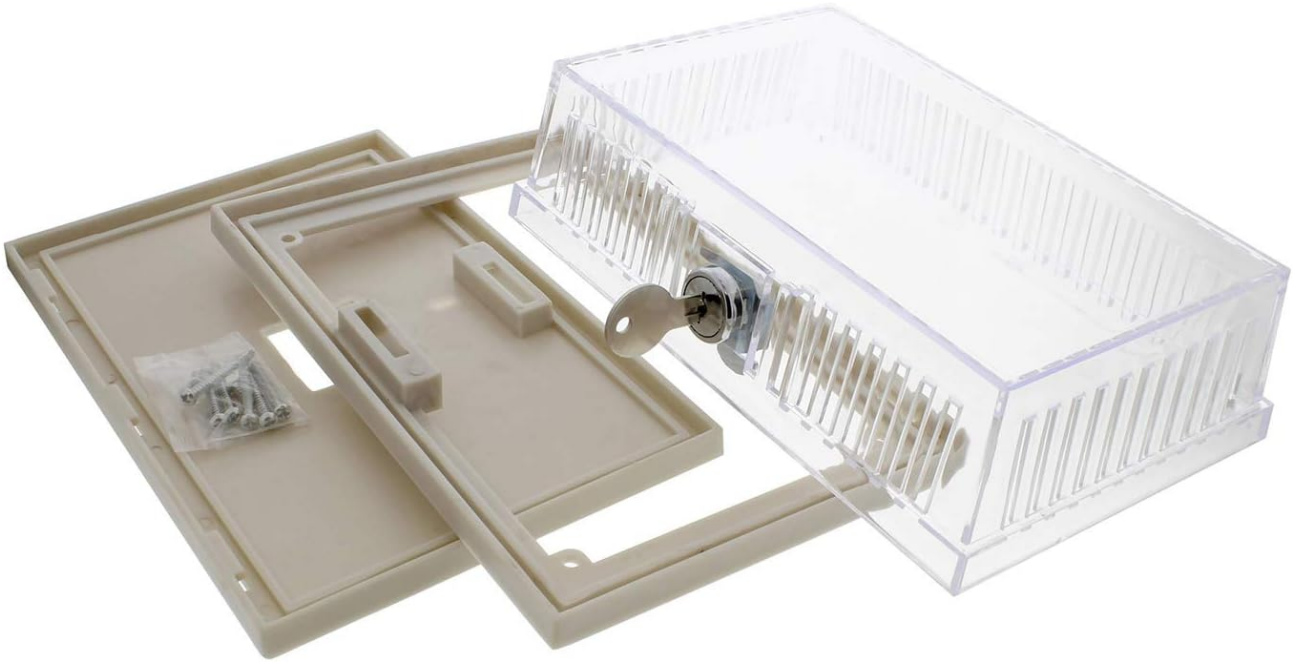

Image: All components included in the package for the BISupply Thermostat Lock Box.

Specifications

Attribute	Value
Brand	BISupply
Product Dimensions (External)	8.5"L x 2.9"W x 5.6"H (21.6 x 7.4 x 14.2cm)
Internal Dimensions (Thermostat Fit)	7"L x 2.1"W x 4.2"H (17.8 x 5.3 x 10.7cm)
Backplate Wire Hole	1.5" x 1.25" (3.8 x 3.2cm)
Color	Clear
Material	Plastic (Heavy-duty transparent)
Special Feature	Lockable, Ventilated
Mounting Type	Wall Mount
Item Weight	0.44 Pounds (7 ounces)
Model Number	0647
UPC	810009870647

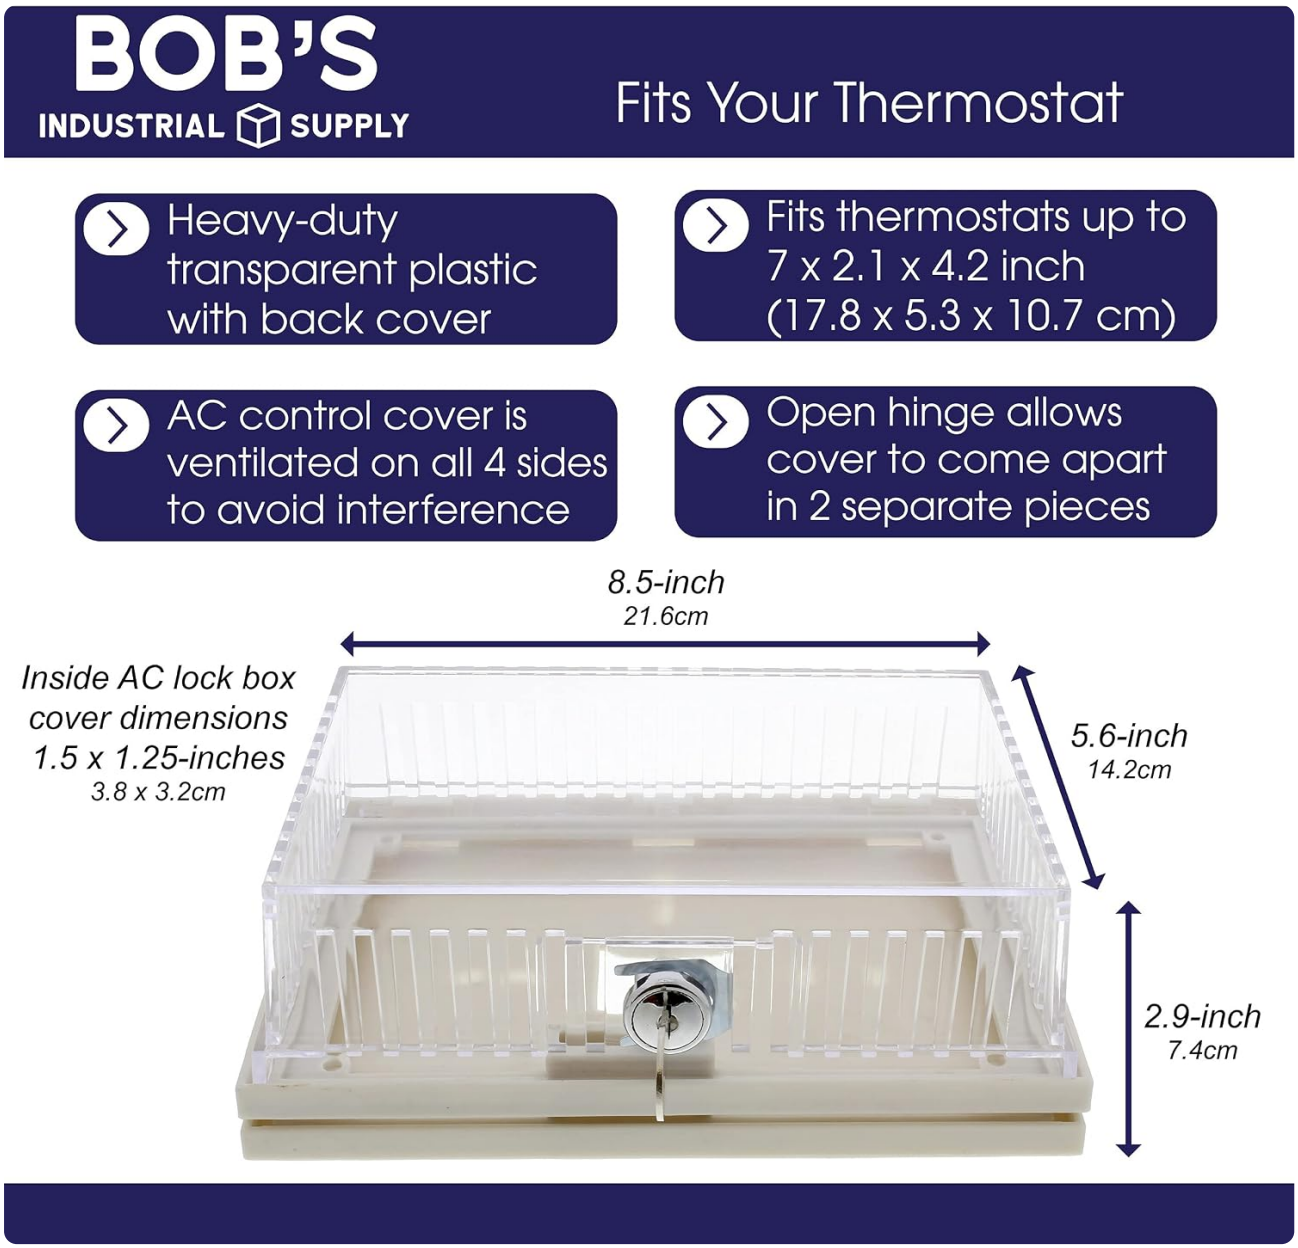

Image: Detailed dimensions of the thermostat lock box to ensure proper fit for your thermostat.

Setup and Installation

Follow these steps to properly install your BISupply A/C Thermostat Lock Box:

1. **Prepare Your Thermostat:** Ensure your existing thermostat is securely mounted to the wall and functioning correctly.
2. **Measure for Fit:** Before mounting, measure the longest side of your thermostat, including any temperature setting levers. Add approximately 1 inch (2.54 cm) to this measurement to determine if the lock box will provide a correct fit. Refer to the "Specifications" section for internal dimensions.
3. **Mount the Backplate:** Position the opaque backplate against the wall, ensuring it is level and covers the thermostat's mounting area. Mark the screw hole locations.
4. **Secure the Backplate:** Using a Phillips screwdriver (not included), attach the backplate to the wall using the provided mounting screws. Ensure it is firmly secured.
5. **Attach Thermostat to Backplate:** If your thermostat was removed, re-attach it to the newly mounted backplate. Ensure all wiring is correctly connected and the thermostat is operational.

6. **Install the Lock Cover:** Place the clear, hinged lock cover over your thermostat, aligning it with the backplate. The cover should fit snugly over the thermostat.
7. **Lock the Cover:** Insert the provided key into the lock mechanism on the side of the cover and turn it to secure the cover in place. Remove the key.



Image: The thermostat lock box installed, demonstrating its clear design and secure locking feature.



Image: Front view of the installed lock box, showing how it integrates with the wall and thermostat.

Operation

The BISupply A/C Thermostat Lock Box is designed to provide security for your thermostat settings while allowing visibility of the display. Once installed and locked, the thermostat's controls are protected from unauthorized adjustments.

- **Accessing Thermostat:** To adjust thermostat settings, insert the provided key into the lock on the side of the cover and turn to unlock. The hinged cover will open, allowing full access to your thermostat.
- **Securing Thermostat:** After making adjustments, close the cover and turn the key to lock it securely. Remove the key and store it in a safe place.
- **Visibility:** The clear plastic construction ensures that the thermostat's display and current settings remain visible at all times, even when locked.
- **Ventilation:** The ventilated design on all four sides of the box ensures that the thermostat can accurately sense the ambient temperature without being affected by the enclosure.

Maintenance

The BISupply A/C Thermostat Lock Box requires minimal maintenance to ensure its longevity and proper function:

- **Cleaning:** Wipe the clear plastic cover periodically with a soft, damp cloth to remove dust and smudges. Avoid using abrasive cleaners or solvents, as these can scratch or damage the plastic.
- **Lock Mechanism:** Ensure the lock mechanism operates smoothly. If it becomes stiff, a small amount of graphite lubricant can be applied to the keyhole.
- **Inspection:** Periodically check the mounting screws to ensure they remain tight and the box is securely attached to the wall.

Troubleshooting

Problem	Possible Cause	Solution
Cover does not close or lock properly.	Thermostat is too large for the internal dimensions of the box.	Verify your thermostat's dimensions against the product specifications. Ensure the thermostat is centered and not obstructing the cover's closure or the lock mechanism.
Key is difficult to turn in the lock.	Dust or debris in the lock mechanism; lack of lubrication.	Apply a small amount of graphite lubricant into the keyhole. Do not force the key.
Box feels loose on the wall.	Mounting screws are loose.	Tighten the mounting screws. If the issue persists, ensure the wall anchors (if used) are secure.

Warranty and Support

BISupply stands behind the quality of its products. For specific warranty information, please refer to the documentation included with your purchase or visit the official BISupply website. If you encounter any issues or have questions regarding your A/C Thermostat Lock Box, please contact BISupply customer support.

Contact Information:

Website: Visit the BISupply Store on Amazon

Manufacturer: BISupply

© 2024 BISupply. All rights reserved.

Product Model: 0647 | ASIN: B07MLH3P4S

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B07MLH3P4S

More documents and user manuals: **https://manuals.plus/**