



# DTEN D7X 75 Inch All In One Display Windows Edition User Guide

[Home](#) » [DTEN](#) » DTEN D7X 75 Inch All In One Display Windows Edition User Guide 

## Contents

- [1 DTEN D7X 75 Inch All In One Display Windows Edition](#)
- [2 Packing List](#)
- [3 What's Inside](#)
- [4 installation](#)
- [5 Setup and Enrollment with DTEN Orbit](#)
- [6 Product Diagram](#)
- [7 Mounting Instructions](#)
- [8 Specifications](#)
- [9 Safety Notice](#)
- [10 FCC Statement](#)
- [11 Japan Telec Statement](#)
- [12 Documents / Resources](#)
- [13 Related Posts](#)



## DTEN D7X 75 Inch All In One Display Windows Edition




## Packing List

1. DTEN D7X 75" x 1
2. Wall Mount Brackets x 1  
The bracket pieces are stored at the bottom of the box (beneath the foam).
3. Stylus x 1
4. Power cord x 5 (Type B,D,F,G,I)
5. USB-C to USB-C Cable x 1
6. Antenna x 2


**warning:** Do not disassemble the D7X without the supervision of a DTEN technician. Improper use may be subject to voiding the warranty.

## What's Inside

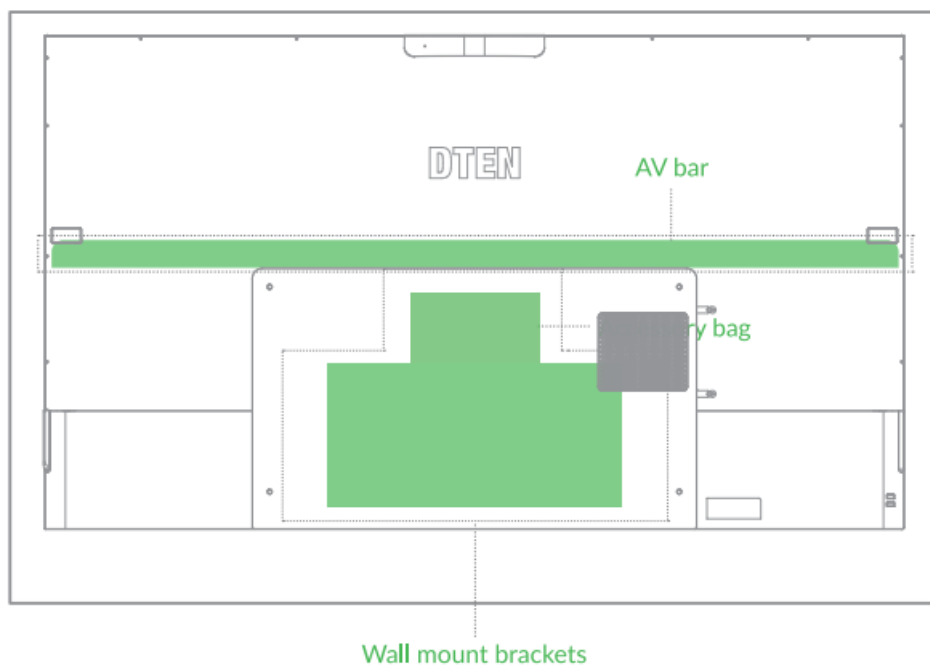


## installation

### • STEP 1

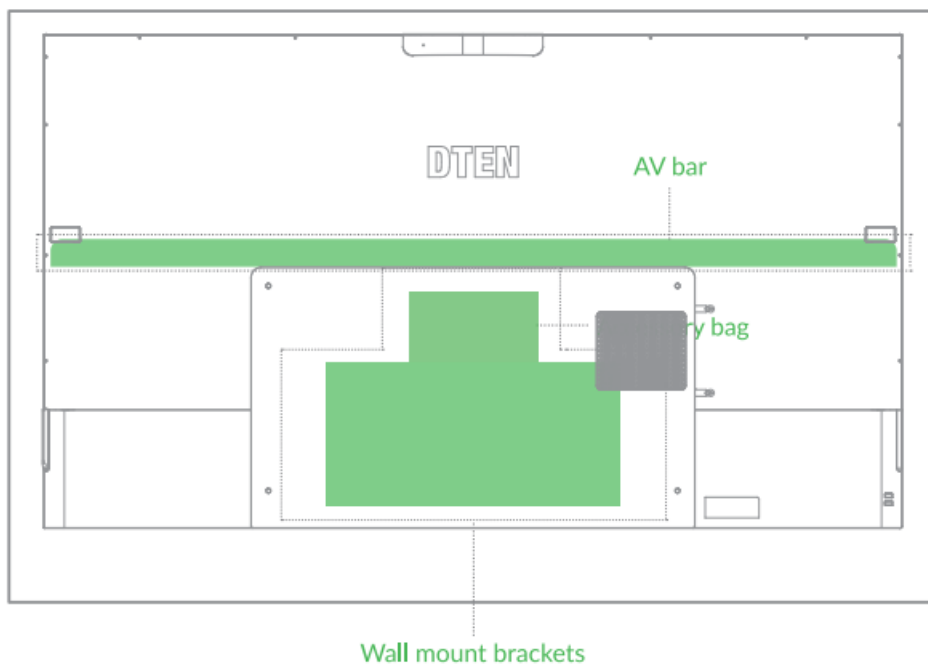


- Install the AV bar.

## • STEP 2

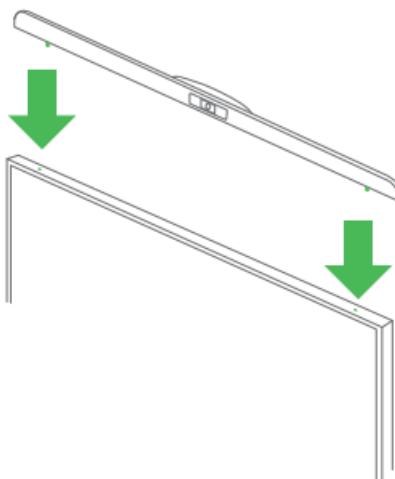


- Install the antennas.

## • STEP 3

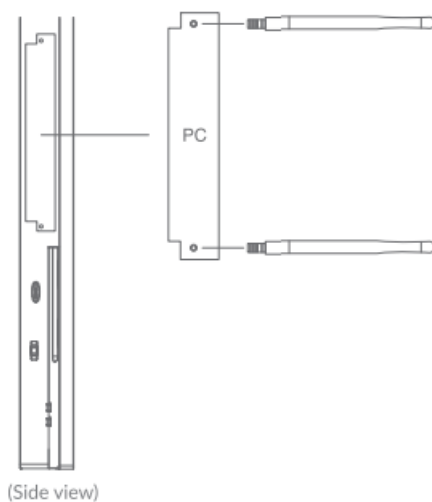

- Plug in the power cord to the outlet. The display will turn on.


#### • STEP 4

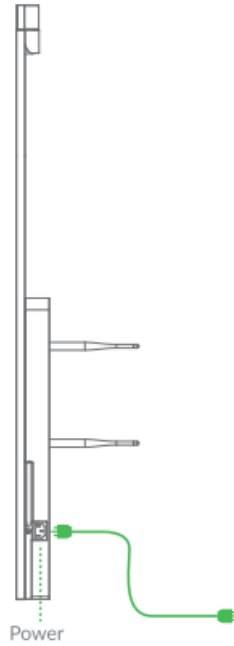

- Follow the instructions on-screen to set up the network.
- Ethernet connection is preferred.

#### BYOD Function with DTEN Smart Connect

Access the DTEN D7X camera system, microphone array, speakers and touchscreen as peripherals from an attached computer

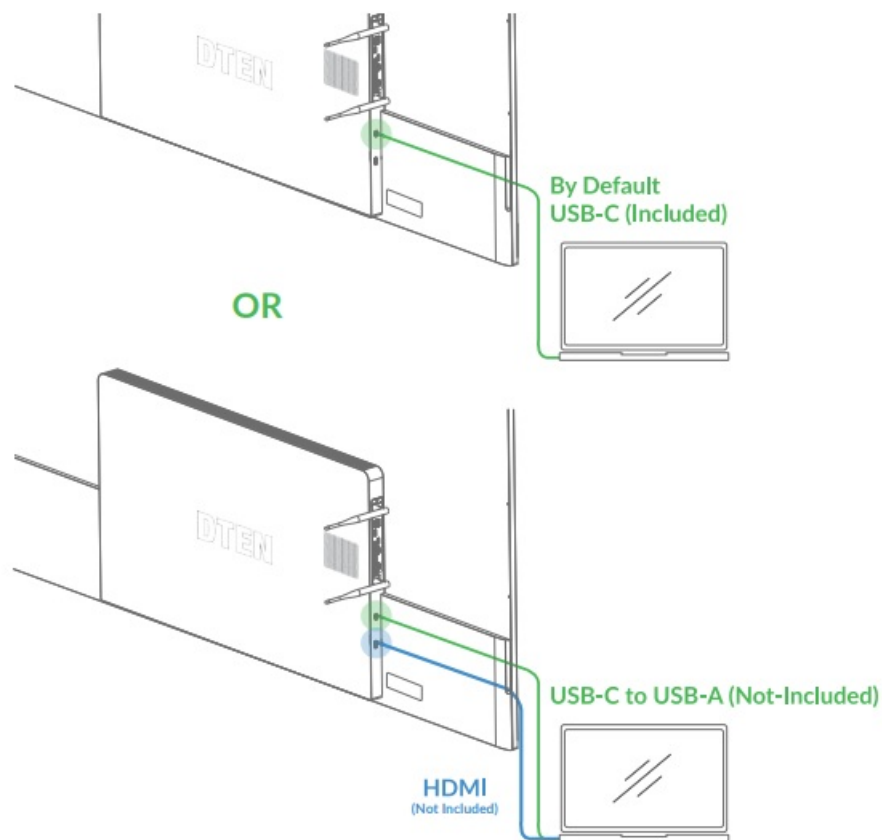

#### Setup and Enrollment with DTEN Orbit

1. The DTEN D7X may need to update to the latest version for the first-time startup. Please ensure the internet

connection is stable during startup and update process. An ethernet connection is recommended.

2. Activate and register the DTEN D7X on DTEN Orbit for device and user management services.
3. Ensure the local area network allows the DTEN D7X to be connected. Check with your network security team for instructions. Scan the QR code below for DTEN Network Whitelist Requirements.
4. The D7X requires an active software license to connect to Zoom Rooms, Microsoft Teams or other VC providers' software. For more information, visit the service provider's website.



DTEN Network  
Whitelist Requirements




Zoom Rooms Overview


## Tips

1. An ethernet connection is preferred for the best meeting experience.
2. Please do not disconnect the power without first properly shutting down the D7X.
3. Do not attempt to disassemble the DTEN D7X without the instruction of a certified DTEN service provider.  
Unauthorized disassembly or service may void your warranty.
4. The D7X is compatible with many meeting room controllers, document cameras, audiovisual systems and other 3rd party peripherals. Consult the respective manufacturer instructions for setup and pairing information.


## Product Diagram

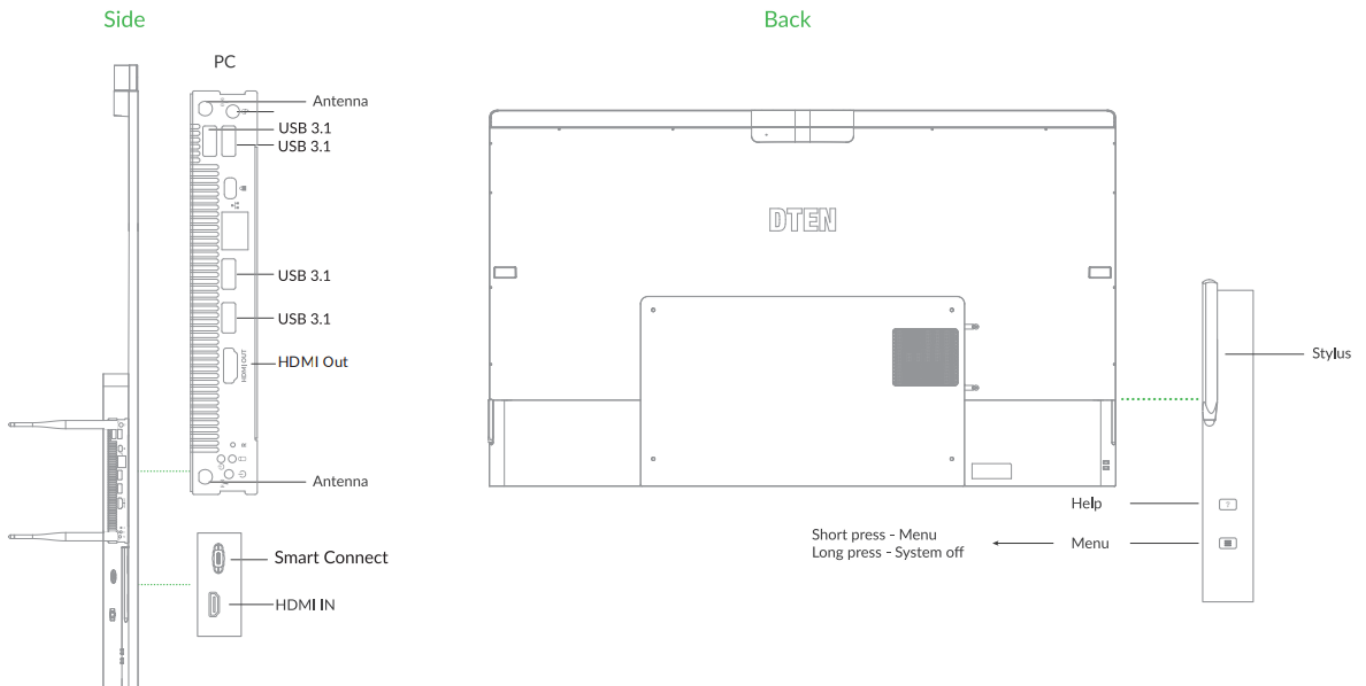

## Mounting Instructions

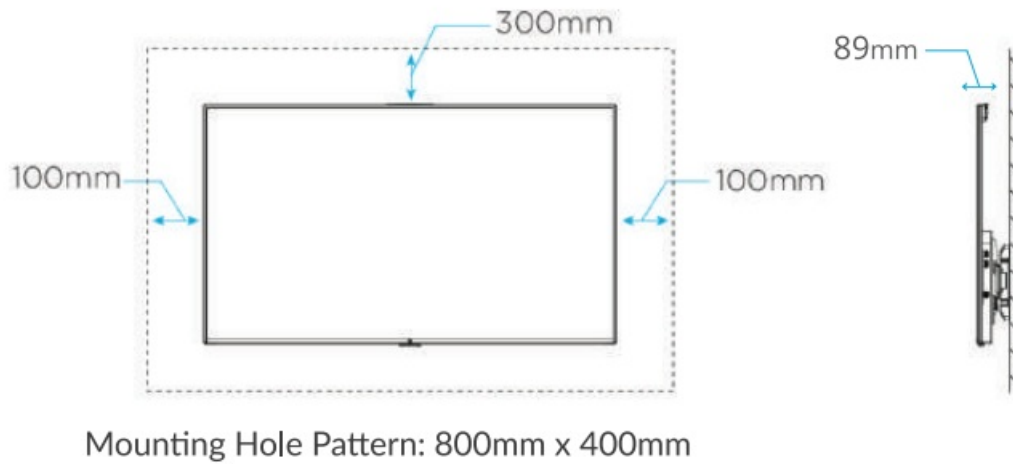

### Mounting Hole Pattern: 800mmx 400mm

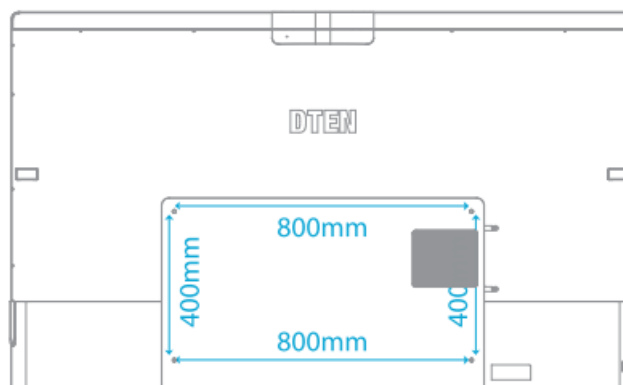

## Specifications

### Model D7X 75"

- **VESA:** 400 mmx 800 mm
- **Standard Screw:** 6.0 mm x 18 mm
- **Number of Screws:** 4 pcs

**Note:** Contact a professional for assistance when wall mounting your display. We are not responsible for any damage to the product or injury to yourself.  
Do not power on the display when performing wall mount installation. It may cause personal injury due to electric shock

## Safety Notice

- Do not use the power supply beyond the specification.
- Do not place the display on an unstable area or inclined surfaces. Otherwise, the display may fall over or this may result in fire.
- Do not put the display under direct sunlight, Superheated or dusty environment, environment with flammable Substances stored or used;
- Do not use damaged or improper receptacles so as to guarantee good contact between the plug and socket.
- Do not attach dust or metal substances to the power plug or socket.

- Do not damage the power cord; do not reht the power cord; do not put heavy objects on the power cord; keep the power cord away from the heat source; do not pull power cord while taking it off.
  - Do not connect too many power plugs in a socket. Otherwise. this may cause fire owing to power overloading
  - Do not put naked Tlame (such as turned candle close to the display. Otherwise, this may cause an electric shock or a hre hazard.
  - Do not touch the plug with moisture nand. Otherwise, this may result in electric shock. Keep product away Trom dripping or sprinkling
  - Do not use expose the display to rainstorms especially thunders torm. Disconnect the power supply and antenna plug to prevent lightning stroke.
  - Do not disassemble, repair or modify the display at your own discretion. You may be injured by electric shock or fire. All repairs must be performed by qualified service personnel.
  - In case of the following conditions
    - Power failure or unstable voltage.
    - Abnormal sound or smell from the display.
  - The AC power cord is damaged. display is damaged owing to falling, knocking or bumping.
    - Any liquid of foreign object dropped into the display.
  - Immediately turn off the display and unplug the power plug from receptable, contact authorized professional personnel for repairing.
  - Make sure that children do not climb on the display.
  - Keep the small parts out of the reach of children, to preven accidently swallowed.
  - Do not put vase of other containers filled with fluid on the display.
  - If the display is not used for a long period of time such as a travel, power off the display and unplug the power plug
  - Unplug the power plug first before cleaning the display. Use soft cloth without industrial cleaner. Avoid foreign object drop into the display.
  - If it is required to adjust the position or angle of the display, unplug the power plug and move it slowly to preven the display from dropping.
- Disconnecting device description: as the disconnecting device, power plug cannot be covered. It must be maintained at convenient operation status. Do not scrub or knock
- LCD with hard substance, or do not distort or squeeze LCD.
  - If LCD is damaged and liquid is splashed to skin, flush skin with fresh water for 15 minutes and consult your doctor immediately.
  - When you move the display by hand, hold four corners at the bottom of the display, do not apply excessive force to the panel.
  - Do not display still image (mark, video game, computer video, electronic text, 4:3 mode display image and other images for more than 2 hours (time may differ with different servie conditions of the display. The warranty does not cover the permanent rention of image.
  - Ways to watch display healthily:watch display under proper light. If you water display under insufficient light for long time, it may affect your vision. When you use earphones, adjust the volume level at first protect your hearing from super high volume.
  - There is a risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.

- Batteries (battery pack or batteries installed) shall not be exposed to excessive heat such as sunshine, fire or the like.
- Do not put or store inflammable substances near the display.
- Do not expose the display to dripping or splashing, and ensure that no object filled with liquid, such as vases, are placed on the display.
- In case of leakage of gas or other inflammable gases, do not plug or unplug power plug of display or other electric appliances. Turn off the gas supply and open the windows immediately.
- Do not place display on an unstable surface. The display may fall over, cause serious personal injury or death. May injuries, particularly to children, can be avoided by taking simple precautions such as:
  - Using cabinets or stands recommended by the manufacturer of the display.
  - Only using furniture that can safely support the display.
- Ensuring the display is not overhanging at the edge of the furniture.
- Not placing the display on the tall furniture (e.g. cupboard or bookshelf) without anchoring both the furniture and the display to a suitable support.
- Not placing the display on cloth or other materials that are located between the display and furniture.
- Educating children about the dangers of climbing on furniture to reach the display or its controls.
- If your existing display will be retained and relocated, the above considerations should be applied. Hereby, Goertek, Inc, declares that this LED display/ L434FCNN is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.
- This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.
- Notification of the intent to market the device to EU member states may be necessary due to the restrictions in use in certain countries.
- Operations in the 5GHz band is restricted to indoor usage only.
- If a display is not positioned in a sufficiently stable location, it can be potentially hazardous due to falling. Many injuries, particularly to children, can be avoided by taking simple precautions such as:
  - Using cabinets or stands recommended by the manufacturer of the display.
  - Only using furniture that can safely support the display.
  - Ensuring the display is not overhanging the edge of the supporting furniture.
  - Not placing the display on tall furniture (for example, cupboards or bookcases) without anchoring both the furniture and the display to a suitable support.
- Not standing the display on cloth or other materials placed between the display and supporting furniture.
- Educating children about the dangers of climbing on furniture to reach the display or its controls.
- Altitude during operation (m): less than 5000m.
- The lightning flash with arrowhead symbol, within an equilateral triangle is intended to alert the user to the presence of uninsulated dangerous voltage within the product enclosure that may be of sufficient magnitude to constitute a risk of electric shock.
- The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

- Main plug is used as the disconnect device, the disconnect device shall remain readily operable.
- Install information: Standard: Screw: 06 mm x 12 mm, height: no limit
- Comply with the notes in the operating instructions
  - Replacement of a battery with an incorrect type that can defeat a safeguard;
  - Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion;
  - Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas; and
  - A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.
- The apparatus shall be connected to a MAINS Socket outlet with a protective earthing connection

## **FCC Statement**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/display technician for help.

## **FCC Radiation Exposure Statement**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

## **Japan Telec Statement**

- 5.3 GHz band is restricted to indoor use due to the Radio Law
- 5.2 GHz band is restricted to indoor use only (Except when communicating with 5.2GHz high power base stations or relay stations)

**Operating Temperature:** 0°C to 40°C

## Toxic/Hazardous Substance/Element in the Product

Component	Toxic and Hazardous Substance or Element					
	(Pb)	(Hg)	(Cd)	(Cr <sup>6+</sup> )	(PBB)	(PBDE)
Display screen	×	○	○	○	○	○
Housing	○	○	○	○	○	○
PCBA*	×	○	○	○	○	○
Power cord and cables	×	○	○	○	○	○
Metal parts	○	○	○	○	○	○
Packing materials*	○	○	○	○	○	○
Remote control	×	○	○	○	○	○
Speaker	×	○	○	○	○	○
Accessories*	○	○	○	○	○	○

This label has been prepared in accordance with SJ/T11364.

- PCBA includes the PCB and its electronic components  
Packing materials include the carton, EPS, etc.  
Other accessories include the User's Manual, etc.
- The content of such toxic/hazardous substance in all homogeneous materials of such component falls within the content limit specified in GB/T26572-2011.
- The content of such toxic/hazardous substance in one or more homogeneous materials of such component goes beyond the content limit specified in GB/T26572-2011.

As shown in the above table prepared based on the data provided by our material suppliers for each type of materials and verified by us, this product contains hazardous substances. The hazardous substances contained in some materials are irreplaceable at the current technological level although we've been trying to make improvements.

The environment-friendly use period of this product is 10 years (see the pollution control symbol in the right figure). Such use period will be maintained under the normal working conditions specified in the User's Manual only.

Indicative Description of Regulations on Recycling and Disposal of Waste Electrical and Electronic Products. To care for and protect the earth better, please send it to a local manufacturer with nationally recognized qualification for recycling according to the national applicable laws and regulations on recycling of waste electrical and electronic products when you no longer need this product or at the end of its service life.

**warning:** As a Class-B product, it may produce radio interference in living environments. In such cases, using an additional power plug as the make and break device will be a practical way to restrain interference.

### Important Statement on Network Service

All contents and services obtained from the product are owned by third parties and protected by copyright, patent, trademark and

/or other intellectual property laws. These contents and services are only for your personal non-commercial purposes, which shall

not be used in a way not authorized by the content owner or service provider

Under no circumstances shall our company be liable for any direct, indirect or unexpected losses or damages arising from your or

any third party's access to any contents or services or any information or third-party software through this product. Third-party services may be subject to change, removal or discontinuation without prior notice. Our company does not represent or

warrant that some services or contents will remain accessible at any time.

Our company will not be responsible for any service related to these contents and services, or assume any liability

for customer service. For any question or service request about these contents and services, please directly contact your content or service provider.

**Disclaimer**

When any of the following cases occurs, the company does not guarantee the liability of free maintenance.


1. Product damages caused by violating the user guidance.
2. Hardware damages caused by improper assembly.
3. Product damages caused by unauthorized modification or maintenance.
4. Product damages caused by using in unpermitted environment.
5. Product damages caused by abnormal external force.
6. Product damages caused by natural disasters or other force majeure.
7. Privately tear off or damage disassembly tabs
8. Unable to provide effective purchase certificate.
9. The warranty will be voided if DTEN assesses any of the following cases have occurred.
10. Do not disassemble the DTEN product without the supervision of a DTEN technician.

The content in this document is for reference only. Content is subject to change without notice. For most updated information, please visit [dten.com](https://dten.com).

**Singapore safety information**

- Before using this product, ensure that all cables are correctly connected. If you detect any cable damage, contact your retailer immediately.
- Use this product only with the correct voltage as instructed by the manufacturer.
- To avoid short circuits and faulty contacts, keep scraps of paper, screws, and threads away from connectors, slots, sockets, and circuits.
- Before adding or removing devices to or from the system, ensure to unplug it from the power source.
- The system covers are elaborately designed to protect users from scratches, but still be careful with those sharp tips and edges. Put on a pair of gloves before removing or replacing the system covers.
- If you encounter technical problems with this product, e.g. the power supply is broken, contact a qualified service technician or your retailer. DO NOT service this product yourself.

**Documents / Resources**

	<a href="#">DTEN D7X 75 Inch All In One Display Windows Edition</a> [pdf] User Guide DB71475, 2AQ7Q-DB71475, 2AQ7QDB71475, D7X 75 Inch All In One Display Windows Edition, D7X, 75 Inch All In One Display Windows Edition, All In One Display Windows Edition, Display Windows Edition, Windows Edition
---	---