

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

> [papasbox](#) /

> [papasbox 50W LED Floodlight - IP65 Waterproof - 6000K Cool White User Manual](#)

papasbox Z000718

papasbox 50W LED Floodlight - IP65 Waterproof - 6000K Cool White User Manual

Model: Z000718

INTRODUCTION

Thank you for choosing the papasbox 50W LED Floodlight. This manual provides essential information for the safe installation, operation, and maintenance of your floodlight. Please read it thoroughly before use and retain it for future reference.

This LED floodlight is designed for both indoor and outdoor applications, offering bright, energy-efficient illumination with a cool white light (6000K). Its robust IP65 waterproof rating and durable construction ensure reliable performance in various weather conditions.



Image: The floodlight's tempered glass lens, highlighting its robust design.

SAFETY INFORMATION

- Always disconnect power before installation, maintenance, or cleaning.
- Installation should be performed by a qualified electrician or competent person.
- Ensure the power supply voltage matches the floodlight's requirements (230 Volts).
- Do not look directly into the LED light source when it is illuminated, as it may cause eye strain.
- Ensure the mounting surface is strong enough to support the weight of the floodlight.
- Do not modify the product in any way. Unauthorized modifications may void the warranty and pose safety risks.
- Keep away from flammable materials.
- The floodlight is non-dimmable. Do not connect to a dimmer switch.

PACKAGE CONTENTS

Verify that all components are present and undamaged:

- 1 x papasbox 50W LED Floodlight (Model: Z000718)
- Integrated EU Plug with Electric Cable
- Mounting Bracket (pre-attached)
- User Manual (this document)




Image: The papasbox 50W LED Floodlight with its integrated EU plug and cable.

SPECIFICATIONS

Feature	Specification
Brand	papasbox
Model Number	Z000718
Power	50 Watts
Luminous Flux	5000 lm
Color Temperature	6000 Kelvin (Cool White)
Voltage	230 Volts
Beam Angle	120 Degrees

Feature	Specification
Waterproof Rating	IP65
Material	Aluminum, Tempered Glass
Product Dimensions (L x W x H)	17.9 x 14 x 3.7 cm
Item Weight	640 g
Special Features	Non-dimmable, Excellent Heat Dissipation
Energy Efficiency Class	F (View EPREL data)

Product Size



High quality chip



Waterproof



Efficient heat dissipation



High brightness



Safe and reliable

Image: Diagram illustrating the product dimensions.

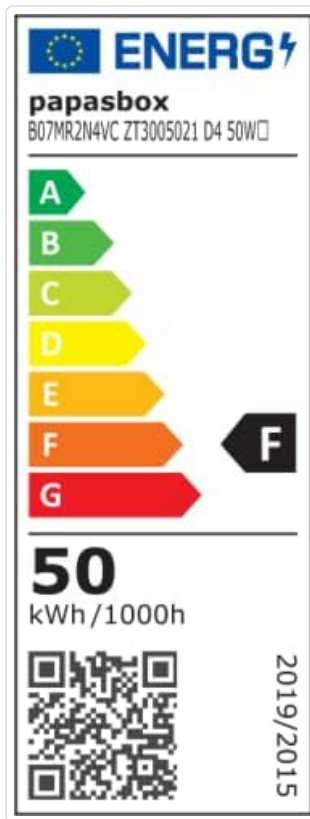


Image: EU Energy Label indicating energy efficiency class F.

SETUP AND INSTALLATION

The papasbox LED Floodlight is designed for easy installation. Ensure all safety precautions are followed before proceeding.

Components Overview

High-Grade components

50W, new outdoor light, structure decomposition



Epistar Chip



5000lumen



Waterproof
IP65



Pit fall prevention

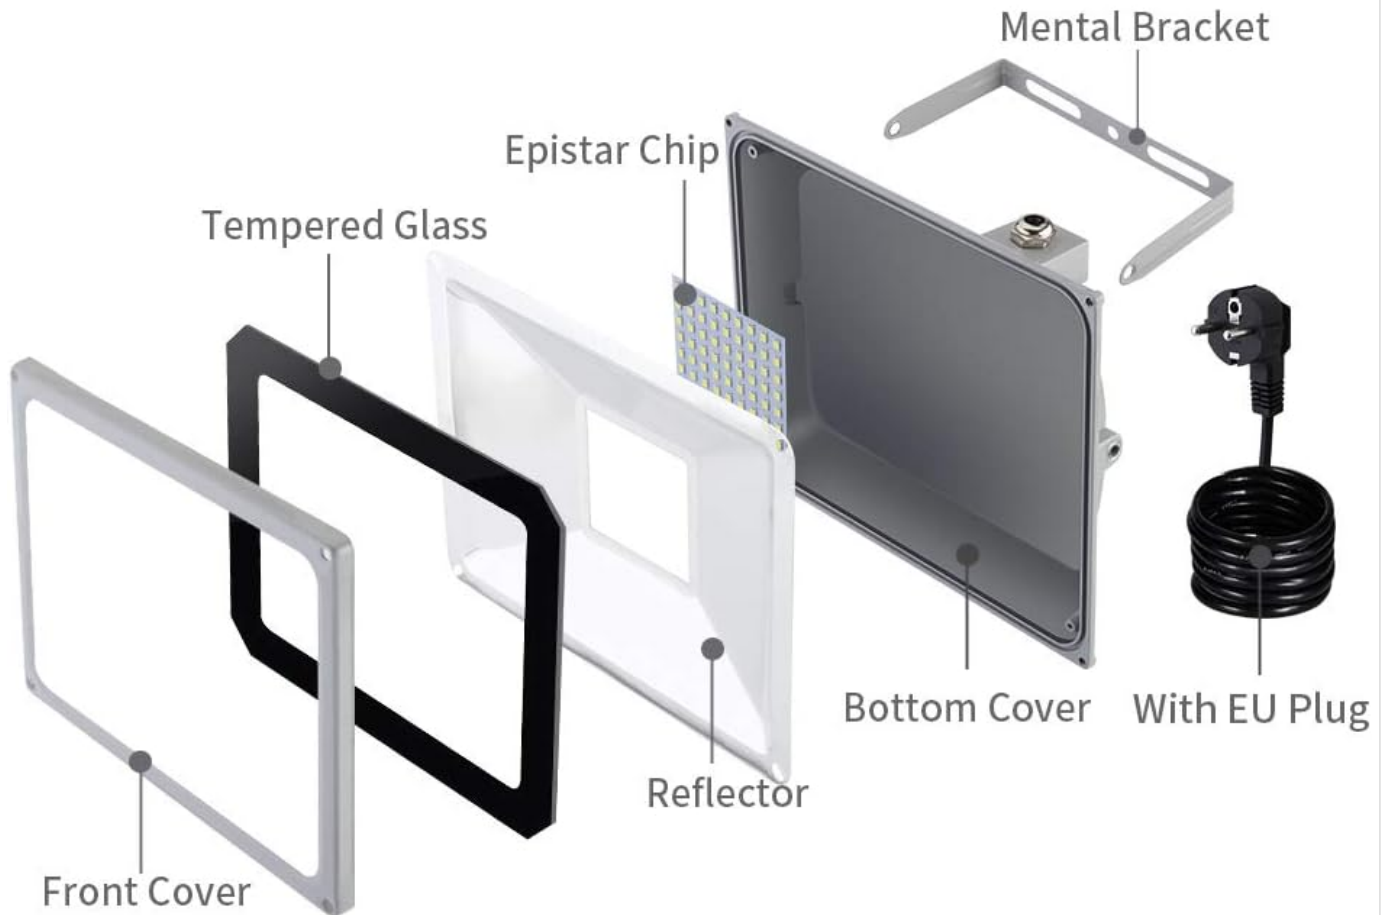


Image: Exploded view illustrating the internal and external components of the floodlight.

Mounting Options

The integrated metal bracket allows for versatile mounting. The lamp body can be adjusted up to 180 degrees to direct the light as needed.

1. **Wall Mounting:** Secure the bracket to a vertical surface using appropriate screws (not included).
2. **Pedestal Mounting:** Attach the bracket to a horizontal surface or a pole.
3. **Ceiling Mounting:** Fasten the bracket to an overhead structure.

Product Installation Instructions



Image: Visual guide for wall, pedestal, and ceiling mounting options.

Electrical Connection

The floodlight comes with a pre-attached EU plug. Connect it to a suitable 230V power outlet. Ensure the connection is secure and protected from moisture, especially for outdoor installations.



Image: The floodlight demonstrating its IP65 waterproof capabilities in wet conditions.

OPERATING INSTRUCTIONS

Once installed and connected to power, the floodlight will illuminate when power is supplied. It is a simple on/off operation via the power source.

- **Power On/Off:** Control the floodlight using the wall switch or power outlet it is connected to.
- **Adjusting Beam Angle:** Loosen the screws on the side of the mounting bracket, adjust the lamp body to the desired angle (up to 180°), and then tighten the screws securely.

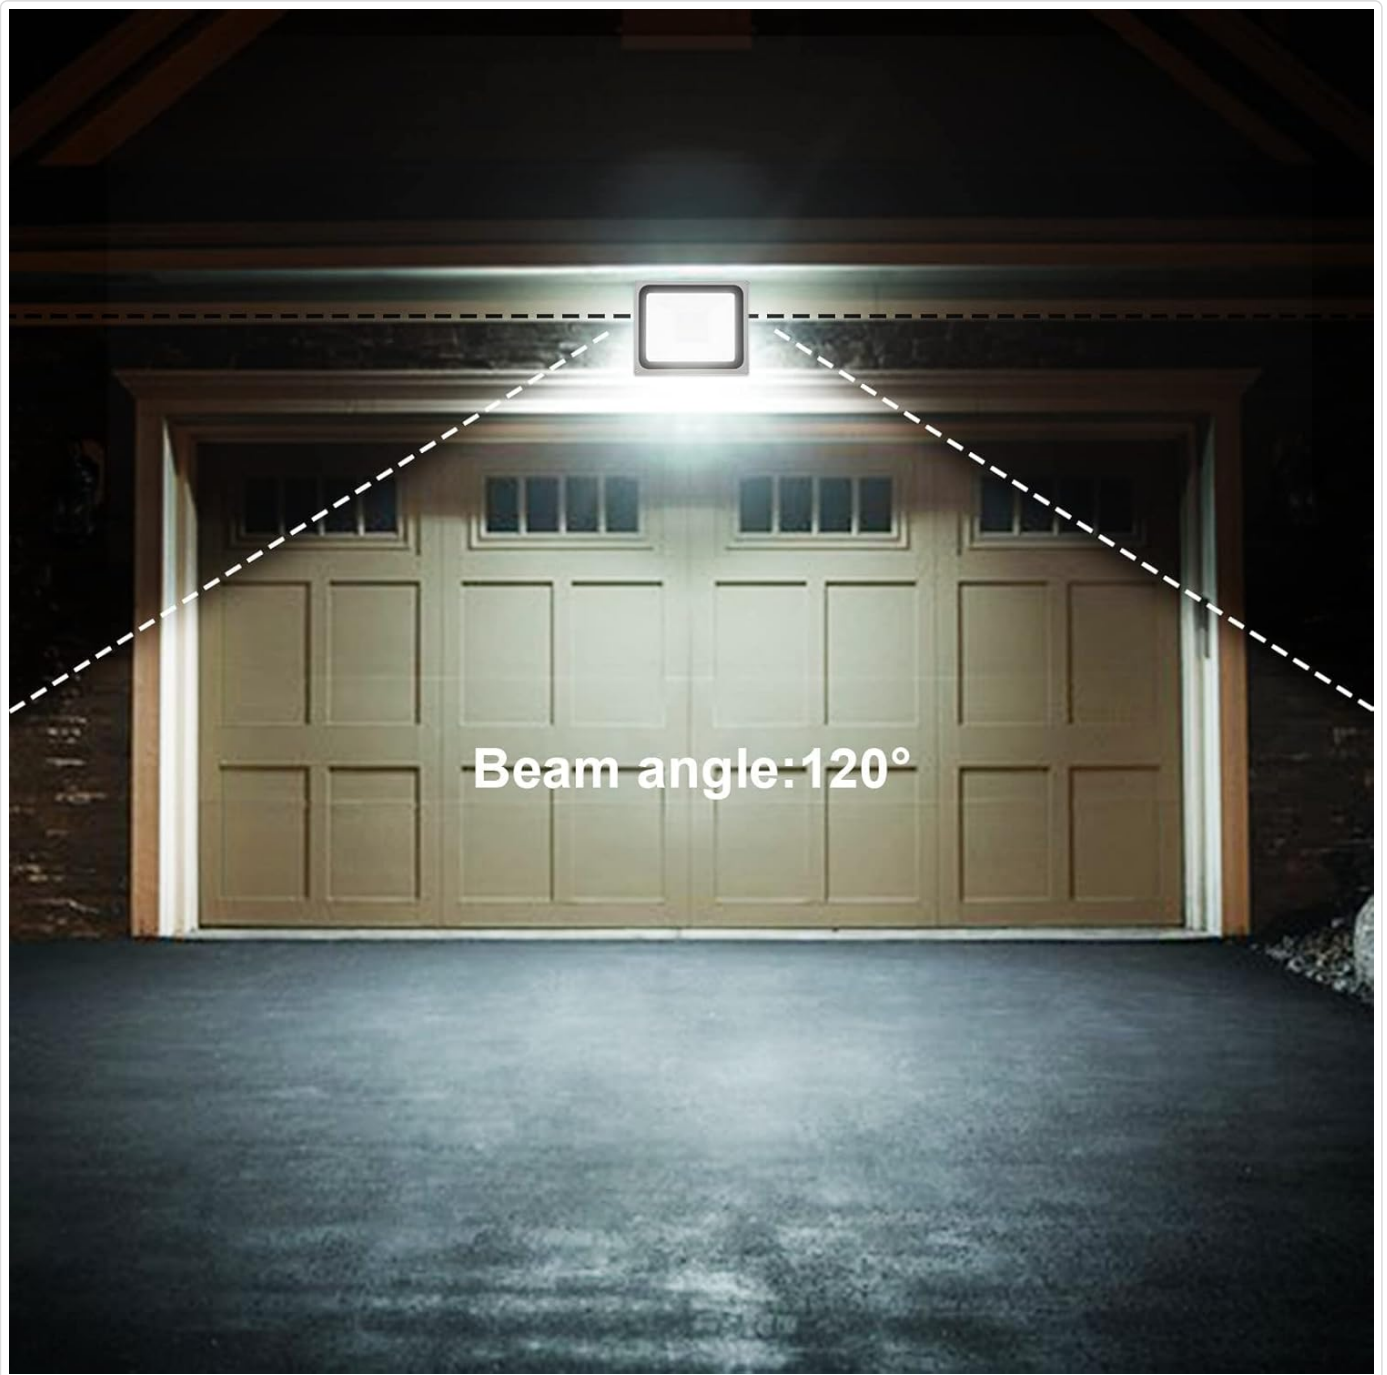


Image: Depiction of the 120-degree wide beam angle.

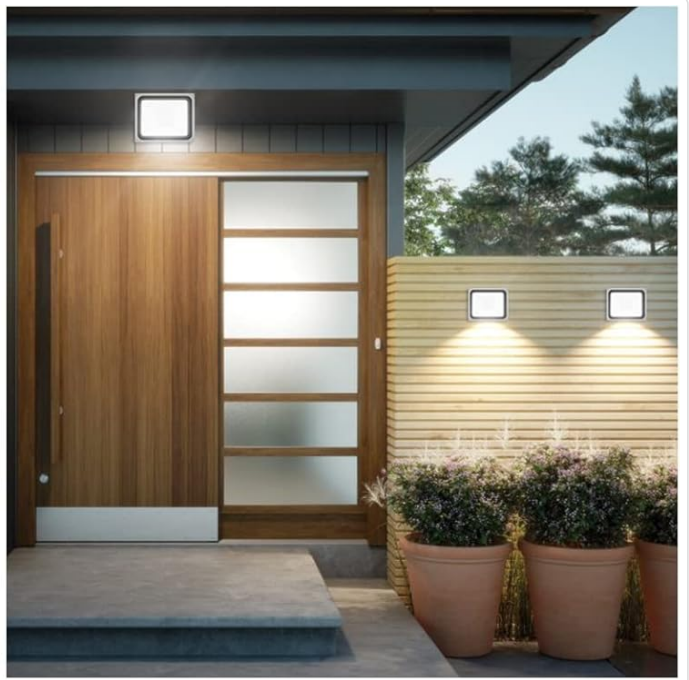


Image: Examples of the floodlight in different outdoor settings.

MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your floodlight.

- **Cleaning:** Disconnect power before cleaning. Wipe the floodlight's surface with a soft, damp cloth. Do not use abrasive cleaners or solvents.
- **Inspection:** Periodically check the power cable and housing for any signs of damage. If damage is found, discontinue use and consult a qualified technician.
- **Heat Dissipation:** Ensure the cooling fins on the back of the floodlight are free from dust and debris to maintain efficient heat dissipation.



Image: Illustration of the floodlight's heat dissipation design.

TROUBLESHOOTING

If you encounter issues with your floodlight, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	No power supply, loose connection, faulty outlet.	Check power connection, ensure outlet is functional, verify switch is on.
Light flickers.	Unstable power supply, loose wiring.	Check power source stability, ensure all connections are tight.
Reduced brightness.	Dirt or debris on the lens.	Clean the lens with a soft, damp cloth (ensure power is off).
Overheating.	Poor ventilation, obstructed cooling fins.	Ensure adequate airflow around the floodlight; clear any obstructions from cooling fins.

If the problem persists after trying these solutions, please contact customer support.

WARRANTY AND SUPPORT

This product is covered by a standard manufacturer's warranty. Please refer to your purchase documentation for specific warranty terms and conditions.

For technical support, warranty claims, or any other inquiries, please contact papasbox customer service through the retailer where the product was purchased.