



echoflex ERUSB-S USB Serial Interface Installation Guide


[Home](#) » [echoflex](#) » echoflex ERUSB-S USB Serial Interface Installation Guide 

Contents


- [1 echoflex ERUSB-S USB Serial Interface](#)
- [2 Overview](#)
- [3 Prepare for Installation](#)
- [4 Installation](#)
- [5 Project Management](#)
- [6 Compliance](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)



echoflex ERUSB-S USB Serial Interface

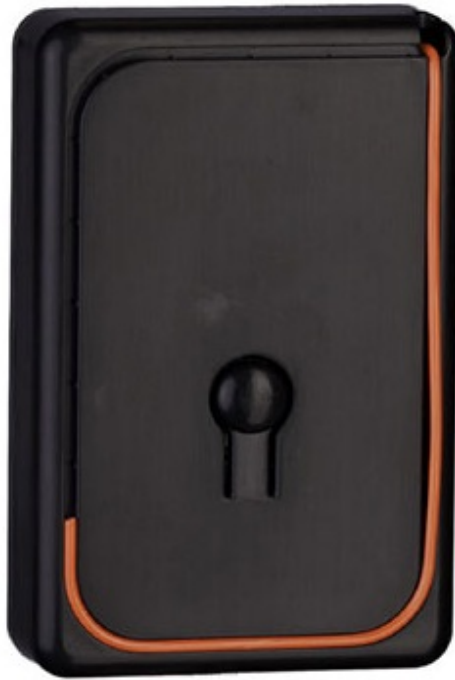

Overview

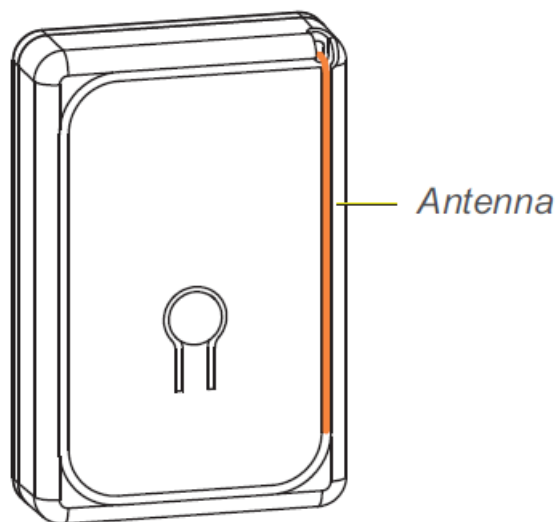

The USB Serial Interface (ERUSB-S) acts as an interface between PC-based applications and the wireless activity of Echoflex transmitters and receivers. Technicians and commissioning agents can manage and configure wireless projects as well as monitor transmissions to troubleshoot reception issues from a laptop on-site. This document covers installation and operation. The product package includes the interface and a 1 m (3.2 ft) USB 2.0 cable (type A to type mini-B).

Prepare for Installation

To ensure optimal function, consider the installation environment and the following guidelines:

- For indoor use only. Operating temperature -25°C to 65°C (-13°F to 149°F), 5%–92% relative humidity (non-condensing).
- High-density construction materials and large metal appliances or fixtures in the space may disrupt wireless transmissions.
- Use the interface within range of wireless transmitters and receivers, 24 m (80 ft).

- Use the mobile nature of the interface connected to a laptop computer to move and stay within range of radio reception.

Corporate Headquarters Middleton, WI, USA | +1 608 831 4116 Web echoflexsolutions.com | Email info@echoflexsolutions.com | Support service@echoflexsolutions.com ©2022 Echoflex Solutions, Inc. Trademark and patent info: echoflexsolutions.com/ip Product information and specifications are subject to change. Echoflex intends this document to be provided in its entirety. 8188M2122 Rev A Released 2022-09

Installation

The ERUSB-S is powered through a USB port.

1. Plug the mini-B end of the USB cable into the ERUSB-S and the other end into a computer USB port. If necessary, download the correct driver files at www.ftdichip.com/Drivers/VCP.htm. The computer will then recognize the ERUSB-S and create a virtual serial COM port.
2. Launch the software application you plan to use with the USB-S.
 - Garibaldi Pro commissioning software to manage wireless projects (available for download at echoflexsolutions.com).
 - DolphinView monitoring software to analyze radio signal traffic and controller memory (available for download from EnOcean Alliance).
3. Select the COM port associated with the ERUSB-S and click the Connect button in the software. The USB-S can now receive all transmitted messages within range.
4. Use double-sided tape or Velcro® (not provided) to mount the ERUSB-S, if required.

Note: The button on the front of the USB-S is disabled and has no effect on operations.

Project Management

When used with Garibaldi Pro, the ERUSB-S provides access to radio signals so you can setup, test, and maintain wireless projects. The USB-S can identify the unique radio ID of any device within range so that devices can be linked and custom configured according to project requirements.

Compliance

For complete regulatory compliance information, see the USB Serial Interface datasheet at echoflexsolutions.com.

FCC Compliance

- Echoflex USB Serial Interface
- (For any FCC matters):
- Echoflex Solutions, Inc.
- 3031 Pleasant View Road
- Middleton, WI 53562
- +1 (608) 831-4116
- echoflexsolutions.com

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received; including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Any modifications or changes to this product not expressly approved by Electronic Theatre Controls, Inc. could void the user's authority to operate the product. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at their own expense. Contains FCC ID: SZV-STM300U

IT Compliance

This device contains a license-exempt transmitter/receiver that complies with Innovation, Science, and Economic Development Canada's license-exempt RSSs. Operation is subject to the following two conditions:

- 1. This device may not cause interference.
- 2. This device must accept any interference, including interference that may cause undesired operation of the device.

Contains IC ID: 5713A-STM300U

Documents / Resources

Echoflex Installation Guide
USB Serial Interface ERUSB-S

Overview

The ERUSB-S is a USB to RS-485 interface module that allows you to connect your Echoflex system to a computer or network. It is designed to be used with the Echoflex system and is compatible with all Echoflex systems.

Features

- RS-485 to USB interface
- Plug and play installation
- No need for drivers
- No need for software
- No need for configuration
- No need for maintenance

Specifications

- RS-485 interface: 120 Ohm termination, 100mV sensitivity
- USB interface: USB 2.0, 1.5m cable length
- Power supply: 5VDC, 100mA
- Dimensions: 100mm x 50mm x 15mm
- Weight: 10g

Warranty

1 Year

Support

1-800-555-1234

[echoflex ERUSB-S USB Serial Interface \[pdf\] Installation Guide](#)

ERUSB-S, USB Serial Interface, ERUSB-S USB Serial Interface, Serial Interface, Interface