


Contents [[hide](#)]

- [1 Electronics RM14-01A Smart Radar System](#)
- [2 Product Information](#)
- [3 Overview](#)
- [4 Features](#)
- [5 Product](#)
- [6 Performance Specifications](#)
- [7 Connections](#)
- [8 FCC STATEMENT](#)
- [9 FAQ](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)

Electronics

Electronics RM14-01A Smart Radar System

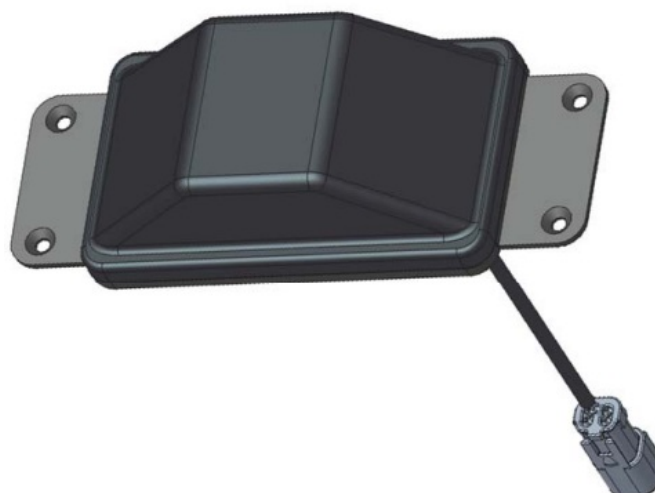

Product Information

- RM14-01A & RM14-06A refer to a module in which the AWR1443 radar IC is mounted on the RM1401 & RM1406 PCB. The AWR1443,
- TI's integrated single-chip mmWave sensor, which integrates a radar front end, hardware accelerators, ARM, and DSP in one CMOS chip, can embed the application software on the radar module.
- SRS's unique antenna design technology and algorithms using the device have enabled the reliable detection performance under various environments.
- The product features include reliable detection performance, integrated radar front end, hardware accelerators, ARM, and DSP in one CMOS chip.
- The product includes RM14-01A Radar Module (Center position), RM14-06A Radar Module (Side position), and PB14 Power Board

Overview

General Description

- IRIS-H is an innovative product designed for the industrial & automotive market segment. It serves as the sensor for environment detection to detect humans, vehicles, or objects around the object.
- It is the reliable guardian for a car that can be used to remove blind spots, to detect front or rear crossing traffic, to recognize objects, etc.
- IRIS-H consists of two RM14-01A & RM14-06A radar modules installed at a right angle, as well as its housing part of the product.
- Using millimeter radio waves, the RM14-01A & RM14-06A provide the ability to effectively detect objects in areas close to the vehicle and alert the vehicle driver.
- Relatively compact RM14-01A & RM14-06A are provided with a tiny form factor to
- feature their usage performance for the designated industrial vehicles market.
- RM14-01A & RM14-06A refer to a module in which the AWR1443 radar IC is mounted on the RM1401 & RM1406 PCB. The AWR1443, TI's integrated single-chip mmWave sensor, which integrates a radar front end, hardware accelerators, ARM, and DSP in one CMOS chip, can embed the application software on the radar module.
- SRS's unique antenna design technology and algorithms using the device have enabled the reliable detection performance under various environments.
- Smart Radar System provides the RM14-01A and RM14-06A modules in different

form factors according to the customer's needs.

- RM14-01A and RM14-06A can be provided with a carrier board for easy PC-based testing.
- But when the customer decides the actual use cases for the adoption of the radar, RM14-01A and RM14-06A will be included inside the actual product formfactor, so differentiated as IRISc (Intelligent Radar for Immersive Sensing for Construction) & IRIS_t (Intelligent Radar for Immersive Sensing for Twin) & IRIS-H (Intelligent Radar for Immersive Sensing for Triple). Housing has both its advantages and disadvantages.

Features

- Innovative industrial vehicle product
- FMCW (Frequency Modulated Continuous Wave)
- 180° azimuth FOV
- Communication with a vehicle or hosts through the CAN interface
- 12V / 24V to power the sensor

Product Appearance



<Top>
RM14-01A Radar Module (Center position)

<Bottom>



<Top>
RM14-06A Radar Module (Side position)


<Bottom>




<Top>

PB14 Power Board


<Bottom>

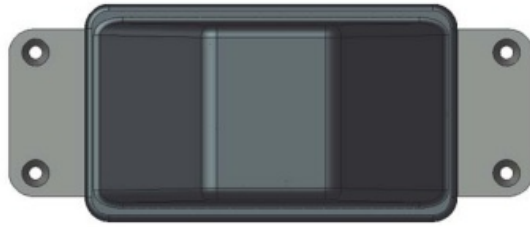

IRIS-H Front

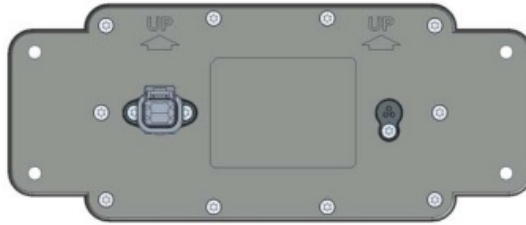

IRIS-H Back

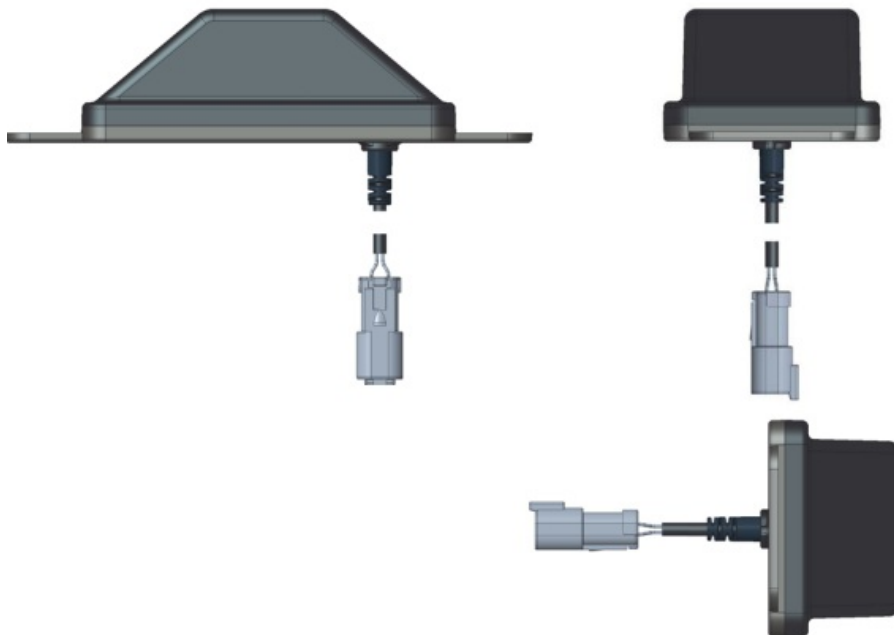

Product

Absolute Maximum Ratings

Parameters	Conditions	Spec.			Notes
		Min	Max	Unit	
Operating Temperature	Complete Sensor	-40	+85	°C	
Storage Temperature	Complete Sensor	-40	+105	°C	

Operating Voltage	Supply Voltage to the Sensor	8	32	V	
--------------------------	------------------------------	---	----	---	--

Operating Conditions

Parameters		Spec.	Notes
Frequency	Range	78 ~ 81 GHz	
	Bandwidth	Max 2.95 GHz	
Antenna Power		Max 10dBm / 10mW	$\leq 10\text{mW}$
		Avg 0.06dBm / 1.014mW	
Transmitted Antenna Gain		Max 10.8dBi	$\leq 35\text{dBi}$
Main Power Supply		Typ. 12V / 24V	
Power Consumption		Ave.: 5W, Peak.: 8W	
Protection Rating		IP69	

Performance Specifications

(@ 25°C unless otherwise noted)


Parameters	Spec.			Notes
	Min	Typ.	Max	
Detection Range	0.9m		13m	Vehicle / Pedestrian
Range Resolution	0.2m			

Azimuth Angle (H. FOV)	170°	
Azimuth Resolution	18°	
Elevation Angle (V. FOV)	30° (±15°)	
Elevation Resolution	N/A	
Cycle Time	100ms	Configurable

- Specifications in this datasheet are subject to change without notice.
- Any specifications not determined in the above table are under test and will be updated with details.

Connections

IRIS-H – Connector Type

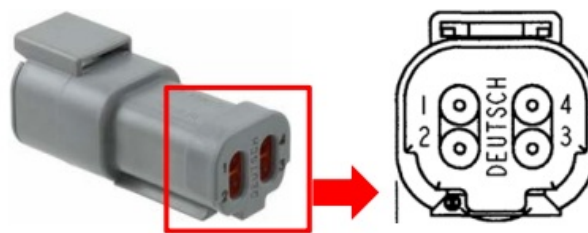


Part Number: DTM04-4P-E003 (TE)

Part Number: DTM04-4P-E003 (TE)

Pin Number	Name	Electrical spec.	IN/OUT	Cable Color
1	VBAT	+12V/24V	PWR	RED
2	GND	GND	PWR	BLACK
3	CAN_H	2.75 – 4.5V	IN/OUT	WHITE
4	CAN_L	0.5 – 2.25V	IN/OUT	GREEN

- CAN Termination Resistor(120Ω): Not Assembly at product

PB14 – Power Connector Type

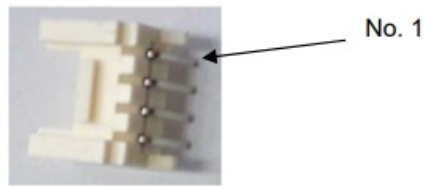


PB14 – Power Connector Type

Pin Number	Name	Electrical spec.	IN/OUT	Cable Color
1	GND	GND	PWR	BLACK
2	VBAT	+12V/24V	PWR	RED
3	CAN_H	2.75 – 4.5V	IN/OUT	WHITE
4	CAN_L	0.5 – 2.25V	IN/OUT	GREEN

PB14 – Radar Connector Type

RM14-01A & RM14-06A (IRIS-H Internal) – Connector Type

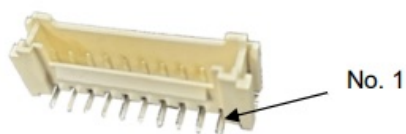


Part Number: SMW200-H10G(YEONHO)

Pin Number	Name	Electrical spec.	IN/OUT	Description
1	VPWR	+5.0V	PWR	
2	GND	GND	PWR	

3	UART1_RX	L:<0.62V H:>2.25V	IN	
4	UART1_TX	L:<0.45V H:>2.85V	OUT	
5	SOP_2	L:<0.3V H:>1.57V	IN	Boot mode selection (default: Low) Internal pull-down
6	RESET_N	L:<0.3V H:>1.57V	IN	Low-Active (Internal pull-up)
7	PWR_EN	L:<0.3V H:>1.57V	IN	High-Active (default: High) Internal pull-up
8	PGOOD	L:<0.45V H:>2.85V	OUT	High-Active (Internal pull-up)
9	UART2_RX	L:<0.62V H:>2.25V	IN	
10	UART2_TX	L:<0.45V H:>2.85V	OUT	

Mechanical Specifications

Items	Spec.	Notes
Dimension	217 x 90 x 55	(WxLxH) (mm) (without Cable)
Weight	485g	(< 500g)

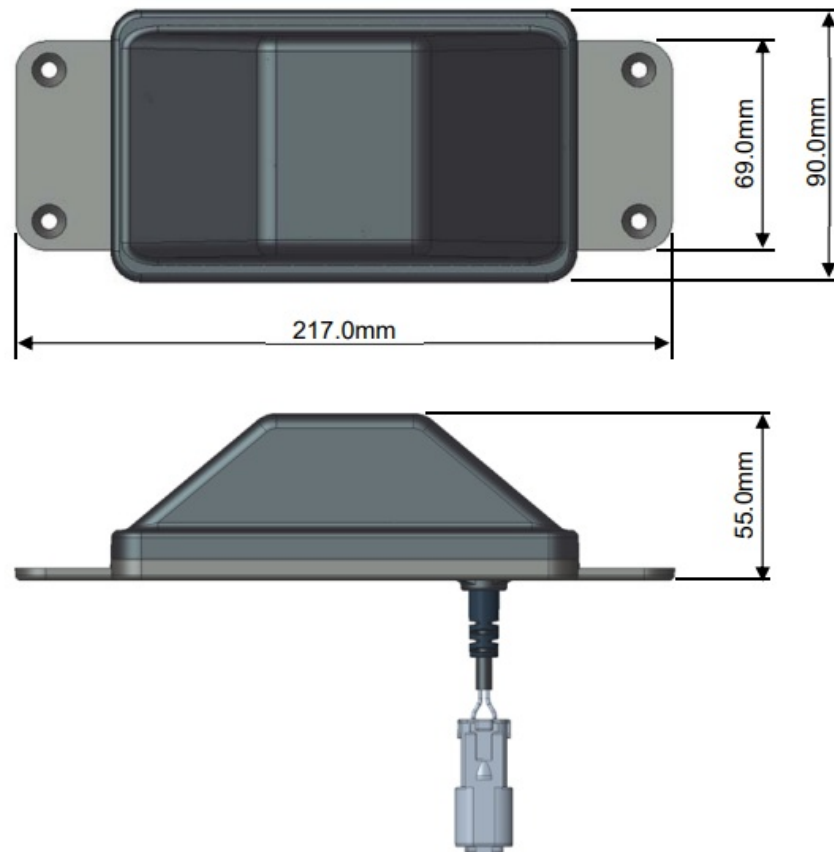

CAN Protocol (TBD)

The rear radar uses CAN protocol to communicate with the host system.

- CAN version: Supports CAN 2.0 A, B
- Speed: 1Mbps
- Data structure:

Standard CAN ID	DATA[0]	DATA[1]	DATA[2]	DATA[3]	DATA[4]	DATA[5]	DATA[6]	DATA[7]	Meaning
Start CAN ID	OBJECT_X	OBJECT_Y	OBJECT_Power	RESERVED					info. Of the 1-st detected object
Start CAN ID + 1	OBJECT_X	OBJECT_Y	OBJECT_Power	RESERVED					info. Of the 2-nd detected object
Start CAN ID + i					info. Of the i-th detected object
End CAN ID	OBJECT_X	OBJECT_Y	OBJECT_Power	RESERVED					info. Of the 20-th detected object

	name	field	option	unit	meaning
PAYLOAD	OBJECT_X	DATA[0,1]	INT16	cm	x-direction position of the i-th detected object
	OBJECT_Y	DATA[2,3]	INT16	cm	x-direction position of the i-th detected object
	OBJECT_Power	DATA[4,5]	UINT16		power of the i-th detected object
	RESERVED	DATA[6,7]	RESERVED		RESERVED

Status: Init	Date: Jul. 31 th , 2024	Author: Smart Radar System
Version: 1.5	Document number:	Filename: IRIS-H Product Specification (User's Manual)

Revision History

Date	Ver	Revision	Page	Section
2023 Jul 17 th	1.0	Initial draft		
2024 Jul 31 th	1.5	A few minor changes		

FCC STATEMENT

FCC compliance information

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference, and
- 2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, according to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed

and used following the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and the receiver
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help
- Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- This device should be installed and operated with a minimum of 20 cm between the radiator and your body.

Part 95 prohibits the use of this radar device while airborne.

ISED compliance information

This device contains licence-exempt transmitter(s)/receiver that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:


1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

This equipment should be installed and operated with a minimum of 20 cm between the radiator and your body. RSS-251 prohibits the use of this radar device while airborne.

FAQ

- **Q:** Can the product detect both vehicles and pedestrians?
- **A:** Yes, the product can detect both vehicles and pedestrians within the specified detection range.

Documents / Resources

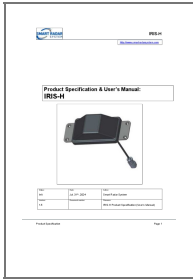

[Electronics RM14-01A Smart Radar System \[pdf\]](#) User Manual
RM14-01A, RM14-06A, RM14-01A Smart Radar System, RM14-01A, Smart Radar System, Radar System

References

- [User Manual](#)

📁 Electronics, Radar System, RM14-01A, RM14-01A Smart Radar System, RM14-06A, Smart Radar System

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.