



EMERSON TopWorx GO Switch Proximity Sensor Instruction Manual

[Home](#) » [Emerson](#) » **EMERSON TopWorx GO Switch Proximity Sensor Instruction Manual** 

Contents

- [1 EMERSON TopWorx GO Switch Proximity Sensor](#)
- [2 Introduction](#)
- [3 Mounting](#)
- [4 Specifications – SPDT](#)
- [5 Operating Temperature](#)
 - [5.1 Electrical Ratings](#)
 - [5.2 Specifications – SPDT](#)
 - [5.3 Specifications – DPDT](#)
- [6 Setting Up A Nuclear Service GO Switch For Optimum Performance](#)
- [7 GLOBAL SUPPORT OFFICES](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)
- [9 Related Posts](#)



EMERSON TopWorx GO Switch Proximity Sensor



Introduction

GO™ Safety Related Switches operate on the principle of magnetic attraction, reacting to magnetic targets as they come within the switch's sensing range. Although switches vary in design according to their intended applications, all GO Switches use permanent magnets which, when actuated by the presence of a magnetic target, change the state of electrical contacts.



Mounting

- Nuclear service GO Switches are immune to EMC and RF interference.
- Use non-ferrous, stainless steel mounting brackets only. Consult factory for available mounting kits. For the maximum rated sensing distance, avoid mounting near ferrous metals or in a ferrous metal bracket.
- C7, C8, H7, H8, M7, M8, R7 and SV-7 nuclear service GO Switches must be installed with TopWorx qualified target magnets. Reference sensing ranges in corresponding sections throughout the catalog.
- Sensing and differential of switch may vary depending on target travel direction.
- Configure mounting of the switch and/or target so that target passes within the sensing area without physically contacting the switch. Sensing range will vary according to switch and target mode.

Caution:

Do not use excessive force on external threads when installing. The switch threads need to be properly torqued as indicated below when mounted to any fixture. Over-torquing or under-torquing the switch threads may cause the switch to operate improperly. TopWorx recommends a torque value of 35 lbs – ft. (47.45 Nm) with a tolerance of + /- 2 lbs.- ft.(2.71 Nm).

- The switch must be mounted on the bracket and bolted close to the end of its threads, near its center of mass. This eliminates undue stress caused by heavy cables, connectors, etc.



- For heavy or inductive loads, arc suppression devices, or interposing relays are recommended for contact longevity. Contact factory for specifics.
- Installation must use included Jam nuts and Lock washers.
- Recommended installation distance is equal to the half of published sensing distance per switch.

H7, M7, & SV7

Specifications – SPDT

- Coaxial Sensing Distance w/ C-AMS7A Target
- Average Sensing $0.190'' \pm 0.040''$ (4.83 mm \pm 1.02 mm)
- Average Reset $0.023'' \pm 0.010''$ (0.58 mm \pm 0.25 mm)


Coaxial Sensing Distance w/C-AMS12 Target

- Average Sensing $0.350'' \pm 0.025''$ (8.89 mm \pm 0.64 mm)
- Average Reset $0.031'' \pm 0.015''$ (0.79 mm \pm 0.38 mm)
- Pressure Rating At Sensing Surface: 2,000 psi (137.89 bar)
- Thread Options: 5/8"-18 UNF (Consult TopWorx for metric thread options)

Operating Temperature

Qualified Life (Years)	Max. Normal Op. Temp.*	
	H7 & M7 SWITCHES	SV7 SWITCHES
5	76 °C	85 °C
10	69 °C	78 °C
20	63 °C	71.5 °C
40	57 °C	65 °C
60	52.5 °C	61.5 °C

- ATEX (all except SV7): -40°C (-40°F) to 150°C (302°F) The switch service (qualified) life depends on its operating temperature.
- Contact Material: Palladium silver with Sawtooth surface configuration
- Contacts: Single Pole, Double Throw, Form C.

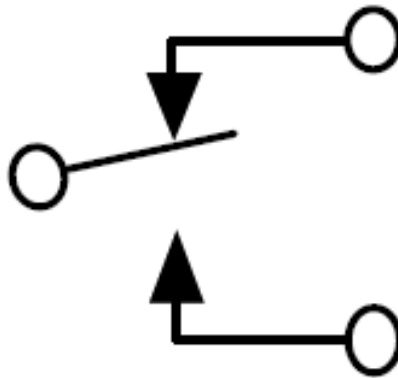


Electrical Ratings

Contact Ratings* (Resistive)	AC	DC
Power (W)	0.5 – 480	0.2 – 72
Voltage (V)	100 – 250	24 – 137
Current (A)	0.004 – 5.0	0.004 – 3.0

ATEX (all except SV7): 4A @120VAC / 3A @ 24VDC

Consult factory for higher Amp rating requirements

- Target Material: Target magnets C-AMS7A or C-AMS12
- Enclosure Material: SS type 303 or 316
- Conduit Outlet: 1/2"-14 NPT. One location

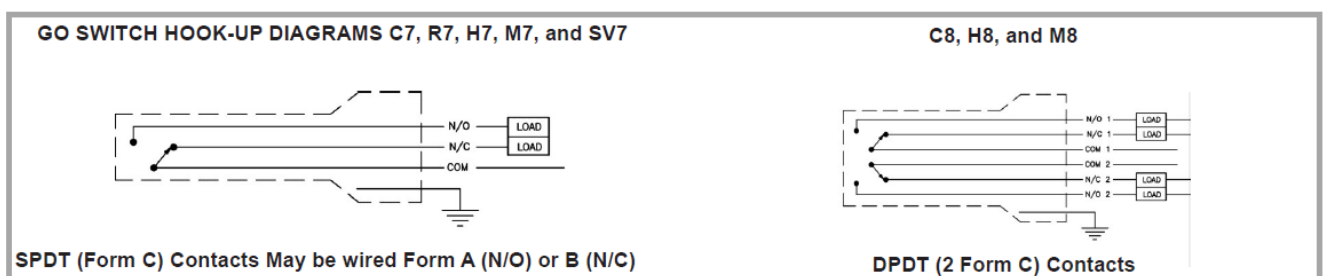

C7 & R7

Specifications – SPDT

- Coaxial Sensing Distance w/ C-AMS7A Target
- Average Sensing 0.100" ± 0.020" (2.54 mm ± 0.51 mm)
- Average Reset 0.023" ± 0.010" (0.58 mm ± 0.25 mm)


Coaxial Sensing Distance w/C-AMS12 Target

- Average Sensing 0.250" ± 0.025" (6.35 mm ± 0.64 mm)
- Average Reset 0.031" ± 0.015" (0.79 mm ± 0.38 mm)
- Pressure Rating At Sensing Surface: 2,000 psi (137.89 bar)
- Thread Options: 5/8"-18 UNF (Consult TopWorx for metric thread options)

Operating Temperature

C7 & R7 SWITCHES	
Qualified Life (Years)	Max. Normal Op. Temp.*
5	76 °C
10	69 °C
20	63 °C
40	57 °C
60	52.5 °C

- ATEX: -40°C (-40°F) to 150°C (302°F) The switch service (qualified) life depends on its operating temperature.
- Contact Material: Palladium silver with Sawtooth surface configuration
- Contacts: Single Pole, Double Throw, Form C.

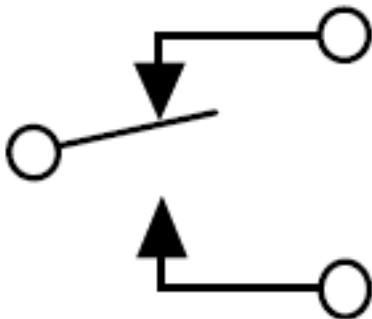

Electrical Ratings

Contact Ratings* (Resistive)	AC	DC
Power (W)	0.5 – 480	0.2 – 72
Voltage (V)	100 – 250	24 – 137
Current (A)	0.004 – 5.0	0.004 – 3.0

- ATEX: 4A @ 120VAC / 3A @ 24VDC Consult factory for higher Amp rating requirements
- Target Material: Target magnets C-AMS7A or C-AMS12
- Enclosure Material: SS type 303 or 316L (RCC-EK1+)
- Conduit Outlet: 3/4"-14 NPT. One location

C8, H8, & M8


Specifications – DPDT

- Coaxial Sensing Distance w/ C-AMS7A Target
- Average Sensing 0.100" ± 0.020" (2.54 mm ± 0.51mm)
- Average Reset 0.023" ± 0.010" (0.58 mm ± 0.25mm)
- Coaxial Sensing Distance w/C-AMS12 Target
- Average Sensing 0.250" ± 0.025" (6.35 mm ± 0.64 mm)
- Average Reset 0.031" ± 0.015" (0.79 mm ± 0.38 mm)
- Pressure Rating At Sensing Surface: 2,000 psi (137.89 bar)
- Thread Options: 1"-14 UNF (Consult TopWorx for metric thread options)

Operating Temperature:

C8, H8, & M8 SWITCHES	
Qualified Life (Years)	Max. Normal Op. Temp.*
5	76 °C
10	69 °C
20	63 °C
40	57 °C
60	52.5 °C

- ATEX: -40°C (-40°F) to 150°C (302°F) The switch service (qualified) life depends on its operating temperature.
- Contact Material: Palladium silver with Sawtooth surface configuration
- Contacts: Double Pole Double Throw, 2 Form C.

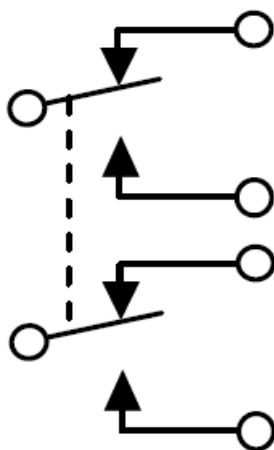

Electrical Ratings:

Contact Ratings* (Resistive)	AC	DC
Power (W)	0.5 – 480	0.2 – 72
Voltage (V)	100 – 250	24 – 137
Current (A)	0.004 – 5.0	0.004 – 3.0

- ATEX: 3A @ 120VAC / 1A @ 24VDC Consult factory for higher Amp rating requirements
- Target Material: Target magnets C-AMS7A or C-AMS12
- Enclosure Materials: SS type 303
- Conduit Outlet: 3/4"-14 NPT. One location

Setting Up A Nuclear Service GO Switch For Optimum Performance


Nuclear service GO Switches use permanent magnets and a push-pull plunger to control a set of dry contacts. When a target magnet enters the sensing area of the switch, it attracts the primary magnet, which pulls the connecting rod and common contact. The normally closed and normally open contacts change state. (Continued on page 2.)

Attachment of Conduit or Cable Continued:


The sensing distance recommended by TopWorx is the maximum distance between the switch and the target magnet trip point. The average reset, also known as deadband or hysteresis, is the distance that the target magnet must move from the sensing area in order to allow the switch to reset. To apply the Nuclear service GO Switch and obtain the least differential, the direction the target approaches the switch must be considered (axial, radial). The measurements shown are nominal depending on the size of the target magnet used in the application. Consult the coaxial sensing distance for each switch model listed in this IOM.

With proper mounting, once the switch is set, the GO Switch will maintain calibration for life. See the illustration below for correct switch alignment.

C-AMS7A Target Magnet

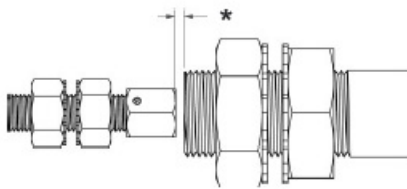

C-AMS12 Target Magnet

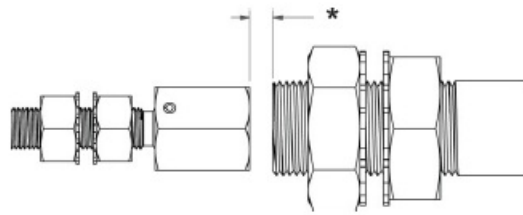

Refer to switch specifications for average sensing distance.

The target magnet threads need to be properly torqued when mounted to any fixture. The target magnets were mounted at a torque value of 35 lbs-ft (47.45 Nm) with a tolerance of + /- 2 lbs.-ft. (2.71 Nm) during seismic testing.

Ex d IIC T3 Gb; Ex tb IIIC T200 °C Db (Tamb – 40 °C to + 150 °C) Baseefa08ATEX0360X IECEx BAS 08.0122X 120VAC/4A AND 24VDC/3A FOR SPDT SWITCHES 120VAC/3A AND 24VDC/1A FOR DPDT SWITCHES

PLEASE NOTE: THE SV7 SWITCH IS NOT CERTIFIED BY ATEX OR IECEx.

Attachment of Conduit or Cable

Attach conduit or cable correctly. The switch conduit or cable needs to be properly supported when mounted to any fixture. During seismic testing, the stainless steel conduit (with PEEK cable) was supported at 3.28 ft (1 m) from the back of the switch while the Rockbestos or PEEK cables were supported at 1 ft (0.305 m) away from the back of the switch. EGS Flex conduit and support kit are available from TopWorx as an option. During seismic testing of the C7 switch with EGS QDC and flex conduit, the flex conduit was supported 15"- 48" from the QDC interface. Please consult factory for more detailed information.

- If the switch is mounted on a moving part, be sure the flexible conduit is long enough to allow for movement and positioned to eliminate binding or pulling.
- For installation in hazardous locations, check local electrical codes.
- All conduit-connected switches should be installed using proper installation methods.
- The GO Switch must have a qualified QDC, a qualified sealed stainless steel conduit, or other types of the qualified accepted seal when used in submerged applications or exposed to 100% humidity. For LOCA DBA type submergence, however, only the C7 switch has been qualified for this application.
- Per Qualtech Report No. TR-23009-14 Rev A, the EGS O-ring qualified life at continuous operation, without disconnection, is 25.1 years at 144.14 °F (62.3 °C). If for any reason these assemblies need to be detached prior to installation or while in operation, the O-rings must then be replaced. The maximum shelf life that can be assigned for the O-Ring is 10 years from the cure date. As long as the O-Rings have been stored per the guidelines of ANSI N45.2.2, Level B (now ASME NQA-1, Part II, Subpart 2.2, Level B), the O-Ring may be placed into installed service any time prior to the shelf life expiration date without impinging on the qualified life outlined above



All GO Switches are "pure" contact switches, meaning they have negligible voltage drop when closed, nor do they have any leakage current when open. For multi-unit installation, switches may be wired in series or parallel, as shown to the right.

Series Wiring

Any number of GO Switches may be wired in series, without voltage drop.

Parallel Wiring

Any number of GOTM Switches may be wired in parallel, with no current leakage and without drawing operating current.

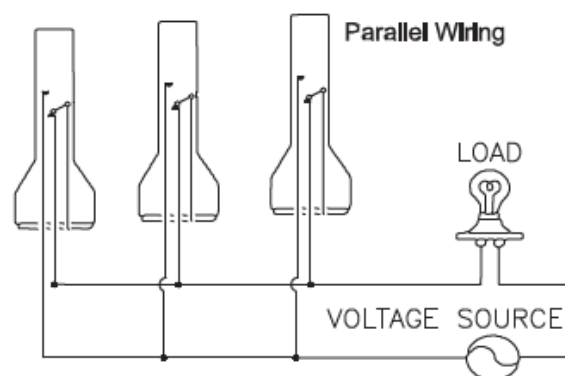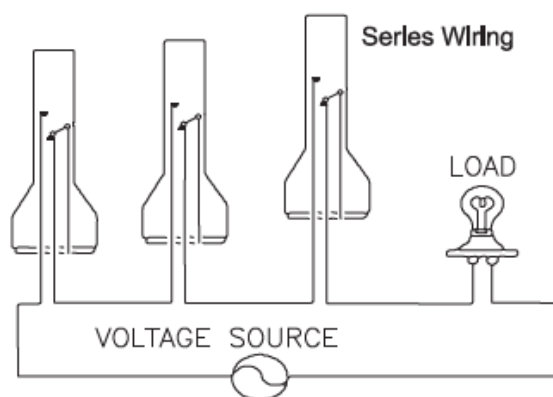

Special Conditions for Safe Use

The field side wires should be protected against damage and terminated to a terminal or junction box suitable for the conditions of use. Due to the GO Switch's sealed construction, field service is not available. Refer to our troubleshooting guide for a possible solution. If the problem persists, please contact the factory directly.

EU Declaration of Conformity

The products described herein, conform to the provisions of the following European Community Directives, including the latest amendments:

- Low Voltage Directive (2006/95/EC)
- EMC Directive (2004/108/EC)
- ATEX Directive (2014/34/EU)

C7 & R7 SPDT

4 COND. Peek Cable

N/C	Red
N/O	Blue
COM	Black
GND	Green

C8, H8, & M8 DPDT 7 COND.**Peek Cable & EGS Connector**

N/C1	Red
N/O1	Blue
COM1	Black
N/C2	Yellow
N/O2	Brown
COM2	Natural
GND	Green

EGS 4 Pin Connector

N/C	A Red
N/O	B White
COM	C Black
GND	D Green

Visit www.topworx.com for comprehensive information on our company, capabilities, and products— including model numbers, data sheets specifications, dimensions, and certifications.

info@topworx.com. www.topworx.com.

GLOBAL SUPPORT OFFICES**Americas**

- 3300 Fern Valley Road Louisville, Kentucky 40213 USA
- +1 502 969 8000

Asia-Pacific

- 1 Pandan Crescent Singapore 128461
- +65 6891 7550

Europe

- Horsfield Way Bredbury Industrial Estate Stockport SK6 2SU United Kingdom
- +44 0 161 406 5155

Middle East

- P.O. Box 17033 Jebel Ali Free Zone Dubai 17033 United Arab Emirates


- 971 4 811 8283

Africa

- 24 Angus Crescent Longmeadow Business Estate East Gauteng, South Africa
- +27 011 451 3700

The Emerson logo is a trademark and service mark of Emerson Electric Co. ©2016 Emerson Electric Co. ©2016 TopWorx, All rights reserved. TopWorx™ and GO™ Switch are all trademarks of TopWorx. All other marks are the property of their respective owners. Information herein – including product specifications – is subject to change without notice.

Documents / Resources



[EMERSON TopWorx GO Switch Proximity Sensor](#) [pdf] Instruction Manual
TopWorx GO Switch Proximity Sensor, GO Switch, Proximity Sensor, Sensor

References

-  [TopWorx | Emerson US](#)