



Contents [[hide](#)]

- 1 [ENFORCER SD-927PWCQ Wave to Open Sensor](#)
- 2 [Product Information](#)
- 3 [INTRODUCTION](#)
- 4 [Features](#)
- 5 [Parts List](#)
- 6 [Specifications](#)
- 7 [Dimension](#)
- 8 [Installation](#)
- 9 [Troubleshooting](#)
- 10 [Pasting the Decals](#)
- 11 [WARRANTY](#)
- 12 [CUSTOMER SERVICE](#)
- 13 [Documents / Resources](#)
 - 13.1 [References](#)

ENFORCER

ENFORCER SD-927PWCQ Wave to Open Sensor



Product Information

Manual: 5024193 Conforms to UL294

The ENFORCER Wave-to-Open Sensor uses IR technology to request egress from a protected area or activate a device with the simple wave of a hand. Suitable for use in hospitals, clinics, labs, cleanrooms, schools, factories, or offices.

Features

- ENFORCER Wave-to-Open Sensor

Parts List

- 1x Wave-to-Open Sensor
- 2x Mounting screws
- 1x Decal set
- 1x Manual

Specifications

- **Operating voltage:** 12VDC

- **Current draw (max.):** 50mA@12VDC
- **Relay type:** Form C dry contact, 3A@30VDC
- **Response time:** 11/8 (29mm)
- **Sensing range:** 21/8 (55mm)
- **Operating temperature:** Standard duty, -40°F to 122°F (-40°C to 50°C)
- **Weight: Standard:** 1.3oz (38g)

Installation

1. Run four wires to a single-gang back box. Power must be provided by a low-voltage power-limited/Class 2 power supply and low-voltage field wiring not to exceed 98.5ft (30m).
2. Connect the four wires from the back-box to the quick-connect terminals according to Fig. 1.
3. Screw the plate into the back-box, taking care not to crimp the wires.
4. Remove the clear protective film from the sensor before use.

Care and Cleaning

1. Use a soft, clean cloth, preferably a microfiber cloth, to avoid scratching the decals or sensor.
2. Use the mildest cleaner available. Strong cleaning chemicals may damage the decals.
3. Spray the cleaning solution onto the cleaning cloth instead of the unit.
4. Wipe off any excess liquid from the sensor to avoid affecting performance.

INTRODUCTION

- The ENFORCER Wave-to-Open Sensor uses IR technology to request egress from a protected area or activate a device with the simple wave of a hand.
- Since no touch is required, this sensor is suitable for use in hospitals, clinics, labs, cleanrooms (to reduce the risk of contamination), schools, factories, or offices.

Features

- Range up to 2" (5cm)
- White plastic single-gang plate

- 3A relay, triggers minimum 0.5 sec or as long as the hand is near the sensor
- Quick-connect screwless terminal block
- LED illuminated sensor area for easy identification
- Selectable LED colours (turns from red to green or green to red) on sensor activation
- Power must be provided by a low-voltage power-limited/Class 2 power supply
- Use only low-voltage field wiring and do not exceed 98.5ft (30m)

Parts List

- **1x** Wave-to-Open Sensor
- **2x** Mounting screws
- **1x** Decal set
- **1x** Manual


Specifications

Operating voltage		12VDC
Current draw (max.)		50mA@12VDC
Relay type		Form C dry contact, 3A@30VDC
Response time		10ms
LEDS	Standby	Red*
	Triggered	Green*
Output time		0.5 sec or as long as the hand is near the sensor
Sensing range		2" (5cm)
Destructive attack level		Level I
Line security		Level I
Endurance level		Level IV

Standby power	Level I
Operating temperature	-4°~131° F (-20°~55° C)
Weight	2.5-oz (70g)

Default, reversible by jumper

Dimension

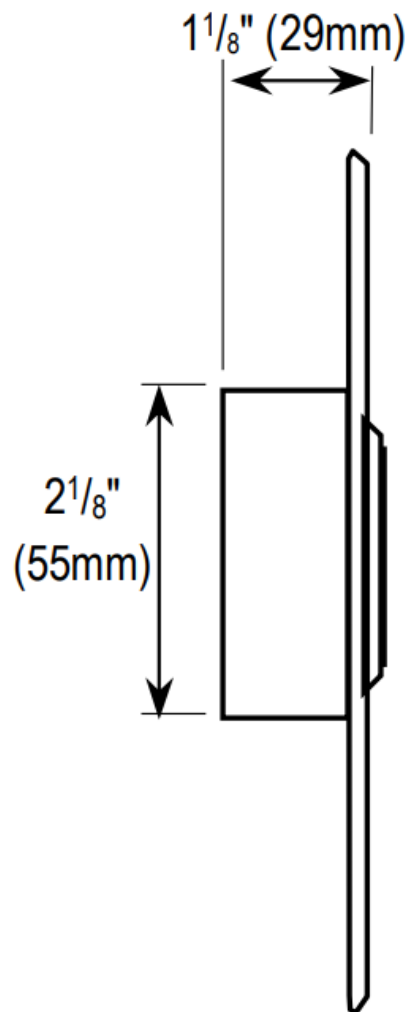

Installation

1. Run four wires to a single-gang back box. Power must be provided by a low-voltage power-limited/Class 2 power supply and low-voltage field wiring not to exceed 98.5ft (30m).
2. Connect the four wires from the back-box to the quick-connect terminals according to Fig. 1.


3. Screw the plate into the back-box, taking care not to crimp the wires.
4. Remove the clear protective film from the sensor before use.

INSTALLATION NOTES

- This product must be electrically wired and grounded under local codes or, in the absence of local codes, with National Electric Code ANSI/NFPA 70-latest edition or the Canadian Electrical Code CSA C22.1.
- Due to the nature of IR technology, an IR sensor can be triggered by a direct light source such as sunlight, reflected light from a shiny object, or other direct light aimed at the sensor.
- Consider how to protect the sensor from direct sunlight or other direct, bright light sources.

Adjusting the LED Colour:

1. The LED factory default is red (standby) and green (triggered).
2. To reverse the LED colour visual indicator to green (standby) and red triggered, remove the jumper located at the right side of the terminal block as shown in **Fig. 1**.

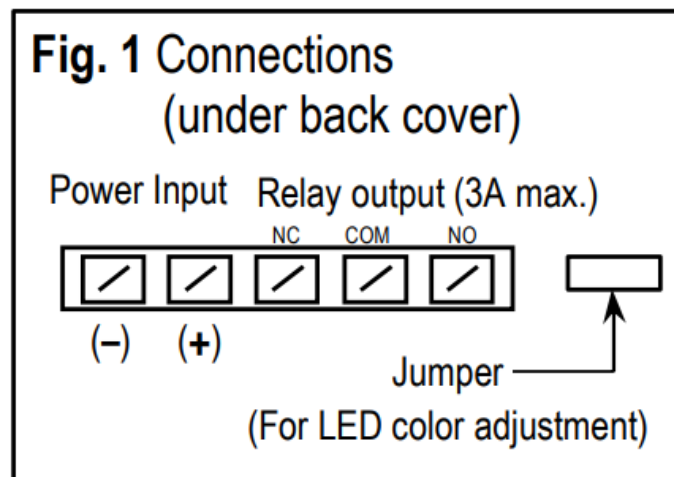

Care and Cleaning for the Wave-to-Open Sensor:


The SD-927PWCQ is designed for indoor use to match most interiors. The sensor and decals require special care to ensure reliability and a long operating life.

1. Use a soft, clean cloth, preferably a microfiber cloth, to avoid scratching the decals or sensor.


2. Use the mildest cleaner available. Strong cleaning chemicals may damage the decals.
3. When cleaning, spray the cleaning solution onto the cleaning cloth instead of the unit.
4. Be sure to wipe off any excess liquid from the sensor. Wet spots or areas may affect the sensor's performance.

Sample Installations


1. Installation with Electromagnetic Lock (Fail-Safe)

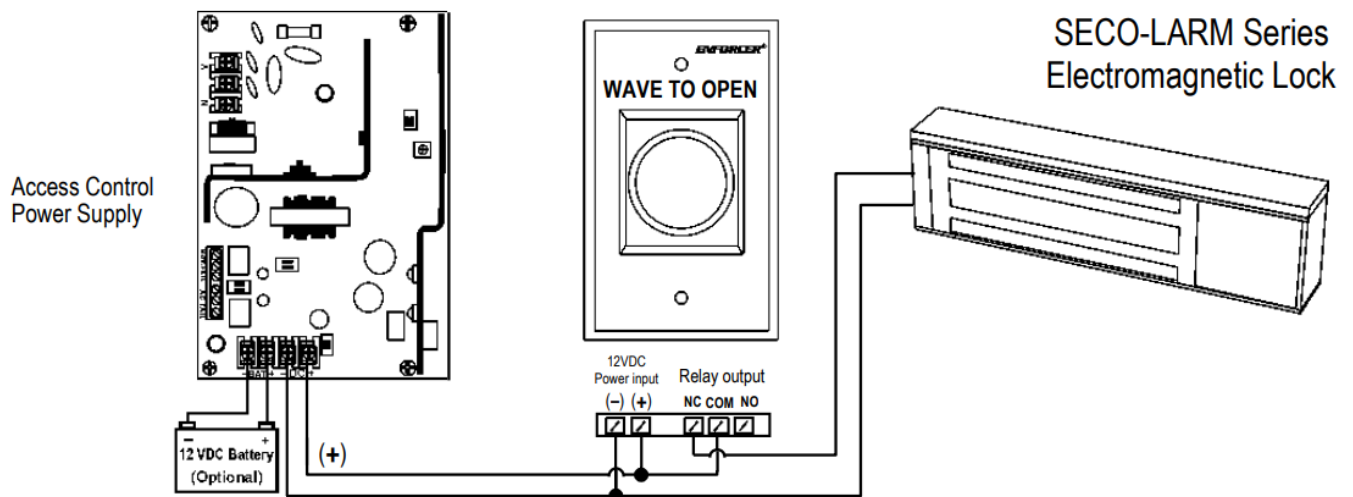

2. Installation with Electric Door Strike (Fail-Secure)

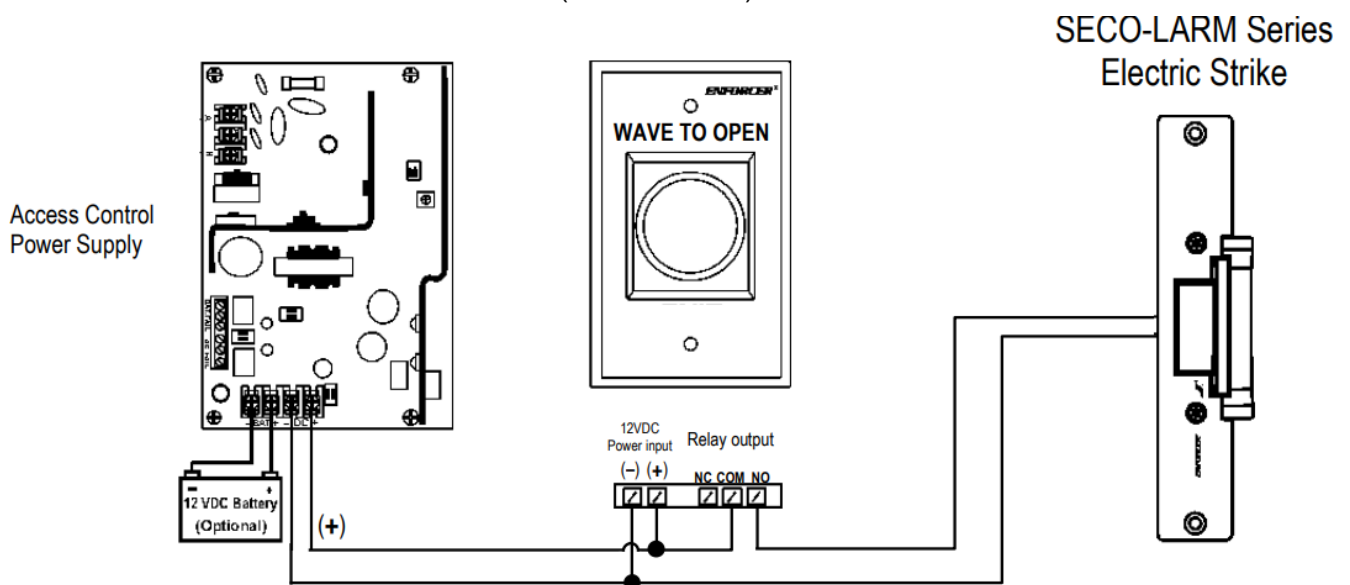

3. Installation with Electromagnetic Lock and Keypad

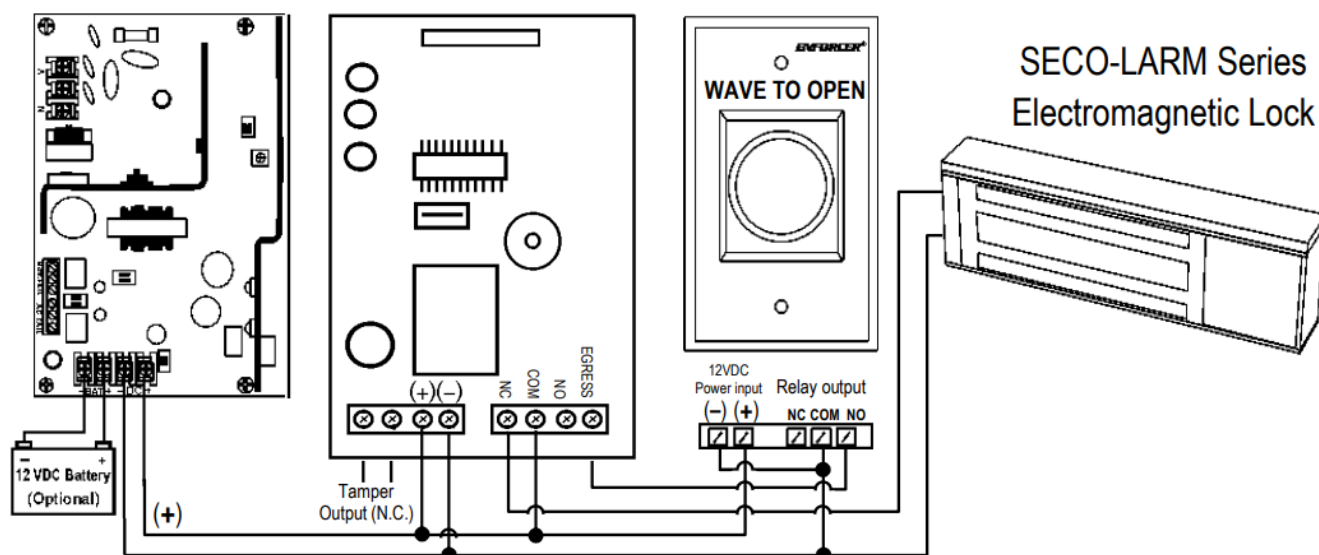

Troubleshooting

- **Sensor triggers unexpectedly**

- Ensure that no strong direct light source or reflected light is reaching the sensor.
- Ensure that direct sunlight is not reaching the sensor.

- **Sensor remains triggered**

- Check that nothing is remaining in range of the sensor, including being within a cone of 60° from the centerline.
- Check that the power voltage is within the sensor's specifications.


- **The sensor will not trigger**

- Check that the power voltage is within the sensor's specifications.

Pasting the Decals

1. Select the appropriate decals in English, French, or Spanish* according to your language requirements.
2. Remove the back sheet of the decal and then set it on the desired location. Use the thin lines on the left and right sides of the text on the decals for alignment, see **Fig. 2**.
3. After the decal has been placed and set in the desired location, scratch the front of the decal to transfer the text onto the faceplate.

Fig. 2 Decal Alignment

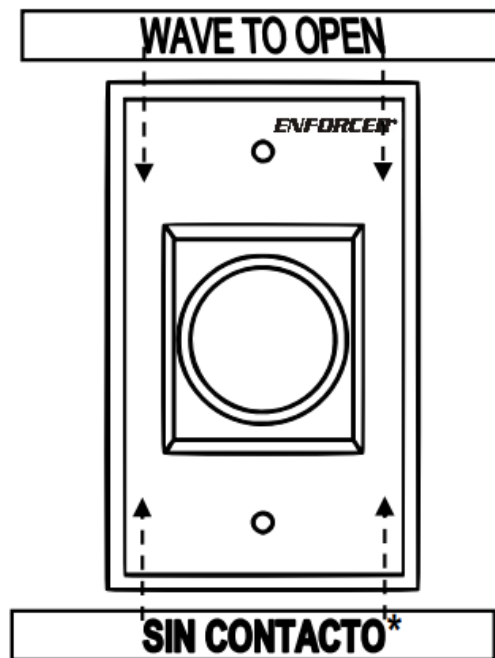

- **NOTE:** The decal needs at least 24 hrs to fully dry & bond to the surface. Do not touch or scratch until the decal is fully dry.
- Decals for the lower part of the plate are provided for Spanish and French only.

WARRANTY

- **California Proposition 65 Warning:** These products may contain chemicals which are known to the State of California to cause cancer and birth defects or other reproductive harm.
- For more information, go to www.P65Warnings.ca.gov.
- **IMPORTANT:** Users and installers of this product are responsible for ensuring that the installation and configuration of this product complies with all national, state, and local laws and codes related to locking and egress devices.
- SECO-LARM will not be held responsible for the use of this product in violation of any current laws or codes.
- **IMPORTANT WARNING:** Incorrect mounting, which leads to exposure to rain or moisture inside the enclosure, could cause a dangerous electric shock, damage the device, and void the warranty.
- **WARRANTY:** This SECO-LARM product is warranted against defects in material and workmanship while used in normal service for one (1) year from the date of sale to the original customer.
- SECO-LARM's obligation is limited to the repair or replacement of any defective part if


the unit is returned, transportation prepaid, to SECO-LARM.

- This Warranty is void if damage is caused by or attributed to acts of God, physical or electrical misuse or abuse, neglect, repair or alteration, improper or abnormal usage, or faulty installation, or if for any other reason SECO-LARM determines that such equipment is not operating properly as a result of causes other than defects in material and workmanship. The sole obligation of SECO-LARM and the purchaser's exclusive remedy shall be limited to the replacement or repair only, at SECO-LARM's option.
- In no event shall SECO-LARM be liable for any special, collateral, incidental, or consequential personal or property damage of any kind to the purchaser or anyone else.
- **NOTICE:** The SECO-LARM policy is one of continual development and improvement. For that reason, SECO-LARM reserves the right to change specifications without notice.
- SECO-LARM is also not responsible for misprints. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.
- Copyright © 2022 SECO-LARM U.S.A., Inc. All rights reserved.

CUSTOMER SERVICE

- **SECO-LARM ® U.S.A., Inc.**
- **16842 Millikan Avenue, Irvine, CA 92606**
- **Website:** www.seco-larm.com
- **Phone:** 9492612999
- **800662-0800**
- **Email:** sales@seco-larm.com
- **MI_SD-927PWCQ_220801.docx**
- **SECO-LARM U.S.A., Inc.**

Documents / Resources



ENFORCER
SD-927PWCQ
Wave to Open Sensor
Manual

The SD-927PWCQ Wave to Open Sensor is a wireless sensor that can be used to monitor doors, windows, drawers, and cabinets. It is designed to be easy to install and use, and it can be used in a variety of settings. The sensor is made of plastic and is about the size of a small book. It has a green LED light on the front and a small antenna on the back. The manual is written in English and includes instructions on how to install and use the sensor.

ENFORCER SD-927PWCQ Wave to Open Sensor [pdf] Instruction Manual

SD-927PWCQ, SD-927PWCQ Wave to Open Sensor, Wave to Open Sensor, Open Sensor, Sensor

References

- [User Manual](#)

- ENFORCER
- ENFORCER, Open Sensor, SD-927PWCQ, SD-927PWCQ Wave to Open Sensor, Sensor, Wave to Open Sensor

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

[Post Comment](#)

Search:

[Search](#)

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.