


EPSON S5U1C17M03T Cmos 16-Bit Dmm Microcontroller Board User Manual

[Home](#) » [Epson](#) » EPSON S5U1C17M03T Cmos 16-Bit Dmm Microcontroller Board User Manual 

EPSON EXCEED YOUR VISION

CMOS 16-BIT DMM MICROCONTROLLER BOARD
S5U1C17M03T Manual
(Software Evaluation Tool for S1C17M03)

Contents

- [1 S5U1C17M03T Cmos 16-Bit Dmm Microcontroller Board](#)
- [2 Overview](#)
- [3 Specification](#)
- [4 Function](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)

S5U1C17M03T Cmos 16-Bit Dmm Microcontroller Board

Evaluation board/kit and Development tool important notice

1. This evaluation board/kit or development tool is designed for use with engineering evaluation, demonstration, or development purposes only. Do not use it for other purposes. It is not intended to meet the design requirements of finished products.
2. This evaluation board/kit or development tool is intended for use by an electronic engineer and is not a consumer product. The user should use it properly and in a safe manner. Seiko Epson does not assume any responsibility or liability of any kind of damage and/or fire caused by its use. The user should cease to use it

when any abnormal issue occurs even during proper and safe use.

3. Parts used for this evaluation board/kit or development tool may be changed without any notice.

NOTICE : PLEASE READ THE FOLLOWING NOTICE CAREFULLY BEFORE USING THIS DOCUMENT

The contents of this document are subject to change without notice.

1. This document may not be copied, reproduced, or used for any other purpose, in whole or in part, without the consent of the Seiko Epson Corporation ("Epson").
2. Before purchasing or using Epson products, please contact our sales representative for the latest information and always be sure to check the latest information published on Epson's official web sites and other sources.
3. Information provided in this document such as application circuits, programs, usage, etc., are for reference purposes only. Using the application circuits, programs, usage, etc. in the design of your equipment or systems is your own responsibility. Epson makes no guarantees against any infringements or damages to any third parties' intellectual property rights or any other rights resulting from the information. This document does not grant you any licenses, intellectual property rights or any other rights with respect to Epson products owned by Epson or any third parties.
4. Epson is committed to constantly improving quality and reliability, but semiconductor products in general are subject to malfunction and failure. By using Epson products, you shall be responsible for your hardware. Software and systems must be designed well enough to prevent death or injury as well as any property damage even if any of the malfunctions or failures might be caused by Epson products. When designing your products using Epson products, please be sure to check and comply with the latest information regarding Epson products (this document, specifications, data sheets, manuals, Epson's web site, etc.). When using the information included above materials such as product data, charts, technical contents, programs, algorithms and application circuit examples, you shall evaluate your products both on a stand-alone basis as well as within your overall systems. You shall be solely responsible for deciding whether or not to adopt and use Epson products.
5. Epson has prepared this document and programs provided in this document carefully to be accurate and dependable, but Epson does not guarantee that the information and the programs are always accurate and complete. Epson assumes no responsibility for any damages which you incur due to misinformation in this document and the programs.
6. No dismantling, analysis, reverse engineering, modification, alteration, adaptation, reproduction, etc., of Epson products is allowed.
7. Epson products have been designed, developed and manufactured to be used in general electronic applications (office equipment, communications equipment, measuring instruments, home electronics, etc.) and applications individually listed in this document ("General Purpose"). Epson products are NOT intended for any use beyond the General Purpose uses that requires particular/higher quality or reliability in order to refrain from causing any malfunction or failure leading to death, injury, serious property damage or severe impact on society, including, but not limited to those listed below. Therefore, you are advised to use Epson products only for General Purpose uses. Should you desire to buy and use Epson products for a particular purpose other than a General Purpose uses, Epson makes no warranty and disclaims with respect to Epson products, whether express or implied, including without limitation any implied warranty of merchantability or fitness for any particular purpose. Please be sure to contact our sales representative and obtain approval in advance.

Particular purpose

Space equipment (artificial satellites, rockets, etc.)

Transportation vehicles and their control equipment (automobiles, aircraft, trains, ships, etc.)

Medical equipment (other than applications individually listed in this document) / Relay equipment to be placed on ocean floor Power station control equipment / Disaster or crime prevention equipment / Traffic control equipment / Financial equipment Other applications requiring similar levels of reliability as those listed above

8. Epson products listed in this document and our associated technologies shall not be used in any equipment or systems that laws and regulations in Japan or any other countries prohibit to manufacture, use or sell. Furthermore, Epson products and our associated technologies shall not be used for developing weapons of mass destruction, or any other military purposes or applications. If exporting Epson products or our associated technologies, you shall comply with the Foreign Exchange and Foreign Trade Control Act in Japan, Export Administration Regulations in the U.S.A. (EAR) and other export-related laws and regulations in Japan and any other countries and follow the required procedures as provided by the relevant laws and regulations.
9. Epson assumes no responsibility for any damages (whether direct or indirect) caused by or in relation with your non-compliance with the terms and conditions in this document.
10. Epson assumes no responsibility for any damages (whether direct or indirect) incurred by any third party that you assign, transfer, loan, etc., Epson products to.
11. For more details or other concerns about this document, please contact our sales representative.
12. Company names and product names listed in this document are trademarks or registered trademarks of their respective companies.

Overview

The S5U1C17M03T (SVT board) is equipped with a 16-bit MCU S1C17M03 for Seiko Epson digital multimeters (DMM).

The SVT board is equipped with the functions required for a DMM and can measure voltage, current, resistance, capacitance, continuity check, diodes, and frequencies.

1.1 Board external view

Figure 1.1.1 shows an external view of the SVT board.

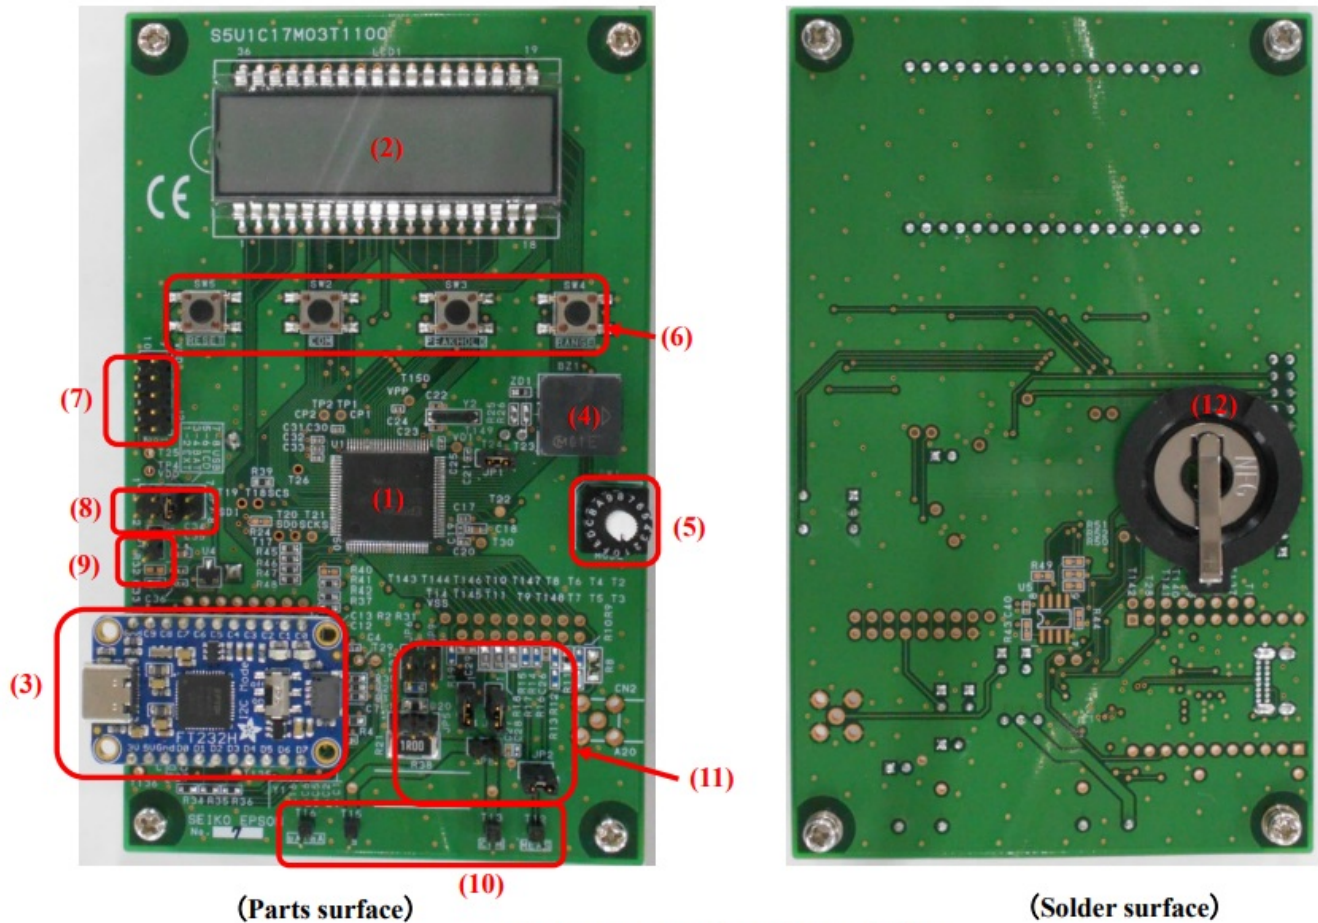


Figure1.1.1 SVT board external view

<p>(1) S1C17M03 16-bit MCU</p> <p>(2) LCD module 8digits 14segments / digit</p> <p>(3) USB⇔SPI bridge IC module USB Type-C connector</p> <p>(4) Piezo electric buzzer</p> <p>(5) Mode switching rotary switch</p> <p>(6) Tactile switch</p>	<p>(7) S5U1C17001H3 (ICDmini Ver.3 Emulator connector</p> <p>(8) Power selection connector</p> <p>(9) External power input connector</p> <p>(10) Voltage, current, resistance, capacitance, continuity check, diodes, and frequencies measurement terminal</p> <p>(11) Setting jumper pins</p> <p>(12) CR2032 button battery holder</p>
---	---

Specification

The product specifications of the SVT board are shown in Table2.1, and the measurement specifications are in Table2.2.

Table 2.1 Product specifications

Model	S5U1C17M03T
Power	EXT : External BAT : CR2032 (3V) Lithium battery x1 ICD : Emulator USB: USB VBUS
Size	W80×H130×D17.1 (Without spacers)
Weight	60g (Without battery and spacers)

Table 2.2 Measurement specification

Measurement mode	Measurement range
DC voltage	600m/6/60V *
AC voltage	600m/6/60V *
DC current	600u/6m/60mA*
AC current	600u/6m/60mA*
Resistance	600/6k/60k/600k/6M/60MΩ
Capacitance	10n/100n/1u/10u/100u/1000uF
Frequencies	5Hz – 100kHz
Continuity check	Buzzer sound below 50Ω
Diode test	Vf measurement

* The maximum input should be less than twice each measurement range.

Function

3.1 Power selection connector

The power supply can be set with JP7. Choose from the following four ways.

- EXT External power is supplied from J1.
- BAT Power is supplied from the BT1 button battery CR2023.
- ICD Power is supplied from the emulator connector J2.
- USB Power is supplied from the USB VBUS.

Table 3.1.1 JP7 Power jumper setting

Power selection	Jumper settings	Other comments
EXT	1-2 Short	DC+3V±10%, Others should be open.
BAT	3-4 Short	CR2032 x1, Others should be open.
ICD	5-6 Short	Others should be open.
USB	7-8 Short	Others should be open.

3.2 External power input connector

External power input from JP1. The power supply is DC+3.0V±10%.

Table 3.2.1 JP1 External power input

JP1 Pin No.	Signal name
1	DC+3V±10%
2	GND

3.3 Mode switching rotary switch

The rotary switch SW1 can switch the measurement mode. (Table 3.3.1 For details on the functions, refer to another “S1C17M02/M03 Application Note”.

Table 3.3.1 Mode switching rotary switch setting

SW1 No.	Measurement mode	Default range	Mode name
0	DC voltage	6V	DCV
1	AC voltage	6V	ACV
2	DC current	6mA	DCI
3	AC current	6mA	ACI
4	Resistance value (CC method)	600Ω	OHM CC
5	Resistance value (CV method)	600Ω	OHM CV
6	Continuity check	CV	CONT
7	Capacitance (CC method)	1uF	CAP CC
8	Capacitance (CV method)	10nF	CAP CV
9	Diode VF	—	DIODE
A	AC voltage frequency	6V	FREQ ACV
B	AC current frequency	6mA	FREQ ACI
C	Internal temperature	—	TEMP

※ If an unused SW1 number is selected, it will not be measured. “NOFUNC” is displayed on the LCD.

3.4 Tactile switch

The tactile switches SW2 to SW5 have the following function. (Table 3.4.1 For details on the functions, refer to another “S1C17M02/M03 Application Note”.

Table 3.4.1 Tactile switch

AC current	ACI	3	6mA	open	short	short		short	short	open
			60mA				1-2short			
Resistance value (CC method)	OHM_CC	4	600Ω	short	short	short	open	open	open	open
			6kΩ							
			60kΩ							
			600kΩ							
			6MΩ							
			60MΩ							
Resistance value (CV method)	OHM_CV	5	600Ω	short	short	short	open	open	open	open
			6kΩ							
			60kΩ							
Continuity check	CONT	6	CV	short	short	short	open	open	open	open
			CC							
Capacitance (C C method)	CAP_CC	7	1uF	short	short	short	open	open	open	open
			10uF							
			100uF							

			1000uF							
Capacitance (C V method)	CAP_CV	8	10nF	short	short	short	open	open	open	open
			100nF							
Diode VF	Diode	9	—	short	short	short	open	open	open	open
AC voltage freq uency	Freq_AC V	a	600mV	short	short	short	open	open	open	open
			6V	open						
			60V							
AC current freq uency	Freq_AC I	b	600uA	open	short	short	2-3short	short	short	open
			6mA							
			60mA				1-2short			
Temperature	Temp	c	—	open	short	short	open	open	open	open


3.6 Emulator connector


J2 is the S5U1C17001H3 ICDmini Ver.3 emulator “S5U1C17001H3” connector.

Table 3.6.1 J2 pin assignment

Pin No.	Signal name	Other comments
1	DCLK	
2	GND	Ground
3	DSIO	
4	DST2	
5	FLASH VCC OUT	Flash memory, power output for programming
6	GND	Ground
7	RSTO	Target reset output
8	VCCIN	
9	3.3V	3.3V power supply
10	N.C.	N.C.

Appendix A S5U1C17M03T SVT Board schematic

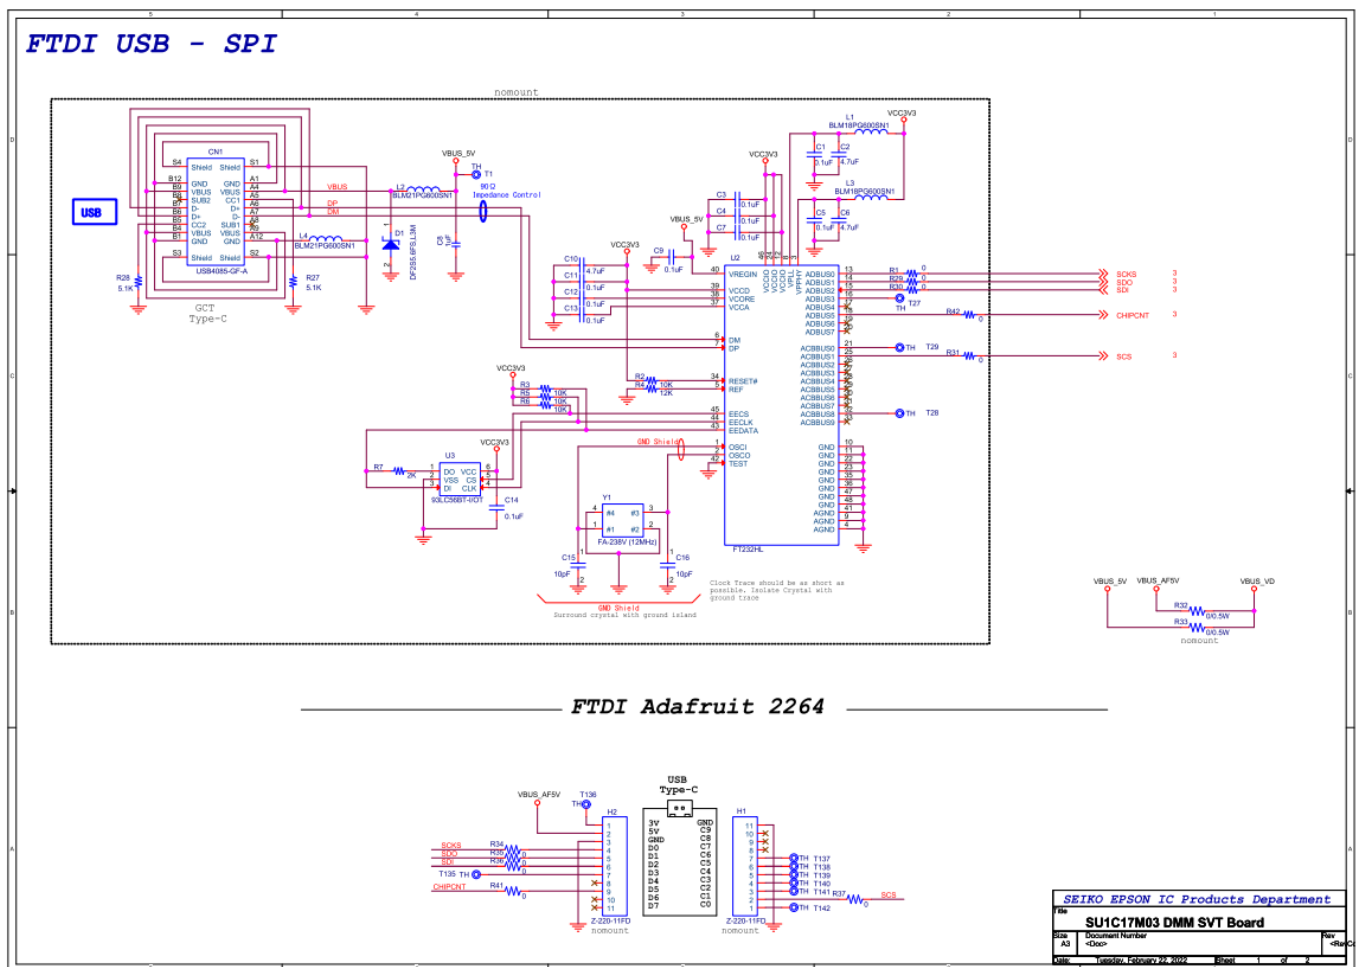

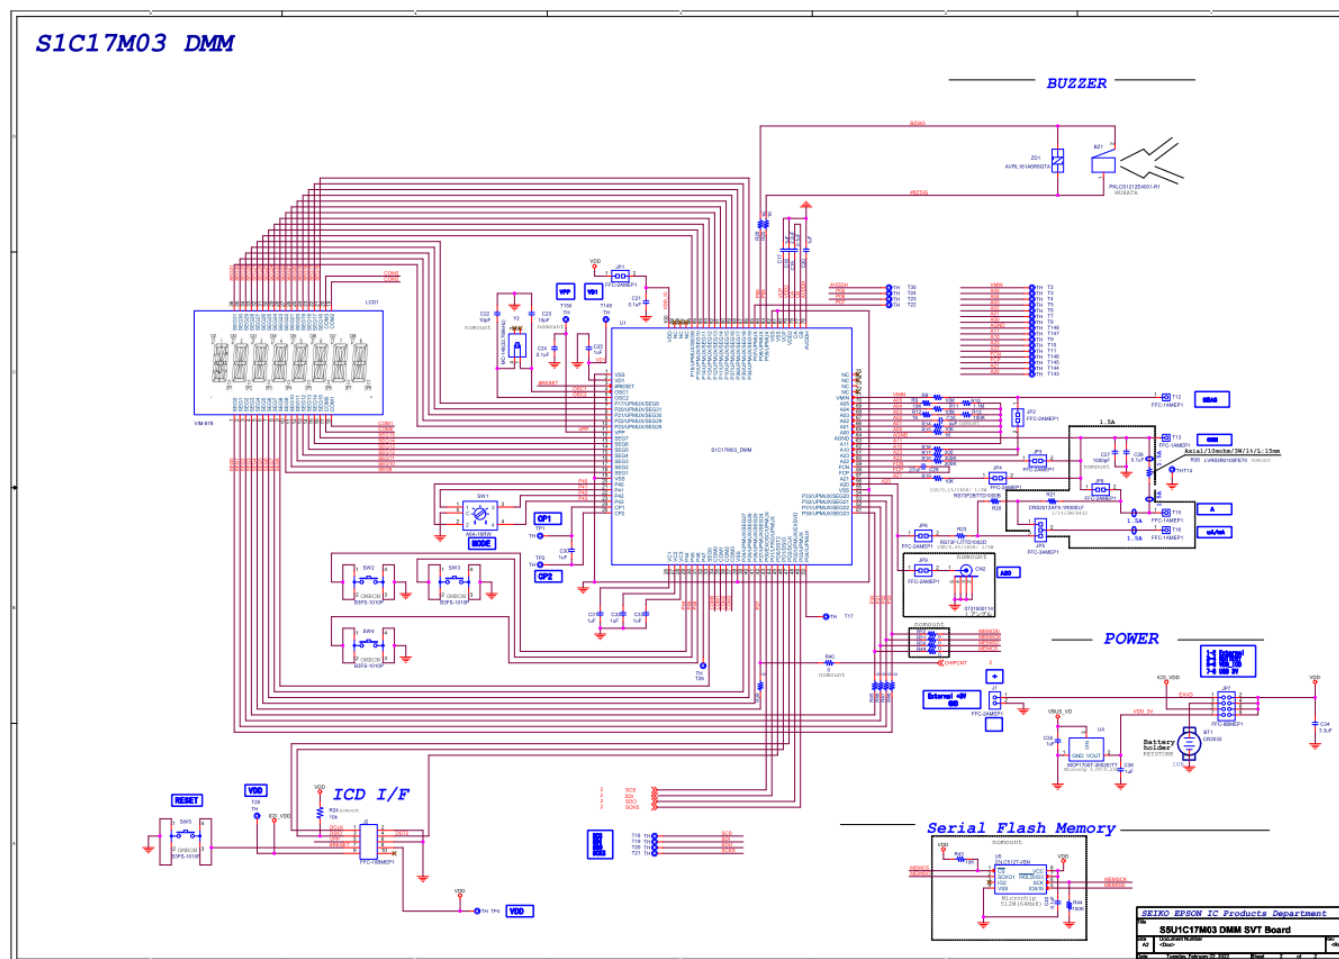

Appendix B S5U1C17M03T SVT Board Parts List

Note! Parts are subject to change without notice.

Table B.1 S5U1C17M03T SVT Board Parts List

Item	Manufacture	Part Type	Part	Reference	Quantity	mount	Other Comment
1	KEYSTONE	Battery holder	106	BT1	1		
2	MURATA	Buzzer	PKLCS1212E4001-R1	BZ1	1		
3	GCT	Connector	USB4085-GF-A	CN1	1	nomount	
4	HIROSE	Connector	A2-2PA-2.54DSA(71)	J1,JP1,JP2,JP3,JP4,JP6,JP8,JP9	8		
5	HIROSE	Connector	A2-3PA-2.54DSA(71)	JP5	1		
6	HIROSE	Connector	A1-8PA-2.54DSA(71)	JP7	1		
7	Würth Elektronik	Connector	61301021121	J2	1		
8	TE	Tactile switch	FSM4JSMATR	SW2,SW3,SW4,SW5	4		
9	OMRON	Rotary switch	A6A-16R	SW1	1		
10	EPSON	IC chip	S1C17M02_DMM	U1	1		
11	FTDI	IC chip	FT232HL	U2	1	nomount	
12	Microchip	IC chip	93LC56BT-I/OT	U3	1	nomount	
13	EPSON	Crystal	FA-238V 12.0000MB-W3	Y1	1	nomount	
14	EPSON	Crystal	MC-146 32.7680KA-AC0:RoHS	Y2	1		
15	VARITRONIX	LCD	VIM-878	LCD1	1		
16	TDK	Varistor	AVRL161A6R8GTA	ZD1	1		
17	MURATA	Ferrite bead	BLM18PG600SH1D	L1,L3	2	nomount	
18	MURATA	Ferrite bead	BLM21PG600SZ1D	L2,L4	2	nomount	
19	TOSHIBA	Diode	DF2S5.6CT,L3F	D1	1	nomount	
20	TE	Chip resistors	2-2176091-4	R20	1		
21	Bourns	Chip resistors	CRM2512-FX-1R00ELF	R21	1		
22		Chip resistors	CRHV1206AF10M0FKFT	R8	1		
23	Panasonic	Chip resistors	ERJ-PA3F1002V	R9,R14,R19,R23,R34,R35,R36,R37,R39,R41,R45,R46,R47,R48,R54	4		
24	KOA	Chip resistors	RK73Z1JTDD	R41,R45,R46,R47,R48,R54	11		
25	KOA	Chip resistors	RK73H1JTDD1002F	R2,R3,R5,R6	4	nomount	
26	KOA	Chip resistors	RK73H1JTDD1202F	R4	1	nomount	

27	KOA	Chip resistors	RK73B1JTTD202J	R7	1	nomount	
28	KEYSTONE	Chip resistors	5111	R33	1	nomount	
29	KOA	Chip resistors	MCT06030C1104FP500	R10	1		
30	KOA	Chip resistors	MCT0603PD1001DP500	R12,R15	2		
31	KOA	Chip resistors	MCT0603PD1003DP500	R13	1		
32	KOA	Chip resistors	ERJ-PB6B2000V	R16	1		
33	KOA	Chip resistors	ERJ-PB6D3003V	R17	1		
34	KOA	Chip resistors	ERJ-PB6D2003V	R18	1		
35	KOA	Chip resistors	RK73H1JTTD5101F	R27,R28	2	nomount	
36	MURATA	Chip capacitor	GRM155B31C104K	C19,C21,C24,C28	4		
37	YAGEO	Chip capacitor	CC0402KRX5R5BB475	C2,C6,C10	3	nomount	
38	MURATA	Chip capacitor	GRM155B30J105K	C17,C20,C25,C30,C31, C32,C33,C35,C36	9		
39	MURATA	Chip capacitor	GRM1552C1H100J	C15,C16	2	nomount	
40	TDK	Chip capacitor	C1608X7R1A225K080AC	C18	1		
41	MURATA	Chip capacitor	GRM1552C1H100J	C22,C23	2	nomount	
42		Chip capacitor		C26	1	nomount	
43	MURATA	Chip capacitor	GRM1552C1H102J	C27	1	nomount	
44	YAGEO	Chip capacitor	CC0603KRX7R9BB273	C29	1		
45	Samsung	Chip capacitor	CL10A335KP8NNNC	C34	1		
46	Diodes	Regulator	AP2138N-3.0TRG1	U4	1		
47		Connector		TP1,T1,TP2,T2,T3,TP4 T4,T5,T6,T7,T8,T9,T10 T11,T14,T17,T18,T19, T20,T21,T22,T23,T24, T25,,T26,T27,T28,T29 T30,T135,T136,T137, T138,T139,T140,T141, T142,T143,T144,T145, T146,T147,T148,T149, T150	45		φ 1.0
48	Molex	Connector	0731000114	CN2	1	nomount	
49	Sullins	Connector	PPPC111LFBN-RC	H1,H2	2		
50	AKIZUKI	Connector	PH-1x40SG	T12,T13,T15,T16	4		
51	Vishay	Chip resistors	RCC080510M0FKEA	R11	1		
52	Vishay	Chip resistors	LVR03R0100FE70	R38	1	nomount	
53	KOA	Chip resistors	RK73H1JTTD1002F	R24,R43	2	nomount	
54	MURATA	Chip capacitor	GRM155B31C104K	C40	1	nomount	
55	KOA	Chip resistors	RK73Z1JTTD	R40,R49,R50,R51,R52	5	nomount	
56	KOA	Chip resistors	RK73H1JTTD1003F	R44	1	nomount	
57	Microchip	IC chip	23LC512T-I/SN	U5	1	nomount	
58		Chip capacitor		C8	1	nomount	
59		Chip capacitor		C1,C5,C3,C4,C7,C9, C11,C12,C13,C14	10	nomount	
60		Chip resistors		R1,R29,R30,R31,R42, R53	6	nomount	
61	KEYSTONE	Chip resistors	5111	R32	1		
62		Chip resistors	RK73H1JTTD1001F	R25,R26	2		
63	Adafruit	Bridge board	2264	Adafruit 2264	1		

Revision History

Rev. No.	Date	Page	Category	Contents
Rev 1.0	2022/02/22	All	New	New establishment

[illegible]

International Sales Operations

America

Epson America, Inc.

Headquarter:

3131 Katella Ave.

Los Alamitos, CA 90720, USA

Phone: +1-800-463-7766

San Jose Office:

2860 Zanker Road Suite 204

San Jose, CA 95134, USA

Phone: +1-800-463-7766

Europe

Epson Europe Electronics GmbH

Riesstrasse 15, 80992 Munich,

Germany

Phone: +49-89-14005-0

FAX: +49-89-14005-110

Asia

Epson (China) Co., Ltd.

4th Floor, Tower 1 of China Central Place, 81 Jianguo Road, Chaoyang

District, Beijing 100025 China

Phone: +86-10-8522-1199 FAX: +86-10-8522-1120

Shanghai Branch

Room 601-603, Building A One East, No.325 East Longhua Road,

Shanghai 200023, China

Phone: +86-21-5330-4888 FAX: +86-21-5423-4677

Shenzhen Branch

Room 804-805, 8 Floor, Tower 2, Ali Center, No.3331

Keyuan South RD (Shenzhen bay), Nanshan District, Shenzhen

518054, China

Phone: +86-755-3299-0588 FAX: +86-755-3299-0560

Epson Taiwan Technology & Trading Ltd.

15F, No.100, Songren Rd, Sinyi Dist, Taipei City 110. Taiwan

Phone: +886-2-8786-6688

Epson Singapore Pte., Ltd.

438B Alexandra Road,

Block B Alexandra TechnoPark, #04-01/04, Singapore 119968

Phone: +65-6586-5500

FAX: +65-6271-7066

Epson Korea Co., Ltd

10F Posco Tower Yeoksam, Teheranro 134 Gangnam-gu,

Seoul, 06235, Korea

Phone: +82-2-3420-6695

Seiko Epson Corp.


Sales & Marketing Division

MD Sales & Marketing Department

29th Floor, JR Shinjuku Miraina Tower, 4-1-6 Shinjuku,

Shinjuku-ku, Tokyo 160-8801, Japan

Documents / Resources

	<p>EPSON S5U1C17M03T Cmos 16-Bit Dmm Microcontroller Board [pdf] User Manual S5U1C17M03T Cmos 16-Bit Dmm Microcontroller Board, S5U1C17M03T, Cmos 16-Bit Dmm Microcontroller Board, Microcontroller Board, Board</p>
---	--

[Manuals+](#).