



ETC Lustr Series 2 Source Four LED Profile Fixture Light User Guide

[Home](#) » [ETC](#) » ETC Lustr Series 2 Source Four LED Profile Fixture Light User Guide 

ETC Lustr Series 2 Source Four LED Profile Fixture Light







Contents

- [1 Overview](#)
- [2 Install](#)
- [3 Connect](#)
- [4 Focus](#)
- [5 Soft Focus Diffuser](#)
- [6 Address](#)
- [7 Features](#)
- [8 DMX Profiles](#)
- [9 Typical Power Consumption](#)
- [10 Customer Support](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)
- [12 Related Posts](#)

Overview

For complete information and step-by-step instructions, see the Source Four LED Profile User Manual. Download ETC documentation at etcconnect.com

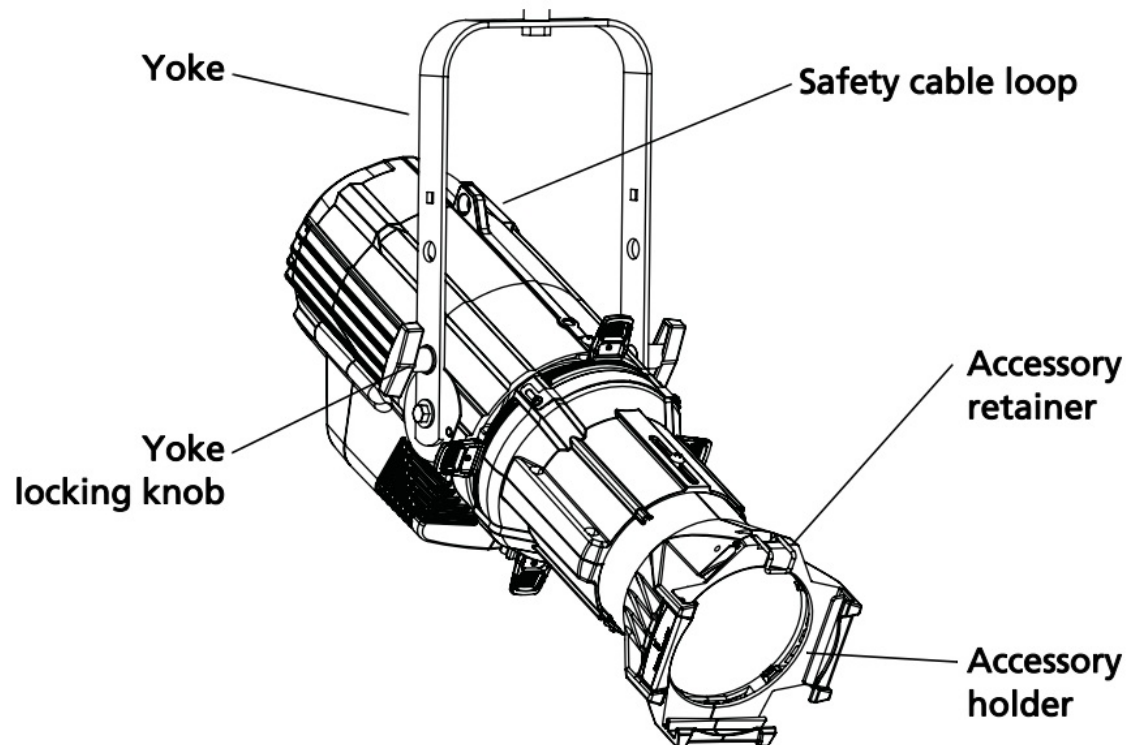

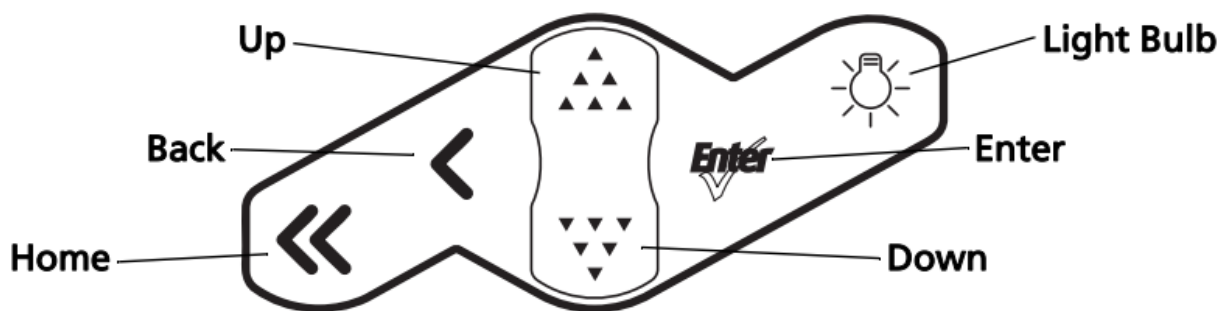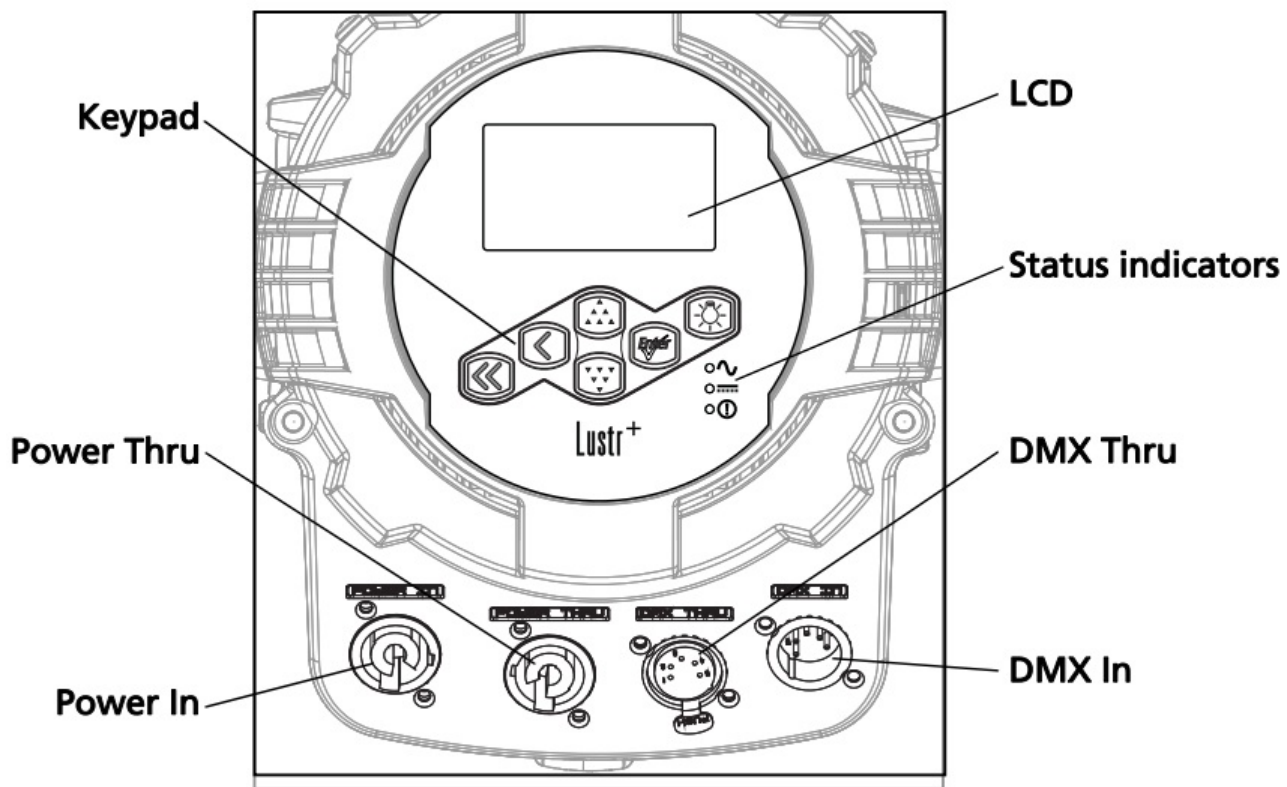

Power – Indicates AC power is On.


DMX – Indicates control signal is Active.

Error – Indicates data error, high temperature, or other unusual status.

Install

Lens Tube



1. Slide the lens tube into the shutter barrel.
2. Tighten the lens zoom knob.
3. Tighten the Phillips screw at the top of the lens barrel.

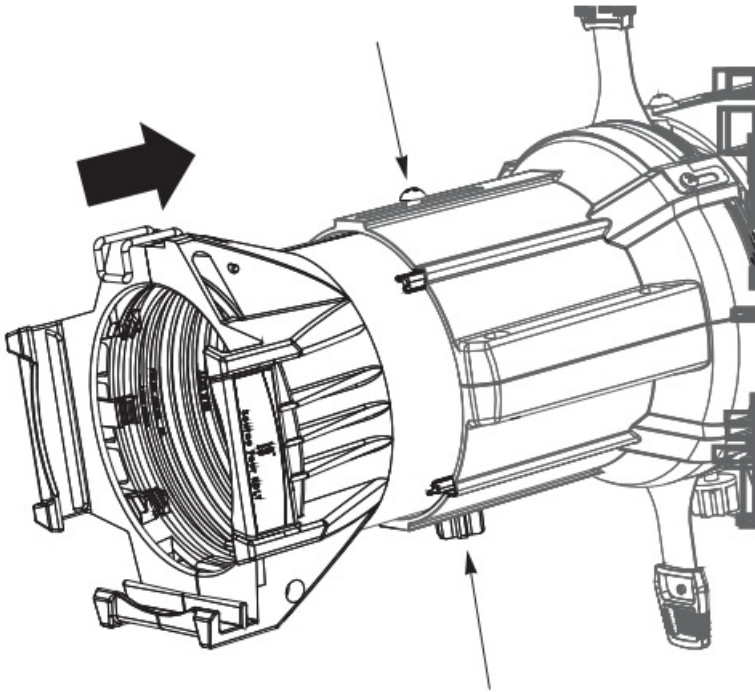

Install Fixture

1. Hang or mount the fixture.
2. Attach a safety cable.
3. Insert additional accessories such as a top hat, etc.

General use position

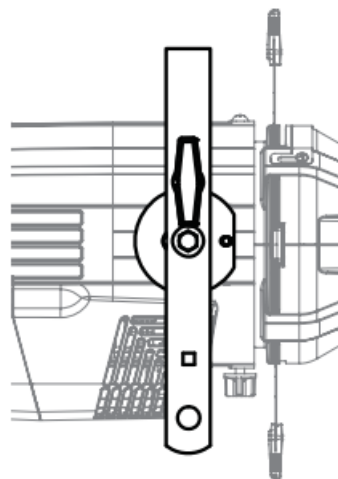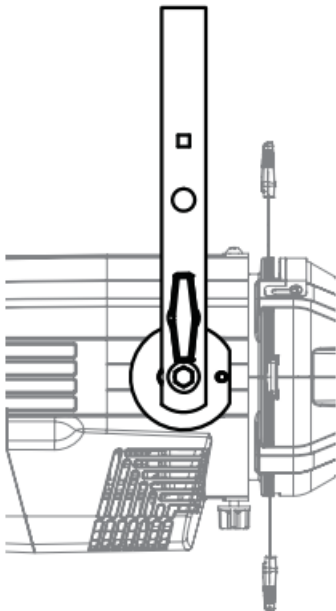

Low clearance position




WARNING:

- Use only hardware rated for total weight of fixture and accessories.
- A safety cable (or other approved safety device) must be securely attached to the safety cable loop before

loosening the clamp.

- Disconnect the unit from power and DMX and allow the fixture to cool before removing or installing the shutter barrel or other adapters, and all cleaning and maintenance.

Connect

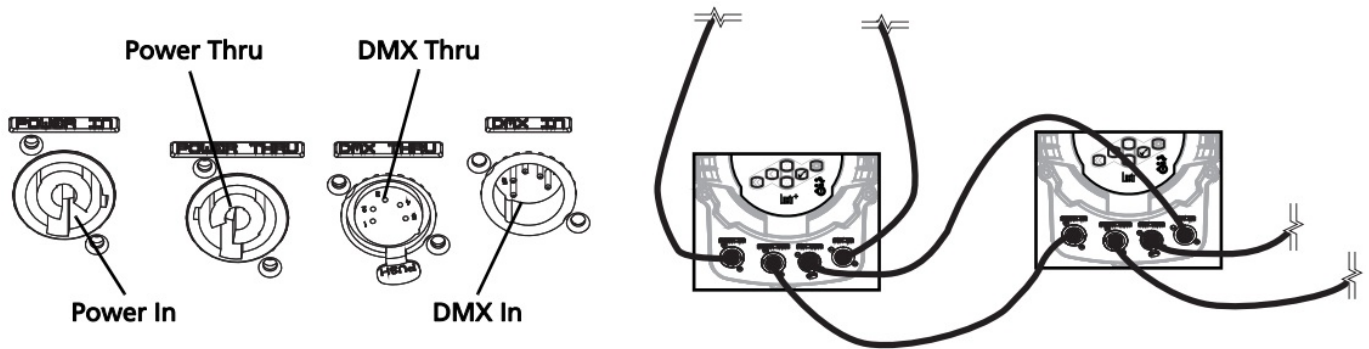


1. Attach the power cable to the Power In connector.
2. Attach the 5-pin XLR cable to the DMX In connector (if using external control).
3. Plug the XLR cable (if using) into the data source.
4. Link additional fixtures via the Power Thru and DMX Thru connectors using the following guidelines.
 - Up to nine Lustr or seven Daylight HD/Tungsten HD luminaires (15A max) may be linked via Power Thru connector (10 Lustr or 8 Daylight HD/Tungsten HD fixtures total per circuit) when used with R20 Relay Module or Unison Echo Relay Panel (consult breaker-trip curves when used with other equipment)
 - Up to 32 device loads on the DMX daisy-chain
5. Connect the power cable to AC power.





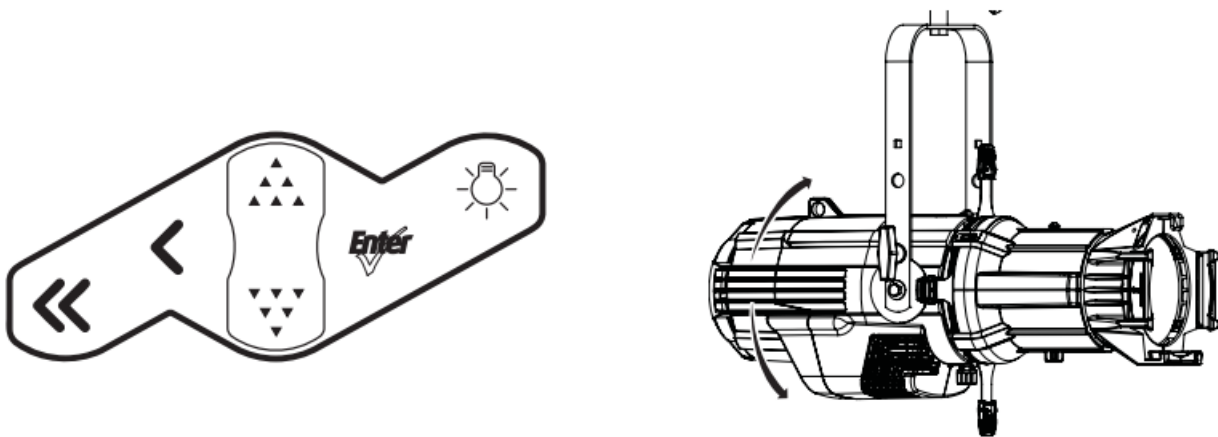

WARNING: The fixture must be connected to a non-dimmable power source in order to avoid damage to its internal power supply and other electrical components. Dimming will damage the fixture and void the warranty.

Focus




1. Supply power and wait for the fixture to boot up.

2. Press [] to open the Presets & Sequences menu.
3. Select **Focus** and press [] to turn on the LED array.
4. Adjust the fixture to the desired position.
5. Once the focus is set, press [] to turn off the LED array and then [] to return to the home screen.




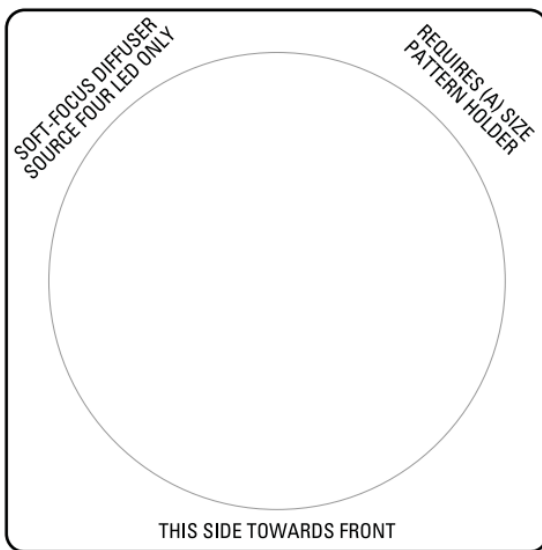


Soft Focus Diffuser

1. Install the diffuser into an A-Sized Pattern holder.
2. Install a pattern in front of the diffuser, if needed.
3. Insert the pattern holder with diffuser into the Pattern holder slot, making sure the writing on the diffuser faces the front of the fixture.



Address

A DMX address is not needed if using stand-alone or master/slave control.

1. From the home screen, press [] to open the Main Menu.
2. In the Main Menu, scroll to DMX Start Address and press [].
3. Use [] or [] to scroll to the desired fixture address.
4. Press [] to select the address number.
5. Press [] to return to the home screen.

Features

Quick Color








(Lustr+ and Series 2: Lustr, Daylight HD, Tungsten HD, and Studio HD)

Quick Color allows you to easily select a color and its intensity from a predefined menu. This feature overrides




any presets or sequences previously selected and is only available when there is no external DMX signal to the fixture.



Note: Exiting the Quick Color menu will return the fixture to the state it was in prior to entering the menu.

1. Press [] to open Presets and Sequences.
2. Scroll to Quick Color and press [].
3. Scroll to Color and press [].
4. Scroll to the desired color and press [].
5. Scroll to Intensity and press [].
6. Scroll to adjust the intensity and press [].
7. To exit Quick Color, press [].

Quick Setup

1. On the Main Menu, scroll to Quick Setups and press [].
2. Scroll to the desired setup and then press []. An asterisk (*) indicates which setup is active.
3. Press [] to return to the home screen. The top line of the home screen displays the name of the active setup.

Individual features and settings are adjustable under the Advanced menu. See the Source Four LED Profile User Manual for more information on advanced features of Source Four LED fixtures.


| Quick Set up | Description | Profile | Features |
|----------------|--|----------------|---|
| General | <ul style="list-style-type: none">• For general lighting• All-purpose settings for most lighting applications• The default setup for the Lustr+ and Series 2 Lustr | Direct control | <ul style="list-style-type: none">• Standard dimming curve• Regulated output for brightness consistency• Individual color channels plus master intensity control• Allows for native color space crossfades |

| | | | |
|--------------------|--|----------------------------------|--|
| Stage | <ul style="list-style-type: none"> • For theatrical lighting • Tungsten-like performance and precise color-control • Uses the most DMX channels of all quick setups | HSI Plus Seven e nabled | <ul style="list-style-type: none"> • Incandescent dimming curve • Regulated output for brightness consistency • White point: 3200K |
| XT Arch | <ul style="list-style-type: none"> • Longevity and reliability in applications with limited access and extreme environments • High degree of output consistency and protection against temperature swings | HSI | <ul style="list-style-type: none"> • Standard dimming curve • Protected output for high-heat environments • Reduced overall brightness • White point: 3200K |
| High Impact | <ul style="list-style-type: none"> • For concerts and high impact lighting • Enables quickest response, simple RGB control and strobe channel for maximum effect usage | RGB | <ul style="list-style-type: none"> • Quick dimming response • Boosted output for maximum intensity • Reduced consistency of output • White point: 5600K |
| Studio | <ul style="list-style-type: none"> • For video or film lighting • Enables quick, comprehensive control of white light via DMX or the fixture's onboard user interface • High-quality white-light output <p>The Studio Quick Setup is operational in all fixtures for excellent white light performance. It is the default setting for Series 2 Daylight HD, Series 2 Tungsten HD and Studio HD fixtures. In addition, Studio Quick Setup enables stand-alone operation from the User Interface on the back of the fixture if no console is present.</p> | Studio | <ul style="list-style-type: none"> • Linear dimming curve • Regulated output for brightness consistency • Variable white point 2700K–6500K • Variable + or – green (tint) with the Lustr+, Series 2 Lustr, and Studio HD |

Studio Quick Setup

From the home screen:

- To adjust the Intensity, press [▲▲▲] or [▼▼▼].
The range is 0 to 100%.
- To adjust the White Point, press [◀◀] or [Enter].
The range is 2700 to 6500K.
- To adjust the Tint, press [☀] & [◀] or [Enter].

[<] increases magenta and [] increases green.

- To return to the Main Menu, press [<<].

DMX Profiles

Lustr+ and Series 2: Lustr, Daylight HD, Tungsten HD, and Studio HD

| DMX Profile | DMX Channels | Channel Assignments | Notes |
|-------------|-----------------------|--|---|
| Direct | 10 | See Channel Assignments in Direct Mode on page 7 . | Direct control of each individual color with a separate master intensity channel. The ten- channel profile will produce the highest quality color crossfades. |
| RGB | 6 (Ch. 4 not used) | 1 – Red | Effectively addresses all seven colors via three channels of control. RGB profile will produce medium quality color crossfades. |
| | | 2 – Green | |
| | | 3 – Blue | |
| | | 4 – n/a | |
| | | 5 – Strobe | |
| | | 6 – Fan Control | |

| DMX Profile | DMX Channels | Channel Assignments | Notes |
|-------------|--------------|---------------------|--|
| HSI | 6 | 1 – Hue (coarse) | High resolution hue (two channels), saturation, and intensity control. HSI mode will produce color crossfades around the color space. |
| | | 2 – Hue (fine) | |
| | | 3 – Saturation | |
| | | 4 – Intensity | |
| | | 5 – Strobe | |
| | | | |

| | | | |
|--------|-----------------------|--|--|
| | | 6 – Fan Control | |
| HSIC | 7 | 1 – Hue (coarse) | High-resolution hue, saturation, and intensity control as above, with the addition of a color point channel to adjust the color temperature of the fixture in both white light and color. Color crossfade performance is the same as HSI. |
| | | 2 – Hue (fine) | |
| | | 3 – Saturation | |
| | | 4 – Intensity | |
| | | 5 – Strobe | |
| | | 6 – Fan Control | |
| | | 7 – Color Point (CCT) | |
| Studio | 6 (Ch. 4 not used) | 1 – Intensity | Controls fixture as a white light unit. If no DMX is present, (i.e. console input), a fixture can be adjusted for these three parameters on the U/I at the back of the unit. |
| | | 2 – Color Point (CCT) | |
| | | 3 – Tint | |
| | | 4 – n/a | |
| | | 5 – Strobe | |
| | | 6 – Fan Control | |
| Plus 7 | 7 additional channels | See <i>Plus7 Profile Options on page 7.</i> | <p>Adds seven additional color control channels in RGB, HSI, and HSIC input profile settings. For example, HSI with 'Plus Seven' enabled becomes a 15-channel profile.</p> <p>The desired color and intensity are achieved by using the HSI or RGB channels.</p> <p>Placing the Plus Seven channel at a value over 51% gives the fixture additional channels in its profile.</p> <p>Channels 9–15 represent the native colors of the fixture and allow the operator to adjust individual color channels to fine tune the color output.</p> |

| | | | |
|--------|----------------------|--|--|
| Strobe | 1 additional channel | | Variable strobe control: 0% is no strobe. The fixture output will strobe more rapidly as the strobe channel value approaches 100%. |
|--------|----------------------|--|--|

Channel Assignments in Direct Mode

| Channel Number | Series 1 Studio HD | Series 1 Lustr+ | Series 2 Lustr | Series 2 Daylight HD | Series 2 Tungsten HD |
|----------------|--------------------|-----------------|----------------|----------------------|----------------------|
| 1 | Red | Red | Red | Red | Red |
| 2 | Red Orange | White | Lime | (not used) | Red Orange |
| 3 | Mint | Amber | Amber | Mint | Mint |
| 4 | Blue | Green | Green | Blue | Blue |
| 5 | Indigo | Cyan | Cyan | Indigo | Indigo |
| 6 | n/a | Blue | Blue | n/a | n/a |
| 7 | n/a | Indigo | Indigo | n/a | n/a |
| 8 | Intensity | Intensity | Intensity | Intensity | Intensity |
| 9 | Strobe | Strobe | Strobe | Strobe | Strobe |
| 10 | Fan Control | Fan Control | Fan Control | Fan Control | Fan Control |

Plus7 Profile Options

| Channel Number | Series 1 Studio HD | Series 1 Lustr+ | Series 2 Lustr | Series 2 Daylight HD | Series 2 Tungsten HD |
|----------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| 1 | Hue (coarse) | Hue (coarse) | Hue (coarse) | Intensity | Intensity |
| 2 | Hue (fine) | Hue (fine) | Hue (fine) | White Point | White Point |
| 3 | Saturation | Saturation | Saturation | Tint | Tint |
| 4 | Intensity | Intensity | Intensity | (not used) | (not used) |
| 5 | Strobe | Strobe | Strobe | Strobe | Strobe |
| 6 | Fan Control | Fan Control | Fan Control | Fan Control | Fan Control |
| 7 | (not used) | (not used) | (not used) | (not used) | (not used) |
| 8 | Plus7 Control on/off | Plus7 Control on/off | Plus7 Control on/off | Plus7 Control on/off | Plus7 Control on/off |
| 9 | Red | Red | Red | Red | Red |
| 10 | Red Orange | White | Lime | (not used) | Red Orange |
| 11 | Mint | Amber | Amber | Mint | Mint |
| 12 | Blue | Green | Green | Blue | Blue |
| 13 | Indigo | Cyan | Cyan | Indigo | Indigo |
| 14 | (not used) | Blue | Blue | (not used) | (not used) |
| 15 | (not used) | Indigo | Indigo | (not used) | (not used) |

Tungsten and Daylight

| DMX Profile | DMX Channels | Channel Assignments | Notes |
|-------------|--------------|---------------------|--|
| Studio | 3 | 1 – Intensity | Control of parameters is also enabled from the luminaire's user interface. No console is required. |
| | | 2 – Strobe | |
| | | 3 – Fan Control | |
| Direct | 3 | 1 – Intensity | |
| | | 2 – Strobe | |
| | | 3 – Fan Control | |

Typical Power Consumption

Lustr+

| | 90V | 120V | 240V |
|----------------------------|----------------|----------------|-----------------|
| Idle Power / Current | 4.27W / 0.084A | 4.38W / 0.079A | 4.2W / 0.068A |
| 100% Boost Power / Current | 130.8W / 1.48A | 129.9W / 1.11A | 126.4W / 0.576A |

Series 2 Lustr

| | 90V | 120V | 240V |
|----------------------------|----------------|----------------|-----------------|
| Idle Power / Current | 6.77W / 0.144A | 6.9W / 0.149A | 6.5W / 0.155A |
| 100% Boost Power / Current | 173.0W / 1.94A | 171.0W / 1.44A | 168.0W / 0.783A |

Studio HD

| | 100V | 120V | 240V |
|----------------------------|----------------|----------------|-----------------|
| Idle Power / Current | 5.69W / 0.096A | 5.71W / 0.091A | 5.35W / 0.073A |
| 100% Boost Power / Current | 129.2W / 1.3A | 127.1W / 1.07A | 126.2W / 0.564A |

Daylight

| | 90V | 120V | 240V |
|----------------------------|----------------|----------------|-----------------|
| Idle Power / Current | 4.3W / 0.083A | 4.35W / 0.077A | 4.04W / 0.066A |
| 100% Boost Power / Current | 165.2W / 1.87A | 163.3W / 1.39A | 160.3W / 0.718A |

Tungsten

| | 100V | 120V | 240V |
|----------------------------|----------------|----------------|-----------------|
| Idle Power / Current | 4.3W / 0.085A | 4.35W / 0.078A | 4.0W / 0.065A |
| 100% Boost Power / Current | 159.8W / 1.81A | 157.4W / 1.35A | 154.8W / 0.695A |

Series 2 Daylight HD

| | 100V | 120V | 240V |
|----------------------------|--------------|---------------|-------------|
| Idle Power / Current | 5.58W/0.093A | 5.69W/0.088A | 4.9W/0.06A |
| 100% Boost Power / Current | 268W/2.684A | 265.2W/2.215A | 261W/1.15A |

Series 2 Tungsten HD

| | 100V | 120V | 240V |
|----------------------------|--------------|--------------|-------------|
| Idle Power / Current | 5.64W/0.095A | 5.71W/0.091A | 4.9W/0.061A |
| 100% Boost Power / Current | 223W/2.219A | 222W/1.853A | 217W/0.965A |

Customer Support

Corporate Headquarters Middleton, WI, USA | +1 608 831 4116

Global Offices London, UK | Rome, IT | Holzkirchen, DE | Paris, FR | Hong Kong | Dubai, UAE | Singapore
New York, NY | Orlando, FL | Los Angeles, CA | Austin, TX


Web etcconnect.com | **Support** support.etcconnect.com | **Contact** etcconnect.com/contactETC

© 2022 Electronic Theatre Controls, Inc. | Trademark and patent info: etcconnect.com/ip Product information and specifications subject to change. ETC intends this document to be provided in its entirety.









7460M1300-1.8.2 Rev A Released 2022-02



Documents / Resources

| | |
|---|--|
|  | <p>ETC Lustr Series 2 Source Four LED Profile Fixture Light [pdf] User Guide 7460M1300-1.8.2 rev A, Lustr Series 2 Source Four LED Profile Fixture Light, Lustr Series 2, Source Four LED Profile, Fixture Light, Source Four LED Profile Fixture Light, Light</p> |
|---|--|

References

-  [ETC - Theatre, Film, Studio and Architectural Lighting](#)
-  [Contacting ETC](#)
-  [Patents & Trademarks](#)
-  [Home - Electronic Theatre Controls Inc](#)
-  [ETC - Theatre, Film, Studio and Architectural Lighting](#)
-  [Contacting ETC](#)
-  [Patents & Trademarks](#)
-  [Home - Electronic Theatre Controls Inc](#)

Manuals+.