



# FANTECH MAXFIT61 Modular Mechanical Keyboard User Manual

[Home](#) » [fantech](#) » FANTECH MAXFIT61 Modular Mechanical Keyboard User Manual 



# FANTECH

MAXFIT61 Modular Mechanical Keyboard  
User Manual



**MAXFIT61  
MODULAR MECHANICAL KEYBOARD**

## Contents

- [1 What's included in the box](#)
- [2 System requirements](#)
- [3 Instruct manual](#)
- [4 Technical specification](#)
- [5 Size](#)
- [6 Secondary functions](#)
- [7 Software](#)
- [8 How to use](#)
- [9 How to connect](#)
- [10 Documents / Resources](#)
- [11 Related Posts](#)

## What's included in the box

1. FANTECH MAXFIT61 FROST Mechanical Keyboard
2. Switch puller
3. Keycaps puller
4. Detachable Type-C cable
5. User manual

## System requirements

1. Operating systems: Windows XP/7/8/10: MAC OS (Software only works with windows)
2. One USB 2.0/3.0 port

## Instruct manual

Thank you for purchasing FANTECH MAXFIT61 FROST MK857 Mechanical Keyboard. The MAXFIT61 FROST features hot-swappable switches for Cherry, Gateron, and Kailh branded switches. There is no need to install any drivers for your first use.

## Technical specification



- Product Name: MAXFIT61 FROST MK857
- Number of keys: 61 keys
- Switch type: Mechanical
- Anti-Ghosting: All keys
- Size: 294(L)x103(W)x42(H)mm
- Weight: 566g

Size



Secondary functions


Functions

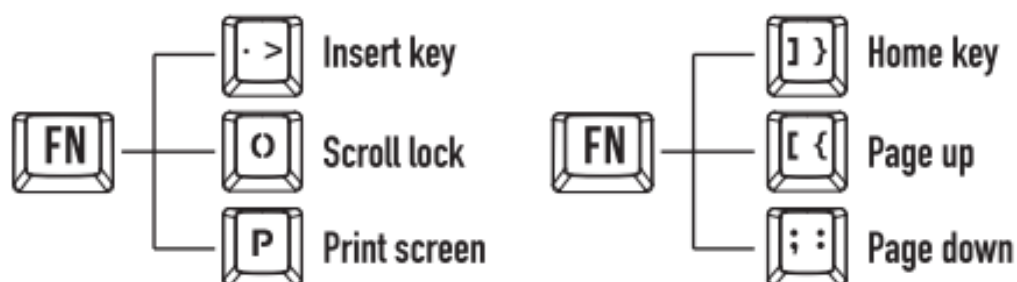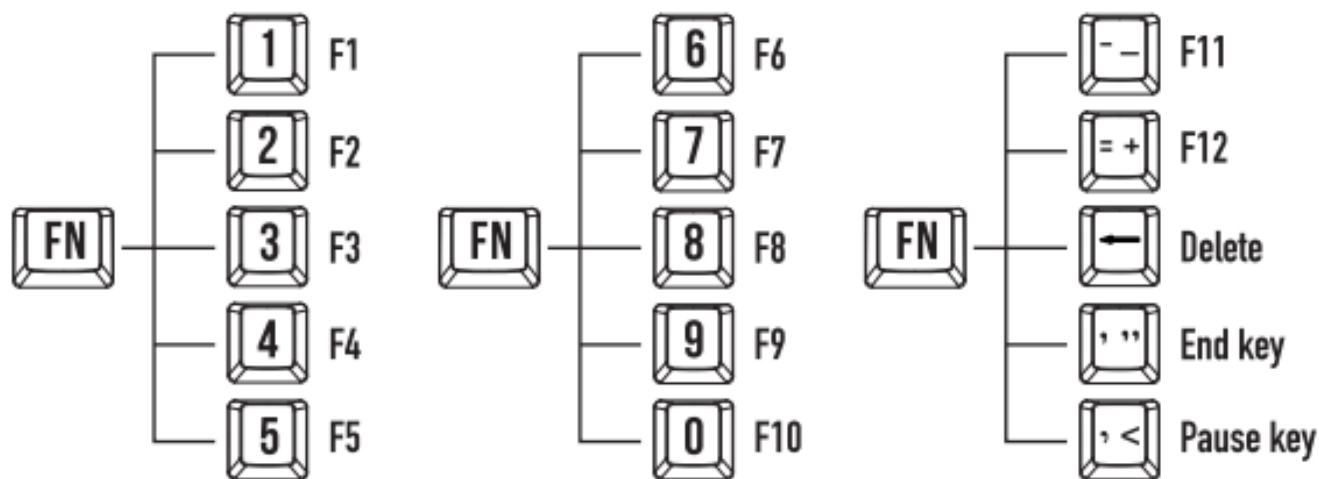

## Multimedia




## Lighting

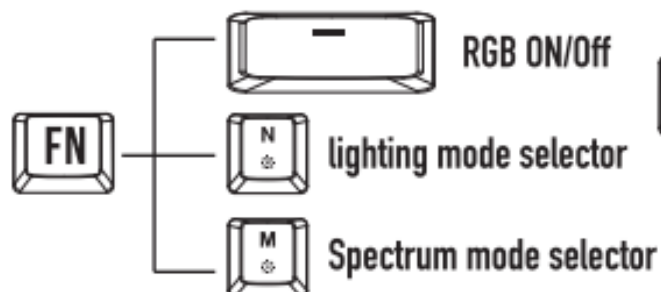

## Windows lock



## Adjusting Brightness and speed

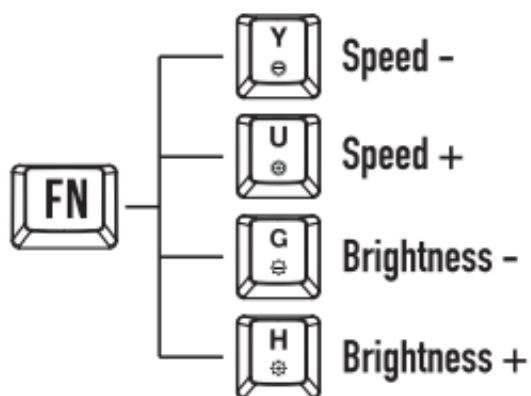

## Switch between WIN & MAC system




## Reset



Note: The tab keys and capslock will blink 3 times when the minimum or maximum value of the LED speed or LED brightness is reached.

## Case LED

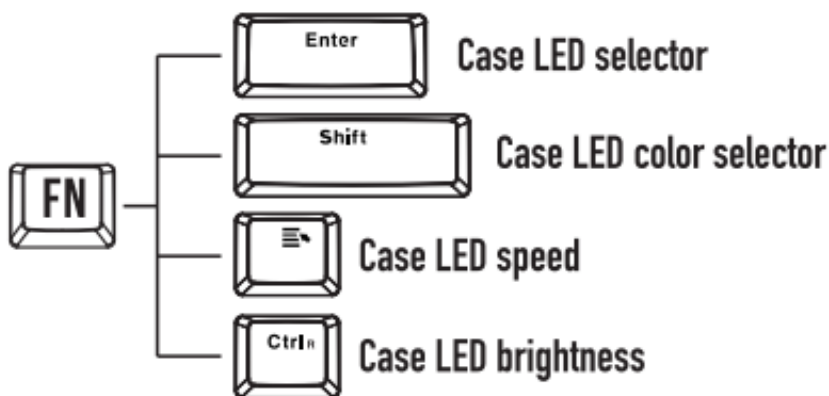

## Switch Arrow Keys



Note: FN+I,J,K,L to switch to arrow keys


## Magic FN



The magic key can copy the Function keys that give you quick access to your media player, custom function etc. By using the FN+Caps lock key, you get quick access to the multimedia key, the home page, the custom function, etc.

**Note:** The FN keys will light white LED when magic FN is ON



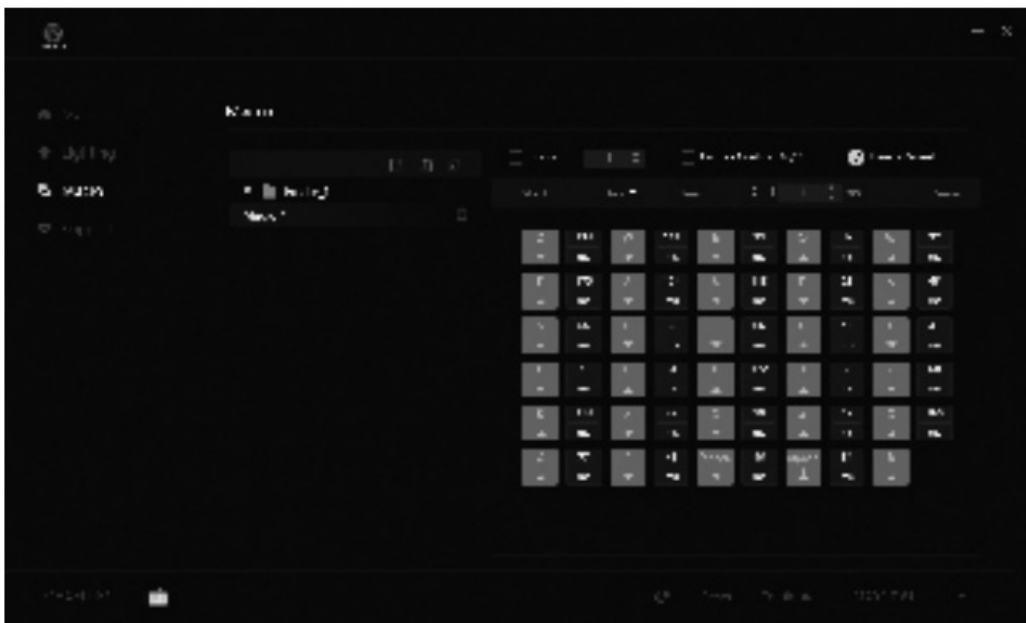


## Macro

To set up a new macro, click the “add” icon on the Macro bar, to start the macro customization. Next, click the “Start” button, which will begin the macro input process. When finished, click the “Stop” button. To save your new macro, click the “save” button after stopping the macro input. After recording the macro, you can easily edit it by clicking the input step of the macro. To do this, you can click on “add” to add more steps, or “Modify” to modify the key. After setting up the macro, return to the Main screen and click on the key to apply a macro to it.


## How to use

### Change switches and keycaps

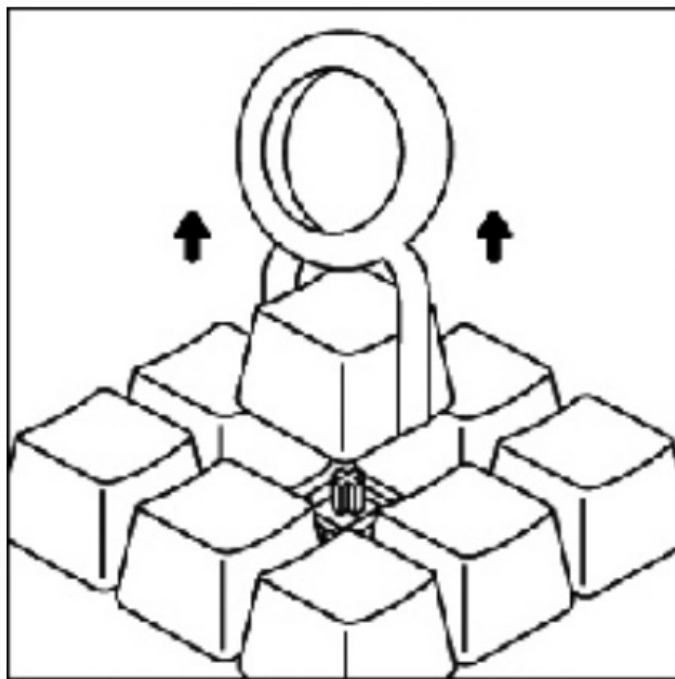

#### 1. Remove the keycap


Use the keycap puller tool to clamp on a keycap and pull upwards to detach the keycap from switch. Sometimes the switch may come out as well if the keycap is secured tightly on the switch, which is normal. For longer keys such as the space bar, always clamp and remove from the MIDDLE of the keycap.

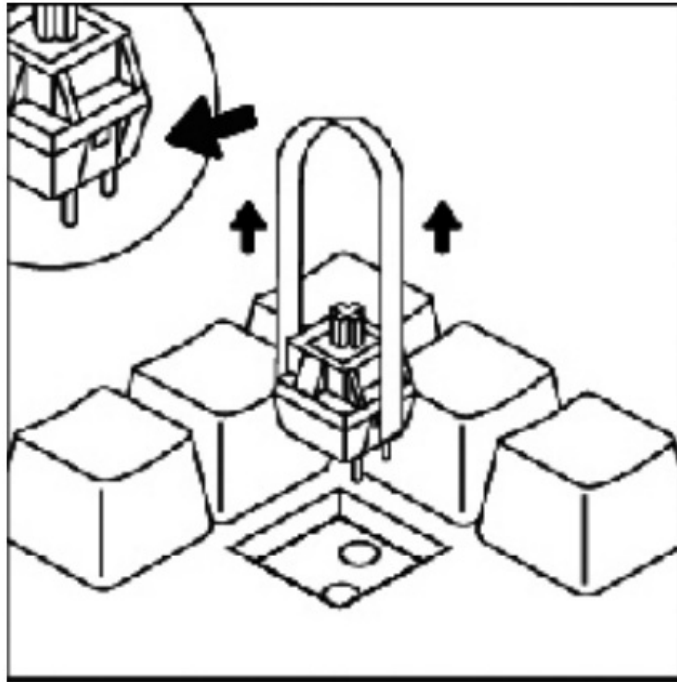

## 2. Remove the switch

Use the switch puller to push in the two tabs located on the top and bottom sides of the switch. Once they are pushed in, pull upwards to remove the switch from the keyboard case.

Warning: It is very easy to scratch your keyboard case with this tool, so take caution when removing switches!

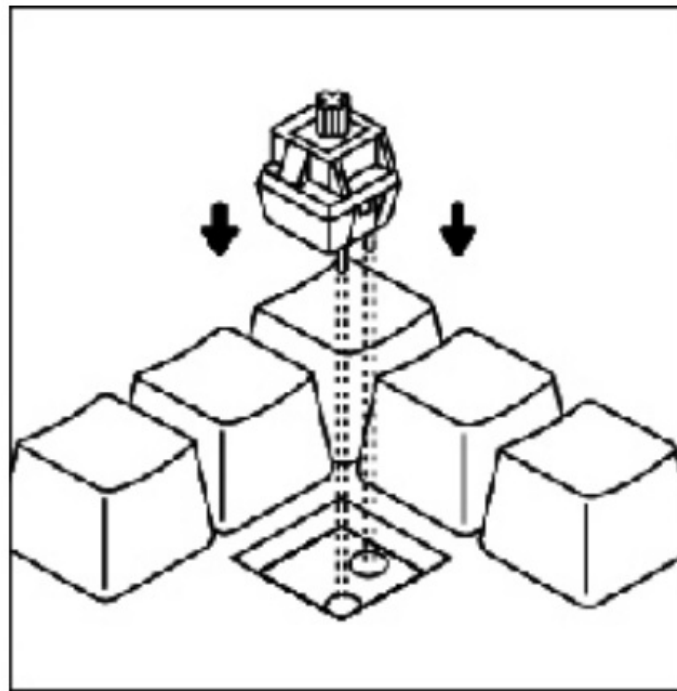


## 3. Insert switch

When inserting a new switch, align the switch to holes on the keyboard, and insert it straight down. There should be minimal resistance and the switch should pop into the frame of the keyboard. It is recommended at this time to have a Notepad ready on your PC, open it and make sure the switch works when you press it. If the switch does not light up, or the key doesn't show up on your PC when you press it, then the switch was not inserted properly. Remove the switch, and make sure the pins are straight then insert again.

\* Note: It is safe to swap switches while your keyboard is plugged into your PC




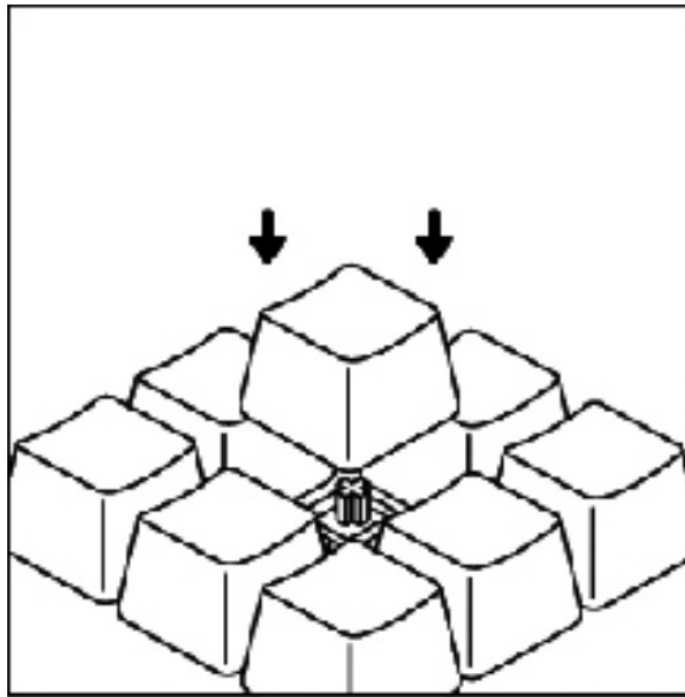


#### 4. Insert keycap

Once you have confirmed the switch was properly inserted, snap back in the appropriate keycap.

#### How to connect

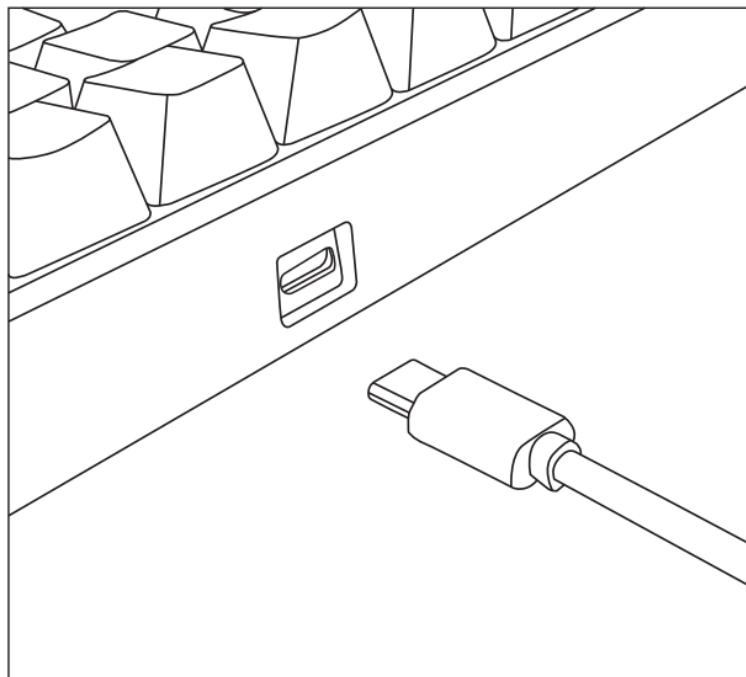


Plug in the Type-C cable to the keyboard.

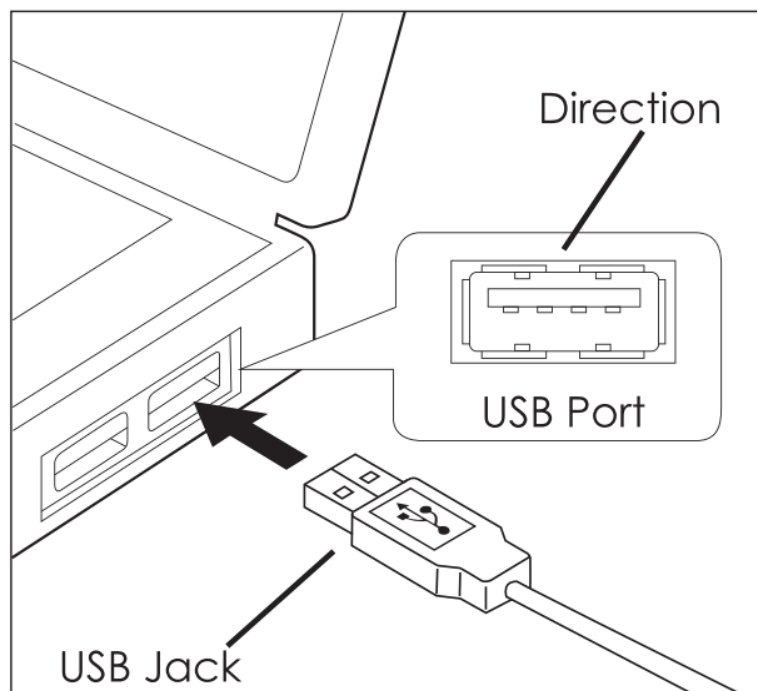

Connect the keyboard to the computer by inserting a USB jack into your computer's USB port.

## Documents / Resources



[FANTECH MAXFIT61 Modular Mechanical Keyboard](#) [pdf] User Manual  
MAXFIT61, Modular Mechanical Keyboard, MAXFIT61 Modular Mechanical Keyboard, Mechanical Keyboard, Keyboard