




FANTECH MAXFIT70 Mechanical Keyboard User Manual

[Home](#) » [fantech](#) » FANTECH MAXFIT70 Mechanical Keyboard User Manual 

Contents

- [1 FANTECH MAXFIT70 Mechanical Keyboard](#)
- [2 What's included in the box](#)
- [3 System requirements](#)
- [4 INTRODUCTION](#)
- [5 Technical specification](#)
- [6 SIZE](#)
- [7 Secondary functions](#)
- [8 How to use](#)
 - [8.1 Change switches and keycaps](#)
- [9 How to connect](#)
- [10 SOFTWARE](#)
- [11 Documents / Resources](#)
- [12 Related Posts](#)



FANTECH MAXFIT70 Mechanical Keyboard



What's included in the box

1. FANTECH MAXFIT70 Mechanical Keyboard
2. Switch Puller & Keycaps Puller

3. Extra Keycaps
4. Detachable Type-C Cable
5. 10x Top Mount Screw
6. User Manual

System requirements

1. Operating systems: Windows XP/7/8/10/11; MAC OS (Software only works with windows)
2. One USB 2.0/3.0 port

INTRODUCTION

Thank you for purchasing FANTECH MAXFIT70 MK911 Mechanical Keyboard. MAXFIT70 features hotswappable sockets which are compatible with Cherry, Gateron, Kailh and other switches, as well as featuring a premium macro knob for easy control of your PC. The exploded layout design allows for easy typing, as well as BT5.0 + StrikeSpeed+ USB connection modes. Get your game on with MAXFIT70!

Technical specification

- **Number of keys:** 70 keys
- **Switch type:** Mechanical
- **Anti-Ghosting:** Alleys
- **Connection:** Wired, StrikeSpeed, BT5.0 (Up to 5 devices)
- **Battery Capacity:** 2500mAh
- **Battery Life:** Up to 100 hours with RGB OFF Up to 12 hours with RGB ON
- **Wireless Distance:** Up to 10m
- **Size:** 345(L)x116(W)x40 (H)mm
- **Weight:** 563g

SIZE



Secondary functions

Keys Combination	Windows	Mac
Fn+Esc	~	
Fn+1	F1	
Fn+2	F2	
Fn+3	F3	
Fn+4	F4	
Fn+5	F5	
Fn+6	F6	
Fn+7	F7	
Fn+8	F8	

Fn+9	F9
Fn+0	F10
Fn+-	F11
Fn+=	F12
Fn+Q	Press: To switch to BT1 mode Press & hold: To start Pairing BT1
Fn+W	Press: To switch to BT2 mode Press & hold: To start Pairing BT2
Fn+E	Press: To switch to BT3 mode Press & hold: To start Pairing BT3
Fn+R	Press: To switch to StrikeSpeed mode Press & hold: To start Pairing StrikeSpeed
Fn+T	Switch to wired mode
Fn+O	Print Screen
Fn+P	Scroll Lock

Kombinasi Keys	Windows	Mac
Fn+[Pause Break	
Fn+L	Home	
Fn+;	End	
Fn+A	Play/Pause	
Fn+S	Previous Track	
Fn+D	Next Track	
Fn+F	Mute	
Fn+H	Volume -	
Fn+G	Volume +	


Fn+L_Win	Win Lock
Ctrl+L_Alt+Q	Press & Hold to Reset to Default
Fn+L_Alt	Press & Hold to change to Mac/Windows Mode
Fn+Backspace	Check Battery
Fn+Ins	Spectrum Mode Selector
Fn+Page Up	Single Color Selector
Fn+Page Down	RGB ON/OFF
Fn+Up Arrow	Spectrum Brightness+
Fn+Down Arrow	Spectrum Brightness -
Fn+Right Arrow	Spectrum Speed+
Fn+Left Arrow	Spectrum Speed-

How to use

Change switches and keycaps

1. Remove keycap


Use the keycap puller tool to clamp on a keycap and pull upwards to detach keycap from switch. Sometimes the switch may come out as well if the keycap is secured tightly on switch, which is normal. For longer keys such as the space bar, always clamp and remove from the MIDDLE of the keycap.

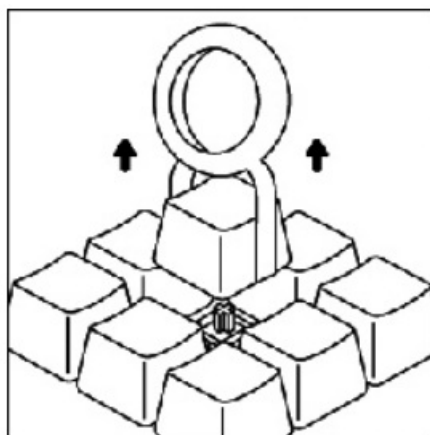

2. Remove switch

Use the switch puller to push in the two tabs located on the top and bottom side of the switch. Once they are pushed in, pull upwards to remove switch from keyboard case.


Warning: It is very easy to scratch your keyboard case with this tool, so take caution when removing switches!

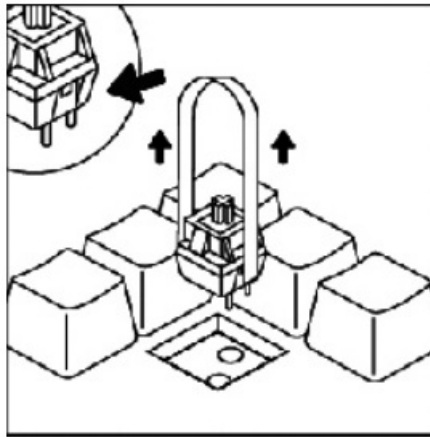

3. Insert switch


When inserting a new switch, align switch to holes on the keyboard, and insert straight down. There should be minimal resistance and the switch should pop into the frame of the keyboard. It is recommended at this time to have a Notepad ready on your PC, open it and make sure the switch works when you press it. If the switch does not light up, or the key doesn't show up on your PC when you press it, then the switch was not inserted properly. Remove switch, and make sure pins are straight then insert again.

Note: It is safe to swap switches while your keyboard is plugged in to your PC

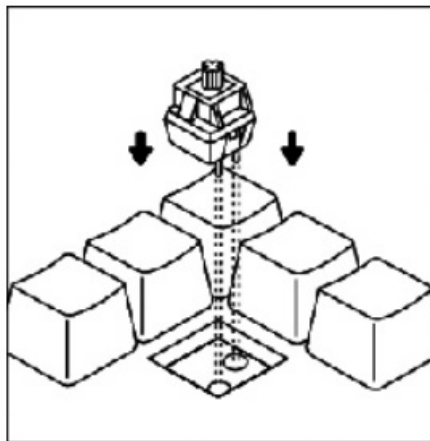

4. Insert keycap



Once you have confirmed the switch was properly inserted, snap back in the appropriate keycap.

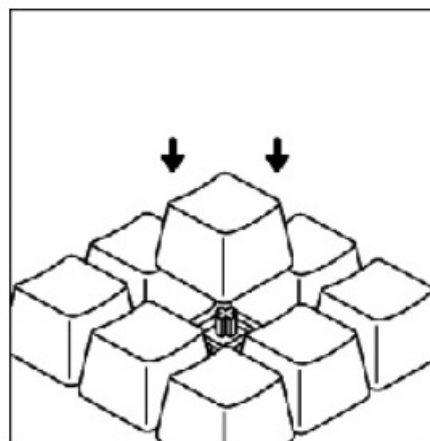

How to connect


- Plug in the Type-C cable to the keyboard, then connect the keyboard to computer by inserting USB jack to your

computer USB port. Press FN+T 3s to activate wired mode, after it connects the white indicator will light.

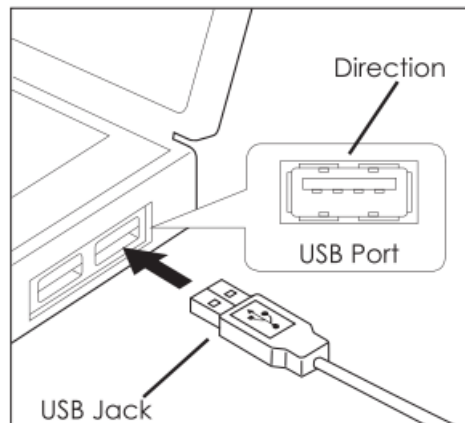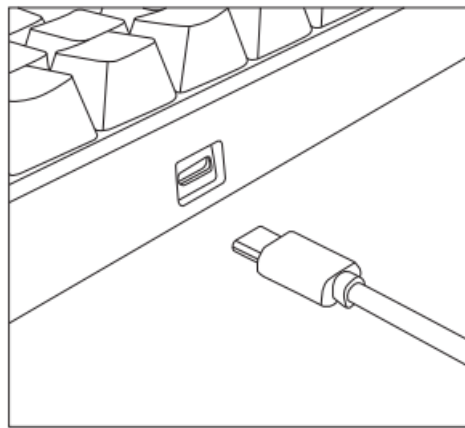


- **StrikeSpeed Mode:**

Plug in the USB receiver to the computer USB port. Press FN+4 to activate StrikeSpeed mode, after it connects, the white indicator will light. If it doesn't connect in 30 sec, the indicator light stop flashing and the keyboard enter sleep mode.

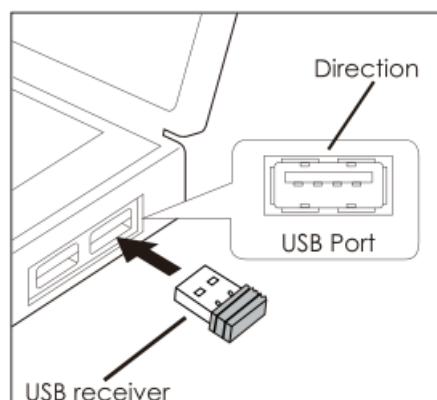


- **BT Mode:**

Maxfit70 can connect up to 3 BT devices simultaneously via combination key, connect the BT by hold FN+Q / FN+W/ FN+E for 5 seconds. Then, navigate to your devices BT settings, and begin the pairing process. In pairing process the indicator will keep flashing. After connected the indicator will always light.

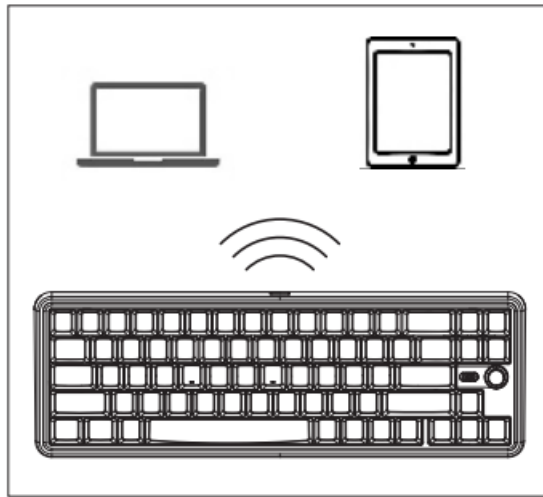

Download our Manual / Software from our official website www.fantechworld.com

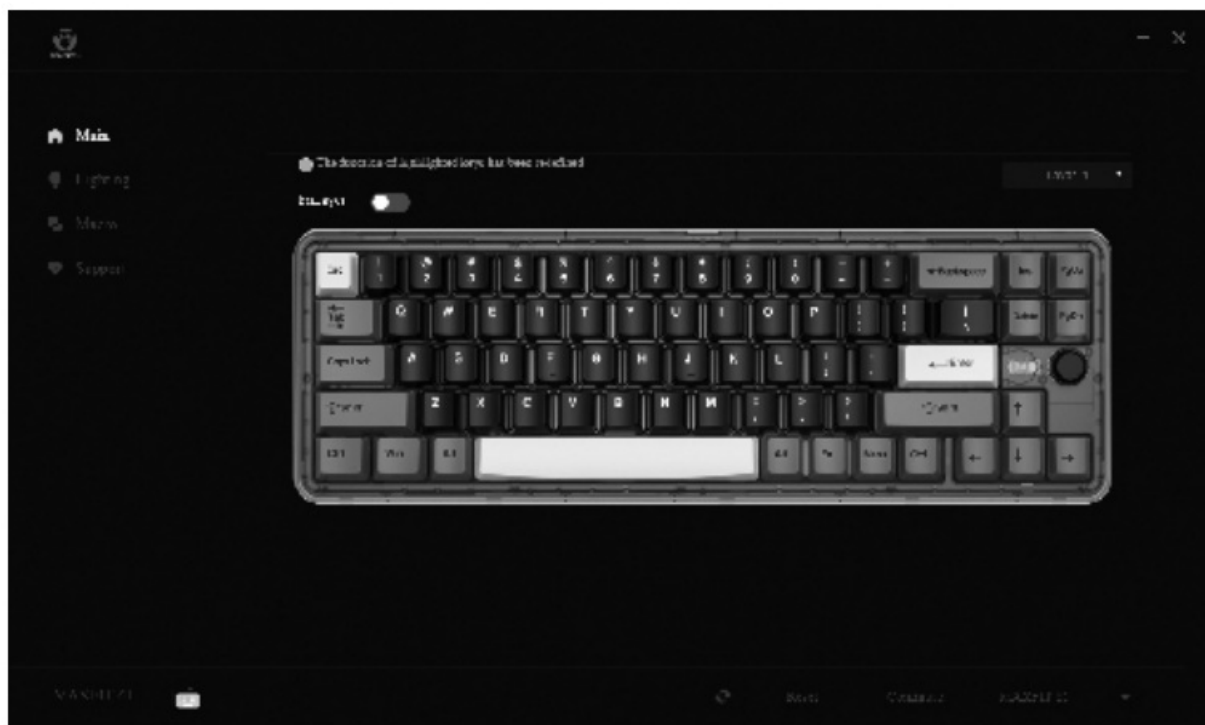

SOFTWARE

• Main

- On the main screen, you can customize the keyboard's keys and set macros, by clicking on the keys. You also can customize the FN layers.
- You can customize another layer of macro by turning on Fn Layer features.
 1. Set or record the combination keys for the selected keys.
 2. To activate the keys by pressing Fn + selected keys.



• Lighting

- On this screen, you can customize up to 22 lighting modes, and even set the speed and brightness on some.




- On this section, you can customize the sleep time of your keyboard and also light OFF when you are away from your computer.




• Macro

- To set up a new macro, click the “add” icon on the Macro bar, to start the macro customization.
- Next, click the “Start” button, which will begin the macro input process. When finished, click the “Stop” button.
- To save your new macro, click the “save” button after stopping the macro input.

- After recording the macro, you can easily edit it by clicking the input step of the macro. To do this, you can click on “add” to add more steps, or “Modify” to modify the key.
- After setting up the macro, return to the Main screen and click on a key to apply a macro to it.
- **Loop**
You can set the macro looping number
- **Button control On/Off**
Auto looping start once keys was pressed and end when the keys was pressed again.
- **Touch repeat**
Auto looping start upon holding and pressing the keys, it will end once you let go the key press

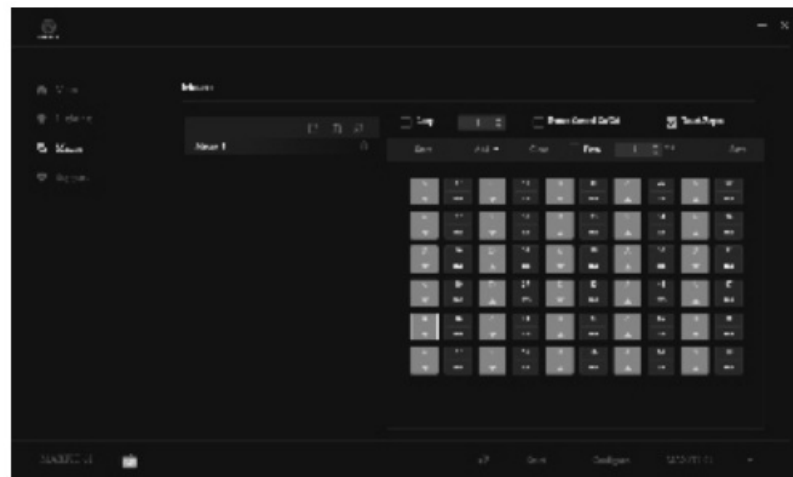

Documents / Resources



[FANTECH MAXFIT70 Mechanical Keyboard](#) [pdf] User Manual
MAXFIT70 Mechanical Keyboard, MAXFIT70, Mechanical Keyboard, Keyboard