Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

EZ-FIT FIREPLACE DOORS 42" Models

EZ-FIT FIREPLACE DOORS Heatilator Prefab Fireplace Door Instruction Manual

For 42-inch Models: DX42, DX42AI, E42, EC42, HB42A, HB42AI, HD42B, HD42BI, ST42A, TD42B

1. Introduction

This manual provides comprehensive instructions for the installation, operation, and maintenance of your EZ-FIT FIREPLACE DOORS Heatilator Prefab Fireplace Door. Designed for specific Heatilator models, this door offers enhanced safety, improved efficiency, and a modern aesthetic for your fireplace. Please read all instructions carefully before proceeding with installation or use.

Important Safety Notice: Fireplace doors must be fully opened while the fire is actively burning to prevent glass damage and ensure proper ventilation.

2. Product Compatibility

The EZ-FIT Fireplace Door is specifically designed for certain Heatilator prefab/zero-clearance fireplace models. It is crucial to verify your fireplace's model number to ensure compatibility.

2.1 Identifying Your Fireplace Model

Locate the metal tag inside your firebox. This tag contains the make and model number of your Heatilator fireplace. The EZ-FIT Fireplace Door for 42-inch models is compatible with the following Heatilator models:

- DX42
- DX42AI
- E42
- EC42
- HB42A
- HB42AI
- HD42B
- HD42BI
- ST42A
- TD42B



Figure 1: A person examining the metal tag located inside the firebox, which displays the make and model number of the Heatilator fireplace.

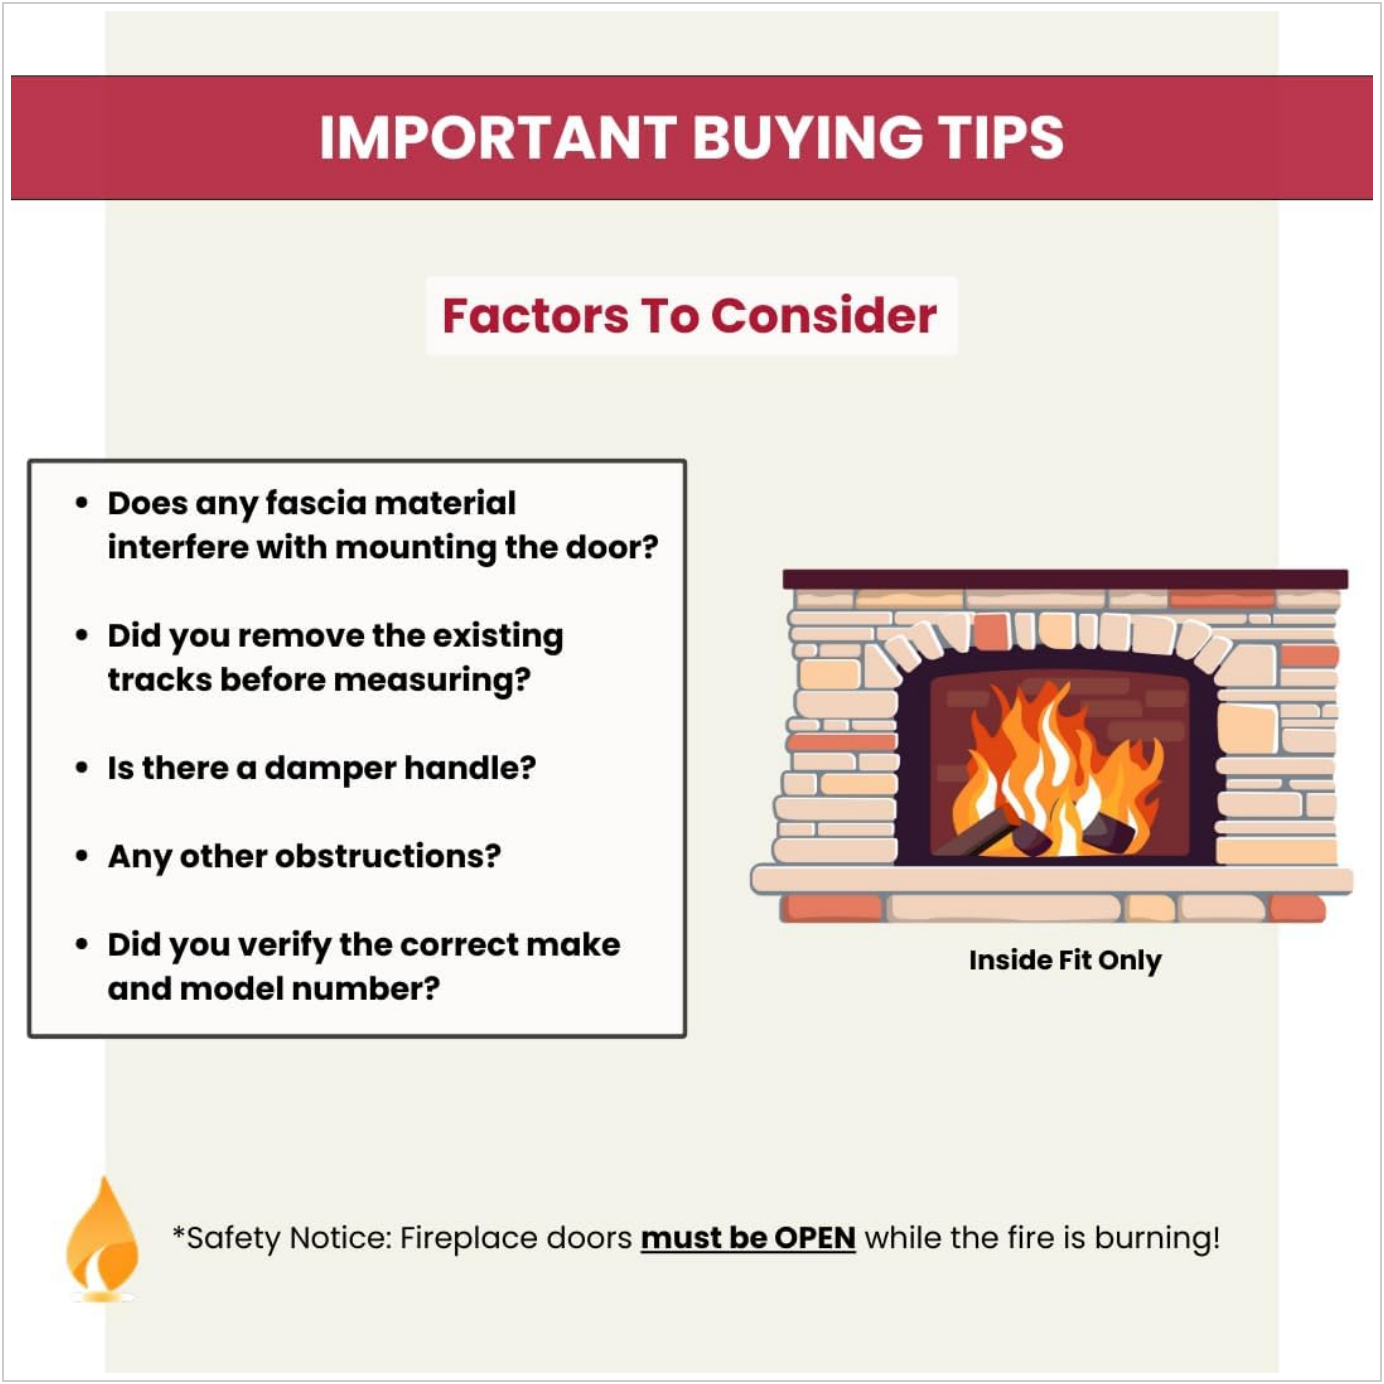


Figure 2: A table listing various Heatilator fireplace model numbers and their compatible opening sizes, crucial for correct product selection.

2.2 Fit Note

The listed dimensions (42" x 20 15/16") correspond to the fireplace opening size. The actual product dimensions you receive may be slightly smaller (up to 1/4") to accommodate installation adjustments. Evenly spaced gaps on either side of the doors are intentionally designed to ensure optimal functionality and reduce heat loss. These size adjustments are tailored to your specific model and are not defects.



Figure 3: A visual representation indicating that the fireplace door is custom-designed to fit specific Heatilator model numbers, ensuring a precise fit.

3. Product Features

The EZ-FIT Fireplace Door is a custom-built unit featuring a sleek design and robust construction for long-lasting performance.

- **Frame:** 1 1/8" matte black anodized-aluminum frame.
- **Glass:** Tempered 3/16" clear safety glass with safe finished edges.
- **Doors:** Smooth-operating tracked bi-fold doors that open a full 90 degrees.
- **Efficiency:** Designed to prevent cold drafts and help retain heat, contributing to energy savings.

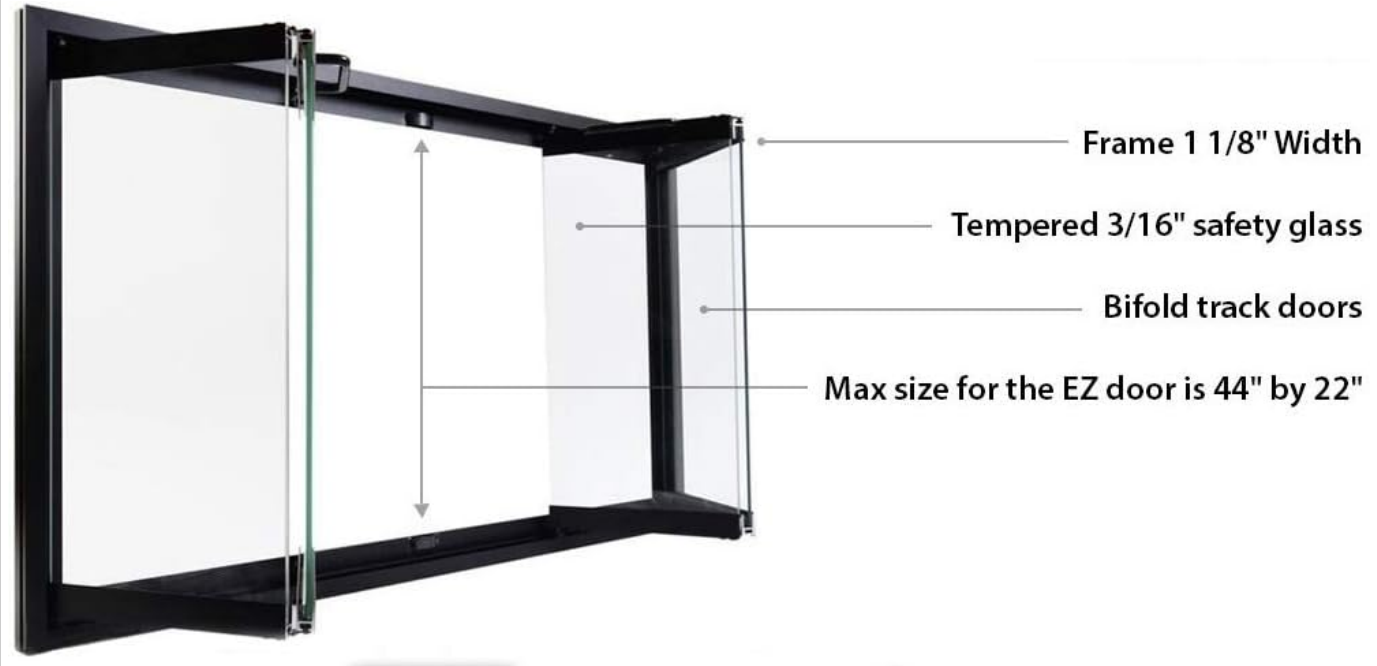


Figure 4: An annotated image detailing the key components of the fireplace door, including the frame width, tempered safety glass thickness, and the bi-fold track door mechanism.



Figure 5: The fireplace door closed, with a red arrow illustrating how it prevents cold drafts from entering the room, contributing to energy efficiency.



Figure 6: A detailed view of the fireplace door's matte black anodized-aluminum frame, highlighting its sleek, low-profile design.

4. Installation Guide

Installation of the EZ-FIT Fireplace Door is designed to be straightforward, requiring minimal tools.

4.1 Tools Required

- Screwdriver (Philips head recommended)
- Drill with appropriate drill bit (if pre-drilling is necessary)

4.2 Pre-Installation Checklist

- Verify your fireplace make and model number.
- Ensure any existing tracks or spark curtains are removed if they interfere with the new door's installation.
- Check for any fascia material or damper handles that might obstruct the door's mounting.

4.3 Step-by-Step Installation

Follow these steps for a successful installation. For a visual guide, please refer to the installation video below.

1. Carefully unbox the fireplace door and inspect all components for any damage.
2. Position the door frame into the fireplace opening. Ensure it is centered and level.
3. Mark the locations for the mounting screws.
4. Pre-drill pilot holes if necessary, using an appropriate drill bit.
5. Secure the door frame to the fireplace using the provided screws.
6. Attach the bi-fold glass doors to the frame's clips, ensuring they operate smoothly.

Video 1: This video provides a step-by-step guide on how to install prefab fireplace doors, demonstrating the process from start to finish.

Video 2: A guide on how to accurately measure your fireplace opening to select the correct size of UniFlame fireplace doors.

Video 3: This video explains the process of ordering fireplace doors, including important measurements and considerations to ensure the right fit.



Figure 7: The EZ-FIT Fireplace Door in its closed position, showcasing the matte black frame and clear glass panels.

5. Operating Instructions

The bi-fold doors are designed for ease of use and safety.

- To open the doors, gently pull the handles outwards and fold the glass panels back.
- To close the doors, reverse the process, ensuring the panels meet securely in the center.

Safety Reminder: Always ensure the glass doors are fully open when a fire is burning in the fireplace. Closing the glass doors while a fire is active can lead to excessive heat buildup, potentially causing the glass to shatter.



Figure 8: A fireplace with logs burning, viewed through the open bi-fold glass doors and mesh screens of the EZ-FIT Fireplace Door.

6. Maintenance

Regular cleaning and maintenance will ensure the longevity and appearance of your fireplace door.

- **Glass Cleaning:** Use a non-abrasive glass cleaner specifically designed for fireplace glass. Avoid harsh chemicals that may damage the finish.
- **Frame Cleaning:** Wipe the matte black frame with a soft, damp cloth. Do not use abrasive cleaners or pads.
- **Inspection:** Periodically check all screws and connections to ensure they remain tight.

7. Troubleshooting

7.1 Door Alignment

If the bi-fold doors do not meet perfectly in the center or appear misaligned, adjustments can be made to the clips holding the doors in place. Refer to the video below for detailed instructions on adjusting door alignment.

Video 4: Learn how to properly adjust your prefab fireplace doors to ensure correct alignment and optimal functionality.

8. Specifications

Attribute	Detail
Brand	EZ-FIT FIREPLACE DOORS
Material	Glass
Color	Black
Product Dimensions	42"L x 20.93"W
Finish Type	Powder Coated
Style	Modern
Item Weight	21 pounds
UPC	656729997437
ASIN	B07NVW48FD

9. Warranty and Support

9.1 2-Year Warranty

The EZ-FIT Fireplace Door comes with a 2-year warranty against defects in materials, workmanship, and glass. This warranty ensures your product is free from manufacturing faults under normal use.

9.2 Customer Support

For any questions, measurement assistance, or warranty claims, please contact our customer support. Our team is available to provide guidance and resolve any issues you may encounter.
Proudly made in the USA.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B07NVW48FD

More documents and user manuals: **https://manuals.plus/**