




# FEIT Electric T8 Ballast Bypass Linear Lamp Installation Guide

[Home](#) » [Feit Electric](#) » FEIT Electric T8 Ballast Bypass Linear Lamp Installation Guide 



T8 BALLAST BYPASS LINEAR LAMP  
IMPORTANT SAFETY INSTRUCTIONS  
AND INSTALLATION GUIDE



120V-277V – Direct Power

REMOVE THE BALLAST

BEFORE INSTALLING THIS TUBE!

This LED lamp is NOT for use with a Fluorescent Ballast or Shop Light.



## Contents

[1 Safety Information](#)

[2 Limited Warranty](#)

[3 Bypass Assembly Instructions \(Type BJ\)](#)

[4 Documents / Resources](#)

## Safety Information

PLEASE READ THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO INSTALLATION.  
THIS LAMP REQUIRES THE BALLAST TO BE BYPASSED AND REMOVED FROM THE ELECTRICAL CIRCUIT.  
WHEN BYPASSING A BALLAST ALWAYS HAVE A QUALIFIED ELECTRICIAN DO YOUR ELECTRICAL WORK.  
This LED tube is intended to replace fluorescent tube lamps with ANSI designation F32T8 with G13 base.

1. Always follow basic safety precautions to reduce the risk of fire, electric shock and personal injury.
2. **WARNING:** To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
3. **WARNING: RISK OF SHOCK:** House electric current can cause painful shock or serious injury unless handled properly. For your safety, always remember to:
  - A. Turn OFF the power supply at the fuse or circuit breaker box before you install the lamp.
  - B. Ensure the fixture is grounded to avoid potential electric shock and to ensure reliable starting.
  - C. Wear rubber sole shoes, work on a sturdy ladder and don't touch with wet hands.
  - D. This lamp is not intended for use with emergency exits or emergency lights.
  - E. Do not make or alter any open holes in the enclosure of wiring or electrical components during kit installation.
  - F. Before installation is complete, double check all connections to be sure they are tight and correct.
  - G. Only use UL or IEC approved wire for input/output connections.
4. This lamp is designed for use in a circuit protected by a fuse or circuit breaker. It is also designed to be installed in accordance with local electrical codes. If you are unsure about your wiring, consult a qualified electrician or local electrical inspector, and check your local electrical code.
5. **WARNING: RISK OF CUTS:** To prevent wiring damage, abrasion or cuts, do not expose wiring to edges of sheet metal or other sharp objects and wear gloves.
6. Account for small parts and destroy packaging material, as these may be hazardous to children. Avoid looking directly into the lamp.



**WARNING:** Use only on 120-277 volt 60Hz circuits.

Suitable for damp locations. Do not use with dimmers. Do not touch lamp pins to the metal housing when installing.



**WARNING:** If lamp or luminaire exhibit abnormal operation (buzzing, flickering, minimal or no light, etc.), immediately turn off power and contact us for more information.



**WARNING:** Examine the luminaire (fixture) carefully before installing the lamp. Ensure the electrical lampholders (sockets) are not damaged and will make firm contact with the lamp pins. Replace damaged parts as necessary.



**WARNING:** Risk of fire or electric shock. LED retrofit kit installation requires knowledge of luminaire's electrical system. If not qualified, do not attempt installation. Contact a qualified electrician. Install this kit only in luminaires that have the construction features and dimensions shown in the photographs and/or drawings and where the rating of the retrofit kit does not exceed the input rating of the luminaire.



**WARNING:** The retrofit kit is accepted as a component of a luminaire where the suitability of the combination shall be determined by authorities having jurisdiction. Product must be installed by a qualified electrician in accordance with the applicable and appropriate electrical codes. The installation guide does not supersede local or national regulations for electrical installations.

## Limited Warranty

This product is warranted to be free from defects in workmanship and materials for up to 5 years from date of purchase. If the product fails within the warranty period, please contact Feit Electric at [into@teit.com](mailto:into@teit.com), visit [feit.com/contact-us](http://feit.com/contact-us) for instructions on replacement or refund. REPLACEMENT OR REFUND IS YOUR SOLE REMEDY. EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, ANY IMPLIED WARRANTIES ARE LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY. LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IS HEREBY EXPRESSLY EXCLUDED. Some states and provinces do not allow the exclusion of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state or province to province.

### FCC STATEMENT

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.


### Bypass Assembly Instructions (Type BJ)

#### Scan QR Code for ballast bypass instruction



<https://vimeo.com/579973279>


1. Turn off the power at the switch and fuse box or circuit breaker.
2. Cut the incoming and outgoing power wires approximately two inches from the ballast.

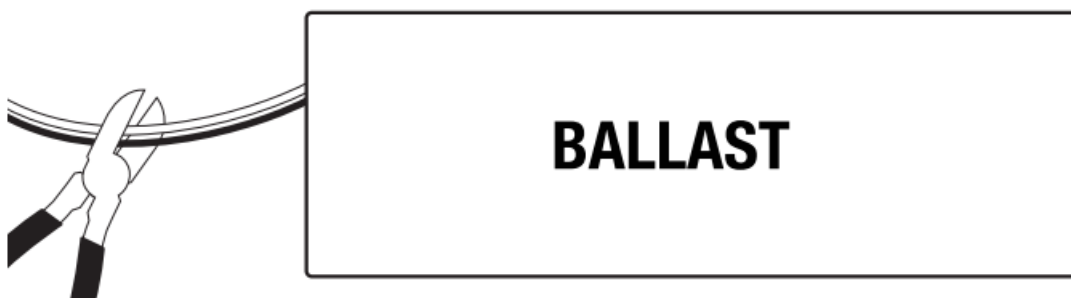


3. After removing the existing ballast, connect the live wire (L) to the wire coming from the lamp holder terminal. Next, connect the neutral wire (N) to the wire coming from the lamp holder terminal on the other side/end.

**NOTE:** Installers should not disconnect existing wires from lamp holder terminals to make new connections at lamp holder terminals. Instead, installers should cut existing lamp holder leads away from the lamp holder.

and make new electrical connections to lamp holder lead wires by employing applicable connectors.

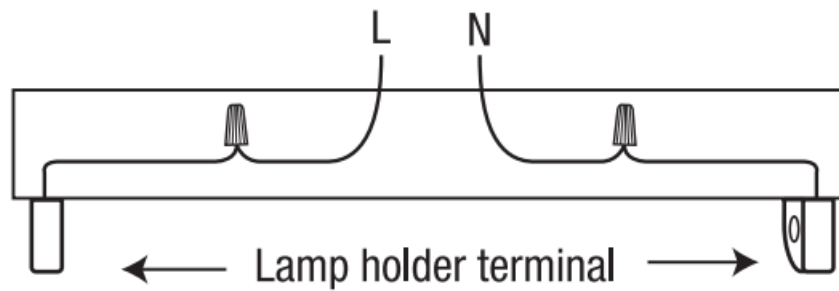

4. Install the Feit T48/850/B/LED LED tub

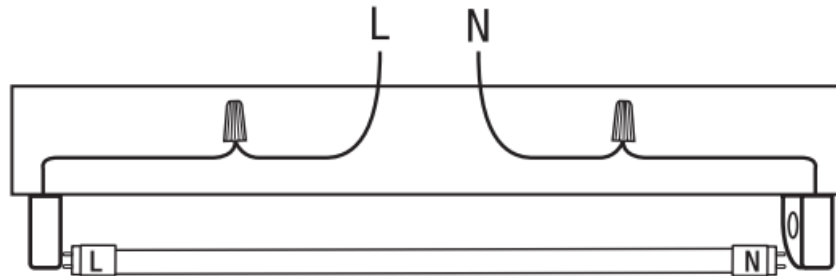

5. Turn on the power and enjoy your new Feit T48/850/B/LED LED tube.

6. After wiring modification is completed, attach the replacement cautionary label onto a visible place on the fixture that is kept visible after the installation of tubes. Remove any pre-existing labels.



#### **WARNING!**

USE LED LAMPS ONLY. THIS LUMINAIRE HAS BEEN MODIFIED TO USE LED LAMPS AND CAN NO LONGER OPERATE THE ORIGINALLY INTENDED FLUORESCENT LAMPS SAFELY. FLUORESCENT LAMPS COULD BREAK AND CAUSE PERSONAL INJURY IF USED IN THIS FIXTURE.



[WWW.FEIT.COM](http://WWW.FEIT.COM)

## **Documents / Resources**

	<p><a href="#">FEIT Electric T8 Ballast Bypass Linear Lamp</a> [pdf] Installation Guide T8 Ballast Bypass Linear Lamp, T8, Ballast Bypass Linear Lamp, Bypass Linear Lamp, Linear Lamp</p>
--	--