

**FENIX**  
E03R V2.0  
Keychain Flashlight



## FENIX E03R V2.0 Keychain Flashlight User Guide

[Home](#) » [FENIX](#) » FENIX E03R V2.0 Keychain Flashlight User Guide 

### Contents







- [1 FENIX E03R V2.0 Keychain Flashlight](#)
- [2 TECHNICAL PARAMETERS](#)
- [3 FENIX E03R V2.0 FLASHLIGHT](#)
- [4 OPERATING INSTRUCTION](#)
- [5 Documents / Resources](#)
  - [5.1 References](#)
- [6 Related Posts](#)

FENIX E03R V2.0 Keychain Flashlight

**FENIX**



## TECHNICAL PARAMETERS

ANSI/NEMA FL1	HIGH	MED	LOW	ECO	RED	RED FLASH	BREATHING LIGHT
 OUTPUT	500 lumens	150 lumens	30 lumens	5 lumens	5 lumens	5 lumens	1 lumen
 RUNTIME	1 hour 20 minutes	2 hours	6 hours 35 minutes	30 hours	/	/	/
 DISTANCE	90 meters	50 meters	20 meters	9 meters	/	/	/
 INTENSITY	2082 candela	630 candela	127 candela	20 candela	/	/	/
 IMPACT RESISTANCE				1 meter			
 WATER RESISTANT				IP66			

**Note:** According to the ANSI/NEMA FL1 standard, the above specifications are from the results produced by Fenix through its laboratory testing using the built-in 400mAh battery under the temperature of 213°C and humidity of 50% – 80%. The true performance of this product may vary according to different working environments and the actual

\*The High output is measured in a total runtime, including output at reduced levels due to temperature or protection mechanism in the design.

- In white light mode, single-click the switch to cycle through Eco-Low- Med-High.
- In red light mode, single-click the switch to cycle through Red-Red Flash.
- With the breathing light turned on, single click the switch to cycle through Red-Green-Red&Green in turn.

## INCLUDED

- Fenix EO3R V2,0 flashlight
- USB Type-C charging cable
- Key chain, User manual
- Warranty card

### Intelligent Memory Circuit

The light memorizes the last selected output in white light mode. When turned on again, the previously used output of white light mode will be recalled.

### Lock/Unlock

**Lock:** with the light switched off, press and hold the switch for more than 3 seconds to lock the light, the light will blink twice on Eco to indicate locked status.

**Unlock:** with the light locked, press and hold the switch for 3 seconds, the light will be unlocked and activated on Eco. In locked status, a single clicking will activate battery level indication, and other operations except long pressing will activate two blinks on Eco to indicate locked status.

## WARNING

- Do place this light out of the reach of children!
- Do NOT shine the light directly into the eyes of anyone!
- Do NOT shine flammable objects at close range to avoid burning objects or causing danger due to high temperatures!

- Do NOT use the light in inappropriate ways, such as biting in the mouth, to avoid personal injury or life threats when the light or internal battery fails!
- This light will accumulate a lot of heat while working, resulting in a high temperature of the flashlight shell. Pay attention to safe use to avoid scalding.
- Turn off and lock the light or remove the battery from the light to prevent accidental activation when the light is placed in a closed and flammable environment, such as pockets and backpacks! The LED of this flashlight is not replaceable, so the whole light should be replaced when the LED reaches the end of its life.

## FENIX E03R V2.0 FLASHLIGHT

- 500 lumens maximum cutout and 90 meters maximum beam distance. Two white light LEDs and one red light LED, with a lifespan of 50,000
- Built-in 400mAh battery.
- Switch built-in green/red breathing light.
- White/red light sources.
- USB Type-C charging port.
- Recessed switch and lockout function.
- Battery level indication and low-voltage warning.
- Intelligent overheat protection against high surface temperature.
- All-metal CNC machining light body.
- Premium type HAIII hard-anodized ant-abrasive finish.
- Size: 2.07" x 1.02" x 0.51" / 52.5 x 26 x 13 mm.
- Weight: 1.06 oz / 30 g.


## OPERATING INSTRUCTION

### On/off


Press and hold the switch for 0.5 seconds to turn on/off the light. Press and hold the switch for more than 1.2 seconds; the light will blink once on Eco, and then the red light turns on. With the light switched off and unlocked, double click the site, turn on the breadth and light off, and hold for 5 seconds to turn.n

### Output Selection

- **Green light on:** saturated 100% – 85%
- **Green light flashes:** sufficient 85% – 50%
- **Red light on:** poor 50% – 25%
- **Red light flashes:** critical 25% – 1%

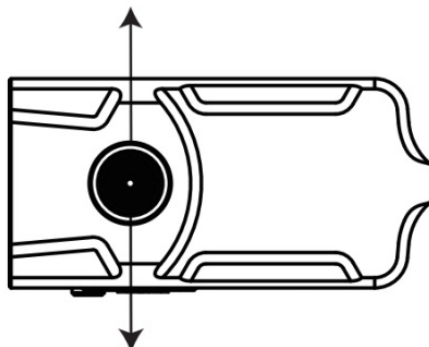


① Switch

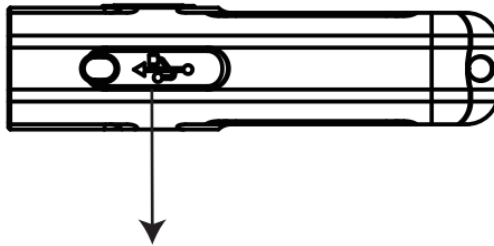

② USB Type-C charging port

- Press and hold the switch for 0.5 seconds to turn on/off the light.
- In white light mode: single click the switch to cycle through Eco→Low-Med- High.
- Press and hold the switch for 1.2 seconds to turn on the red light.
- In red light mode, single-click the switch to cycle through Red-Red Flash.
- With the light switched off and unlocked, double-click the switch to turn on the breathing light.
- With the breathing light turned on, single click the switch to cycle through Red →Green→Red&Green in turn.
- With the light switched off, press and hold the switch for 3 seconds to lock/unlock the light

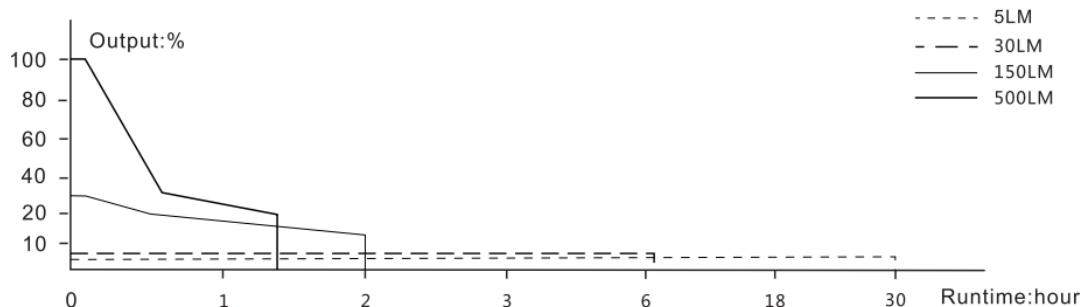

## CHARGING

1. First, switch off the light and plug the USB A socket of the charging cable into an electrical outlet, then connect the USB Type-C socket of the charging cable to the light.
2. The indicator will display red while charging and will turn green when fully charged.
3. Once charging is completed, be sure to close the anti-dust cover for normal use.
4. Eco and Red modes are available while charging.

## BATTERY LEVEL INDICATION

- With the light switched off, single click the switch to check the battery level, and it will last for 3 seconds.
- Green light on: saturated 100% – 85%
- Green light flashes: sufficient 85% – 50%
- Red light on: poor 50% – 25%
- Red light flashes: critical 25% – 1%

## INTELLIGENT OVERHEAT PROTECTION

The light will accumulate a lot of heat when used in High mode for extended periods. When the light reaches a temperature of 60°C or above, the light will automatically step down a few lumens to reduce the temperature. When the temperature drops below 60°C, it will then allow the user the reselection of High mode.


**LOW-VOLTAGE WARNING**

When the voltage level drops below the preset level, the flashlight is programmed to downshift to a lower brightness level until Eco mode is reached. When this happens in Eco mode, the battery level indicator times every 10 minutes to remind you to timely recharge the

**USAGE AND MAINTENANCE**

Fully charge the light in time to ensure normal use next time. Recharge a stored light every four months to maintain the optimum performance of the battery. Once charging is completed, be sure to close the nti-dust cover to maintain the dustproof and waterproof ability.

**Documents / Resources**



[FENIX E03R V2.0 Keychain Flashlight \[pdf\]](#) User Guide  
E03R V2.0 Keychain Flashlight, E03R V2.0, Keychain Flashlight, Flashlight

**References**

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.