



# Finder 80.01 Modular Timer Instruction Manual

[Home](#) » [finder](#) » **Finder 80.01 Modular Timer Instruction Manual** 



80.01




Contents








1 80.01 Modular Timer

2 Documents / Resources

2.1 References

## 80.01 Modular Timer

	80.01.0.240.0000 U <sub>N</sub> (12...240) V AC (50/60 Hz)/DC U <sub>min</sub> 10.8 V AC/DC U <sub>max</sub> 265 V AC/DC P <1.8 VA (50 Hz) / < 1W
	1 CO (SPDT) 16 A 250 V AC  AC1 4000 VA AC15 (230 V AC) 750 VA M (230 V AC) 0.55 kW DC1 (24/110/220) V (16/0.3/0.12) A
	(-20...+60)°C
IP20	


LED	U <sub>N</sub>		
	–	15 – 18	15 – 16
	✓	15 – 18	15 – 16
	✓		15 – 16
	✓	15 – 16	15 – 18



- Open Type Device
- Pollution degree 2 Installation Environment
- Maximum Surrounding Air Temperature 40°C
- Use 60/75°C copper (Cu) conductor only and wire ranges No. 14–18 AWG, stranded or solid
- Terminal tightening torque of 7.1 lb.in. (0.8 Nm)

Utility Model – IB8001001 – 09/24

Finder S.p.A. con unico socio – 10040 ALMESE (TO) – ITALY

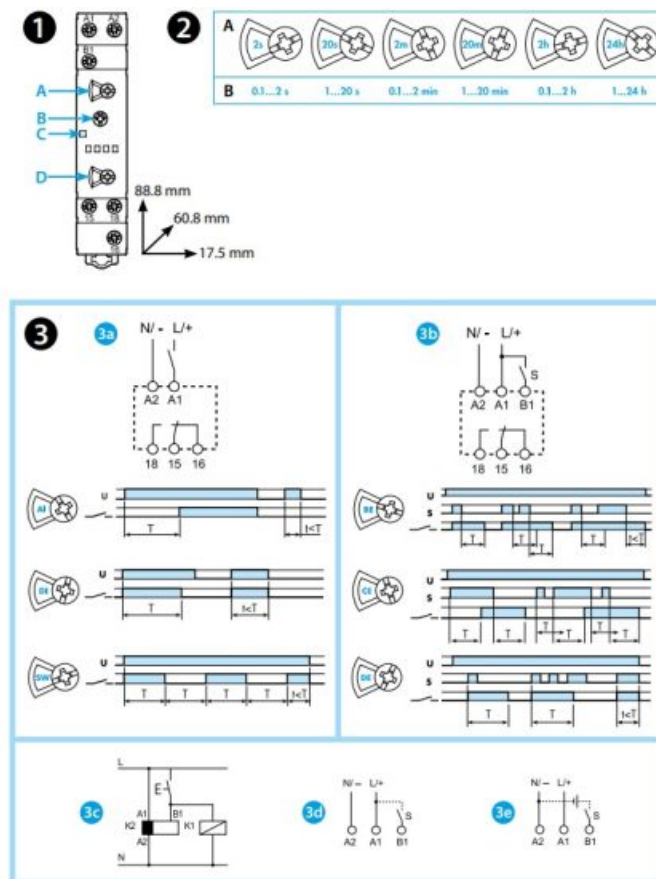

## 80.01 MODULAR TIMER, MULTI-FUNCTION

### 1. FRONT VIEW

- A Time scale rotary selector (Tmax)
- B Time setting (Tmin...Tmax)
- C LED
- D Function rotary selector

### 2. TIME SCALES

(Eg. T=10 min: set A=20 m and B=10)

### 3. WIRING DIAGRAM AND FUNCTIONS

#### NOTE

Time scale and function must be set before energising the timer

3a Without signal START functions:

Start via contact in supply line (A1)

### 4. AI On-delay

DI Interval

SW Symmetrical flasher (starting pulse on)

3b External START functions: Start via contact into control terminal (B1)

BE Off-delay with control signal

CE On- and off-delay with control signal

DE Interval with control signal on

3c Possible to control an external load, such as another relay coil or timer, connected to the signal start terminal

B1

3d With DC supply, positive polarity has to be connected to B1 terminal (according to EN 60204-1)

3e A voltage other than the supply voltage can be applied to the command Start (B1), example:

A1-A2 = 230 V AC

B1-A2 = 12 V DC

#### OTHER DATA

Minimum control impulse: 50 ms

Recovery time: 100 ms


35 mm rail mount (EN 60715)

#### WORKING CONDITIONS

In conformity with the European Directive on EMC 2014/30/EU, the timer relay has a level of immunity, against radiated and conducted disturbances, considerably higher than requirements of EN 61812-1 standard. However, devices like transformers, motors, contactors, switches and power cables may cause disturbances and even damage the timer electronic circuit. For that reason, the wiring cables must be as short as possible, and, when necessary, the timer shall be protected by the relevant RC network, varistor or surge voltage protector.



#### Documents / Resources



[Finder 80.01 Modular Timer](#) [pdf] Instruction Manual  
80.01 Modular Timer, 80.01, Modular Timer, Timer

#### References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.