




## FlashFish A601 Portable Power Station User Guide

[Home](#) » [FlashFish](#) » FlashFish A601 Portable Power Station User Guide 



### A601 Portable Power Station Quick Start Guide

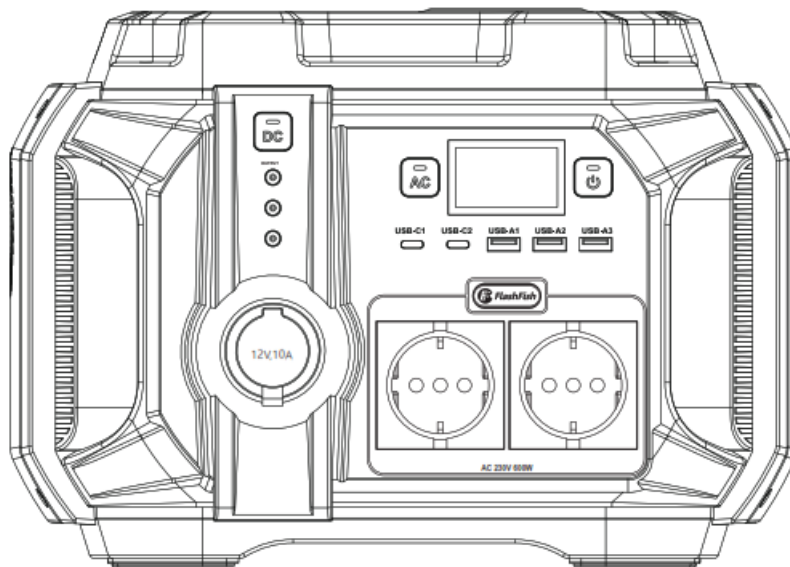

## Contents

- 1 How to Use the Product
- 2 BUTTON DESCRIPTION
- 3 Schematic Diagram
- 4 Technical Parameters
- 5 Troubleshooting
- 6 Charging Method
- 7 Important Information
- 8 Packing list
- 9 Common Problem
- 10 Warranty Card
- 11 Documents / Resources

## How to Use the Product

1. USB-C1 supports input and output, and it's plug and play, it can automatically recognize and charge the corresponding devices without a button to start.
2. As for USB-C2, USB-A1, USB-A2 and USB-A3 output, you need to short press the power on/off button to turn them on. If the A601 is not in use exceeds 300 seconds, the power station will shut off automatically.
3. For DC output, you need to short press DC button, and short press again to turn it off.
4. For AC output, you need to short press AC button, and short press again to turn it off.

This product will automatically shut down if it exceeds the maximum power (230V, rated power 600W, peak 1200W)

### Note:

1. The AC power won't turn off automatically even if it's not in use, please press the AC power button to turn it off to save power.
2. Please check whether outputs are closed or dormant before storing;
3. It should be recharged every 3 months. Or keeping the battery percentage for about 80% which is convenient for the next use. The product should be stored in a cool and dry place.
4. Store the product in a cool and dry place. Exposure to the sun is prohibited.

When the AC port is not in use, it should be turned off manually (long press AC button) to save power and can reduce unpredictable risks.

## BUTTON DESCRIPTION

**Power ON/OFF Button:** 

1. Press the Power Button to start the A601, the LCD screen would display OUTPUT indicator, wireless charger indicator, USB indicator, battery level bar, battery power percentage and real output wattage.
2. If the A601 is not in use exceeds 300 seconds, the power station will shut off automatically to save power. Short press to turn screen on, short press again to turn it off.

### AC ON/OFF Button:

1. Turn on the AG01 by pressing the Power ON/OFF Button, then short press the AC power button to turn AC on.
2. The LCD screen would display OUTPUT indicator, AC Indicator, 60HZ indicator, battery level bar indicator, battery power percentage, real AC output voltage indicator and total output wattage indicator.
3. Short press again to turn the AC and screen off.

### DC ON/OFF Button:


1. Turn on the AG01 first by pressing the Power Button, then short press the DC power button to turn DC on,
2. The LCD screen would display OUTPUT indicator, DC Indicator, battery level bar indicator, battery power percentage and real total output wattage indicator
3. Short press again to turn the DC and screen off

### AAC ON/OFF Button:

1. Short press the LED button the 1st time to turn the LED on, the screen would display LED light indicator, battery level bar indicator, battery power percentage and total output wattage.
2. Short press the LED button the 2nd time – LED read light medium mode:
3. Short press the LED button the 3rd time – LED read light high mode
4. Short press the LED button the 4th time – SOS light mode
5. Short press the LED button the 5th time to turn the LED light off

**Note:** No matter the LED light is in any mode, long press the LED button can turn the light off.

### Schematic Diagram

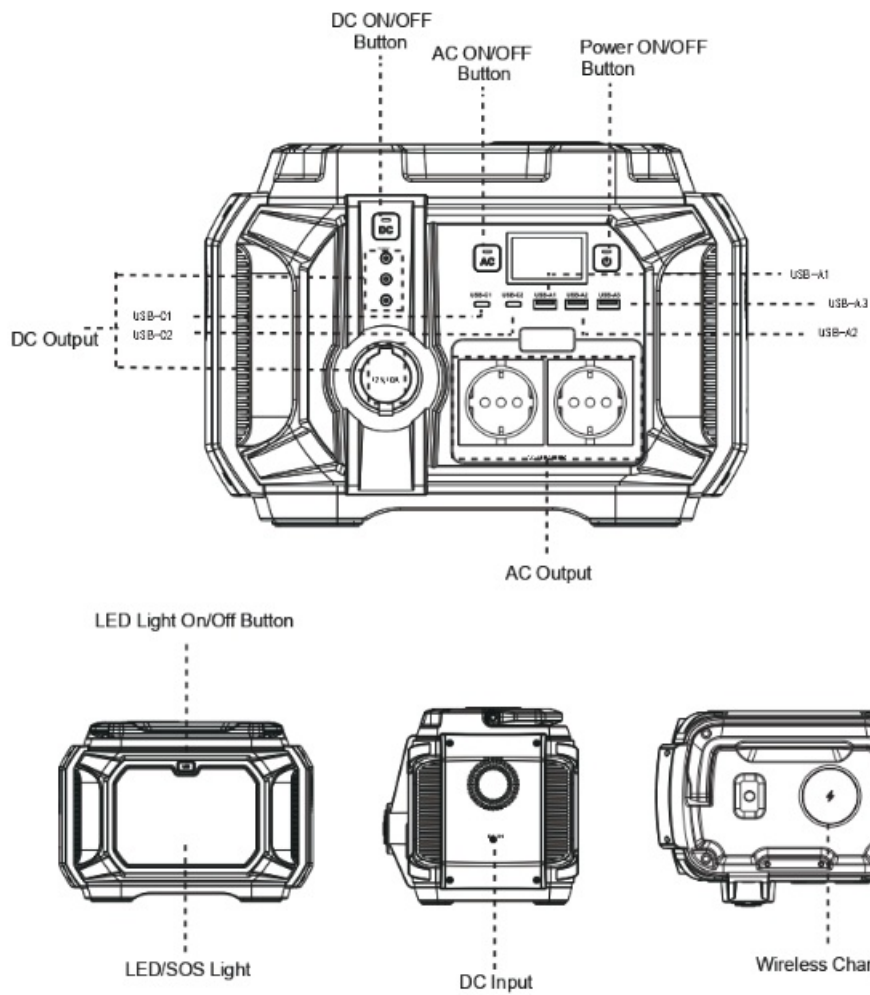

## Technical Parameters

Model	AB01
Capacity	540Wh/150000mAh
AC Output	230V 50Hz Rated 600W, Peak 1200W
DC Output	12VI10A
Car Port Output	12VM0A
USB-C1 Input / Output	5VI2.4A, 9VI3A, 12VI3A, 15VI3A, 20VI5A
USB-C2 Output	SVI2.4A, 9VI3.0A, 12VI2.25A
USB-A1 Output	5VI2.4A, 9VI2.0A, 12V 5A
USB-A2 Output	5VI2.4A
USB-A3 Output	5VI2.4A
Wireless Charger	215w
USB C1 Input DC Input	180W (Max), 3.5 Hours Fully Charge
AC Adapter	20V/4A, 80W
Solar Charging	18V-30V, 200W Recommended
Charging Time	Tours With Original AC Adapter
Cycles	>800 times
Operation Temperature	-20°C~40°C/-4°F~104°F
Weight	6.4kg/14.1lb
Size	1308 9"W217 5"H219mm/L12.16"W8 56"H8 62in
Warranty	12 Months From The Date Of Purchase




## Troubleshooting

If your device is not successfully charged with this product, please follow the steps below:

1. Make sure that the output is turned on, the LED display is on, and the product is in standby state.
2. Check the battery power percentage, if it is 20% or less, please charge the product
3. The power of the device you are using exceeds the maximum power supply for the port of the product.
4. The device cable you are using is not plugged in well or has poor contact.

## Charging Method

Please charge the product fully before the first-time to use and storage. Normally when the battery power is less than 10%, please charge it in time. When the display shows that the current battery level is 100%, it means charging is complete.

		
Support power adapter charging (DC/Type-C)	Support car charging (12-24v)	Support solar charging (Re


## Important Information

### CAUTION

When using this product, you should always follow the basic precautions as follows:

1. The first time to use or before storing, connect the product to the power outlet until it is fully charged. If the screen shows that the power is less than 10%, Please charge it as soon as possible.
2. In order to reduce the risk, if using this product when children are nearby, close supervision is required;
3. Using the accessories recommended or sold by non-professional product manufacturers may cause the risk of electric shock;
4. When the product is not in use, please pull the power plug out of the product socket;
5. Please do not disassemble the product, it may cause fire, electric shock or injury risk and unpredictable risk;
6. Do not use damaged wires or plugs, or damaged output cables to use the product, as there is a risk of electric shock;
7. Please charge the product in a well-ventilated place, do not restrict the ventilation of the product in any way;
8. It's not waterproof. Please place the product in a ventilated and dry place to avoid rain and water, and there is a risk of electric shock when the product enters the water;
9. Do not expose the product to fire or high temperature.
10. The speed of solar charging depends on weather conditions, place your solar panel where it can get as much direct sunlight as possible.


## Packing list



A601 Portable Power Station



Car Charger



AC Adapter



User Manual

## Common Problem

1. How-to judge the storage power of the product?

Please refer to the instructions on the display to check the battery level of the product The battery status is indicated by the percentage of the battery level on the display

The product can be used without being fully charged

2. Can the product be taken on the plane?

According to airline transportation standards, the capacity of lithium battery products carried cannot exceed 100Wh.

And the capacity of this product has reached 540Wh.

3. How to judge whether the product is running?

This product will show output input through the display screen, please refer to the display screen description.

## Warranty Card

Warranty Period	12 months from the date of purchase
Purchase Date	Year /Month /Day
Product Name	AB01
Brand	Flatfish

## Thank you for buying from Flatfish

If you have any questions or need technical support, please contact us directly via the follow contact details When you apply for a return or replacement, please remember to provide s some pictures or a video regarding the exact issue of the product. So that we can handle the after-sales service for you in the first time.

Email: [info@flashfishtech.com](mailto:info@flashfishtech.com)

Website: [www.flashfishtech.com](http://www.flashfishtech.com)



<http://www.flashfishtech.com/>

Flatfish warrants our products to the original purchaser that the power station s free from defects in materials and workmanship. You can choose between a refund or replacement. where goods are faulty or doesn't do what is is supposed to do for 12 months from the date of purchase Damages from normal wear and tear, alteration, misuse, neglect, accident, service by Warranty anyone other that authorized service center are not included



Made In China



## Documents / Resources



## [FlashFish A601 Portable Power Station](#) [pdf] User Guide

A601 Portable Power Station, A601, Portable Power Station, Power Station, Station