



FLEXFIRELEDS LEO-SC-CTRL Leona Smart Home Controller User Manual

[Home](#) » [FLEXFIRELEDS](#) » FLEXFIRELEDS LEO-SC-CTRL Leona Smart Home Controller User Manual 

Contents

- [1 FLEXFIRELEDS LEO-SC-CTRL Leona Smart Home Controller](#)
- [2 Features](#)
- [3 Parameters](#)
- [4 Dimensions](#)
- [5 Wiring Diagram](#)
- [6 Installation Instructions](#)
- [7 Download Phone App](#)
- [8 Connect to the App](#)
- [9 Warranty Information](#)
- [10 Consumer's Acknowledgment](#)
- [11 Documents / Resources](#)
- [12 Related Posts](#)



FLEXFIRELEDS LEO-SC-CTRL Leona Smart Home Controller




Features

- For use with WiFi connection via the Smart Life phone app
- 5-100% Stepless Dimming
- Timer Functionality
- Allows Multiple Users Simultaneously
- Scene Creation
- Compatible with Google Home and Amazon Alexa smart home systems


Parameters

SKU				
LEO-SC-CTRL	W	12-24V DC	120W max. (12V) 240W max. (24V)	5A x 1 CH 10A max.
LEO-DYN-CTRL	DYN	12-24V DC	120W max. (12V) 240W max. (24V)	5A x 2 CH 10A max.
LEO-RGB-CTRL	RGB	12-24V DC	120W max. (12V) 240W max. (24V)	5A x 3 CH 10A max.
LEO-RGBW-CTRL	RGBW	12-24V DC	120W max. (12V) 240W max. (24V)	5A x 4 CH 10A max.
LEO-RGBDYN-CTRL	RGBWW	12-24V DC	120W max. (12V) 240W max. (24V)	5A x 5 CH 10A max.

Dimensions

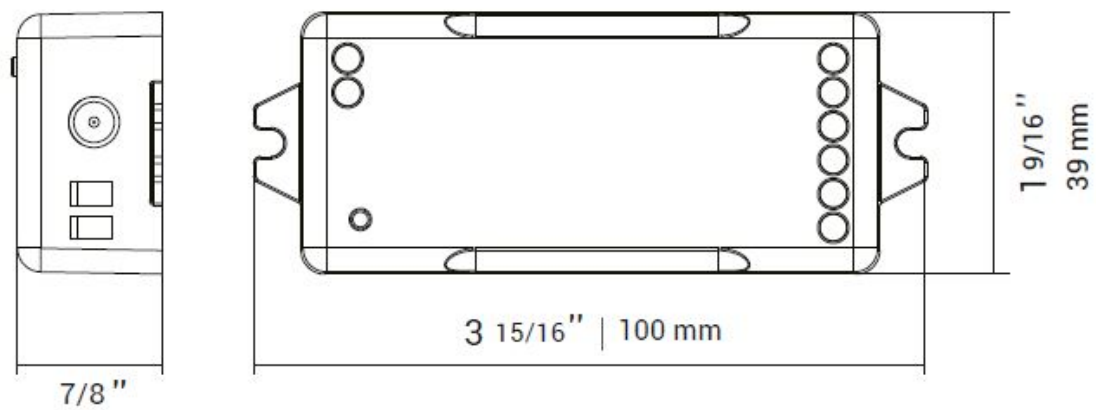

Wiring Diagram

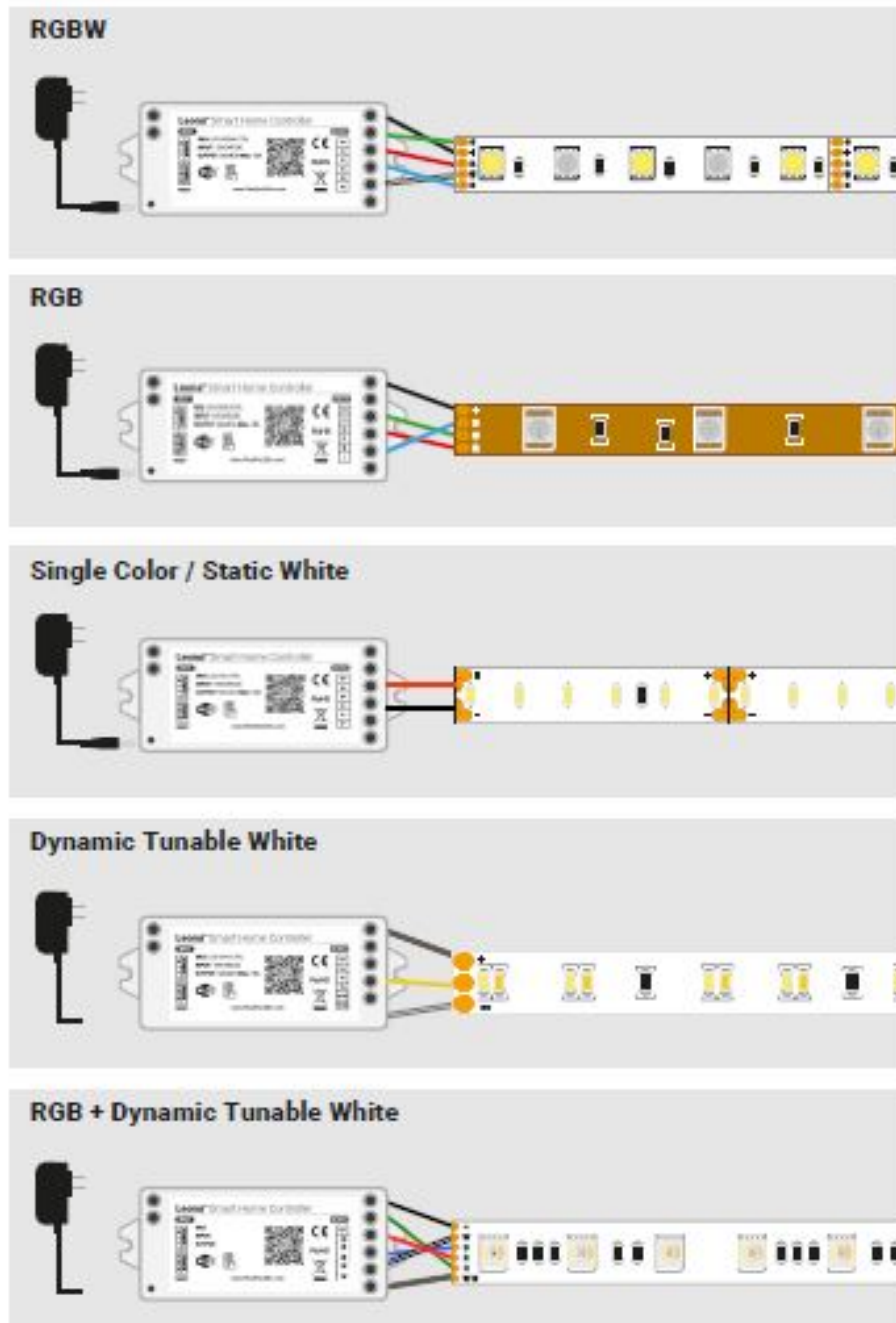

1. DC Port Input, DC 12V-24V
2. Hardwire Port Input, DC 12V-24V
3. Button Functions:
 - Switch ON/OFF
 - Press down for 5 seconds to reset the unit or enter pairing mode
4. LED Wire Terminal Ports

Installation Instructions

1. Using a small screwdriver, connect LED strip wires to the wire terminals on the right side of the controller, matching the markings on the strip light to the terminals on the controller.
2. Ensure that the power supply is unplugged from the wall, then connect the power supply's output to the appropriate input port on the left side of the controller.

3. Once all connections are secure, plug in the power supply to turn the light on.
4. After functionality is confirmed the controller can be adhered to a clean surface using the included 3M adhesive pad or mounting screws.

Caution

- Do not place the controller in any kind of metal enclosure.
- Ensure the power supply and LED strip light are using the same operating voltage.
- Do not place anything on or around the controller, power supply or strip light that is not intended to be used with the system.
- Do not place in or around water or in a high humidity environment. Intended for indoor use only.

Download Phone App

1. Search for the “Smart Life” app from the IOS App Store or Google Play Store.
2. Scan the QR code from the product label or user manual below.



Android 4.0




iOS 8.1

*The app is compatible with Android 4.0 and IOS 8.1 and higher


Log In/Register Account

- Open the Smart Life app.
- Sign up for a new account or log in with an existing account.

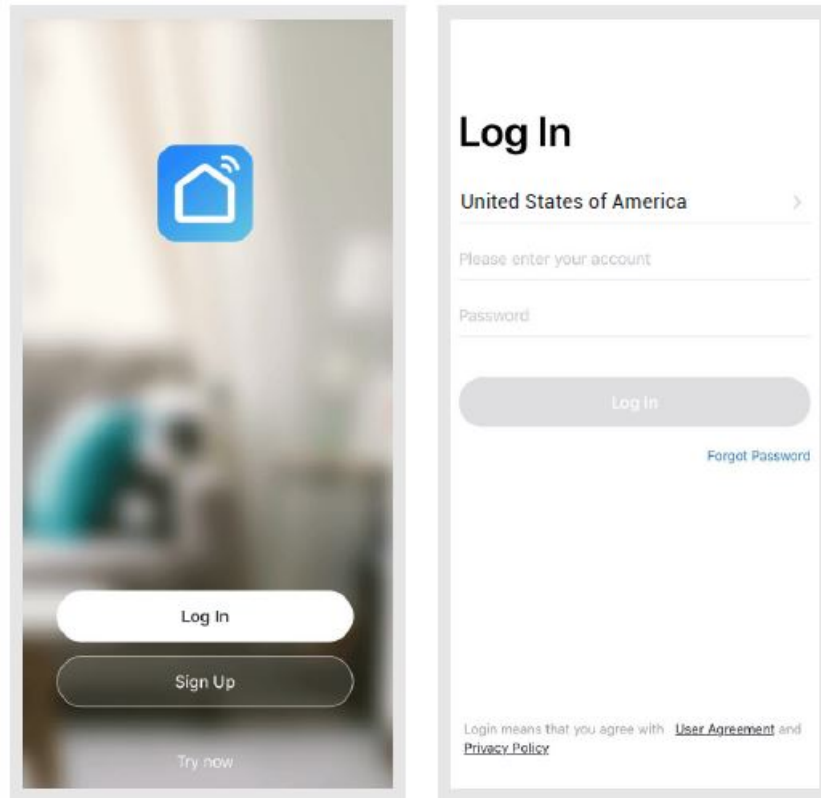

Connect to the App


1. Apply power to your controller and light strip. Once connected to WiFi, ensure that you have a good signal and follow the prompts on the app.
2. The LED strip will flash when power is applied. Follow the prompt to add a new smart device by either manually adding the product or allowing the app to scan for a new device over WiFi.
3. If the LED strip is not flashing when power is applied, press down on the “Reset” button for more than 5 seconds. While the strip flashes, this is the time to add your device to the app.

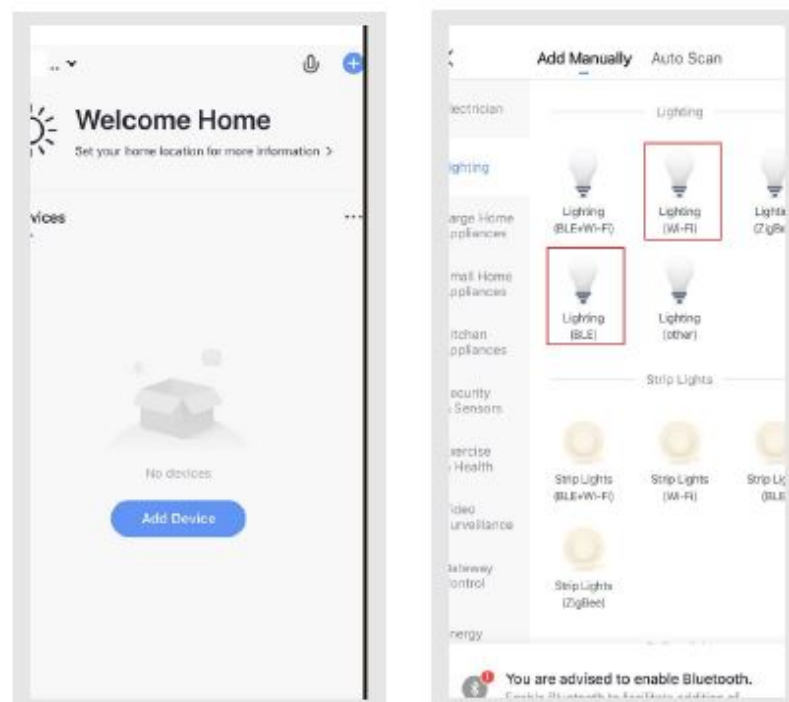

4. Please confirm that the phone and controller are using the same WiFi network and that the WiFi being used is a 2.4G signal. If the WiFi signal is in 5G mode, click “Compatibility Mode” in the upper right hand corner of the

confirm the Light Flashing screen

5. Select the WiFi network connected to the smart device and input the WiFi password. Click "Next" to continue pairing the device.

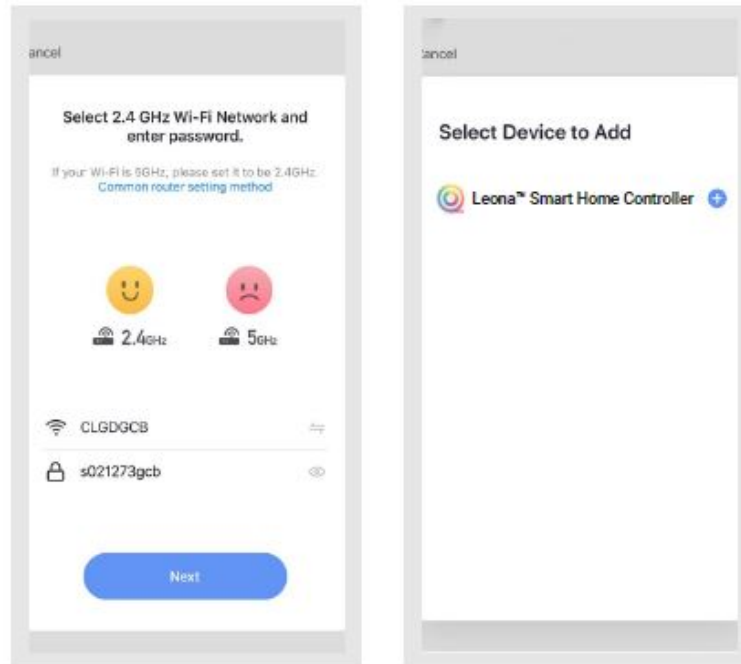

6. Once pairing is complete, you are now able to pair your smart home controller with third-party smart home apps such as Google Home and Amazon Alexa. Within the Smart Life app, however, there are a variety of functions such as dimming, scene control, timers, account sharing and more. Functionality will depend on the model of controller and strip that you have purchased.





Warranty Information

Limited Warranty:

This product has a 2-year limited warranty from the date of shipment. This warranty only include the main product outlined in this specificationn sheet and does not include the additional accessories that are used as a reference. complete warranty details for fixtures and additional accessories are available at

<https://flexfireleds.com/warranties/>

Consumer's Acknowledgment

Flexfire LEDs inc stands behind its products when they are used propely and accordingly to our secifications when you purchase our products yoy are agreeing to the terms and conditions outlined in our warranty section. We try our best to make recommendations, but the burden of proper installation, design, and maintenance relies on the purchaser. This limited warranty does not include product failures that are the result of: Not using a voltage-regulated power supply to connect the LED product or controls; Connecting LED products to the wrong output voltage; Improper connection of power supplies, LED products, or controls; Connecting LED products or controls directly to any AC power source if they are stated for DC only input; Connecting power supplies backwards to an AC power source; Products used in an inappropriate location or in environmental conditions (temperature, humidity, moisture, etc.)

sold as waterproof products; Electrical power surges and spikes; Damage from other natural disasters or "force majeure" incidences; Damage caused by a vehicle or other accident; Damage caused when transporting the item; Damage

as intended or directed, or connected to LED systems or components not mishandling, misapplication or accident. Products used in connection with any components, devices or systems other than those explicitly approved as compatible with Company's products and listed on Company's website. Excessive wear and tear and/or physical or accidental abuse, loss, or theft. Improper repairs or warranty services performed by someone other than

1-844-353-9347

(925) 273-9080

support@FlexfireLEDs.com

Documents / Resources



[FLEXFIRELEDS LEO-SC-CTRL Leona Smart Home Controller](#) [pdf] User Manual
LEO-SC-CTRL, Leona Smart Home Controller