

Midea E60MEW3A17

Midea E60MEW3A17 60 cm Insert Range Hood User Manual

Model: E60MEW3A17

1. INTRODUCTION

Thank you for choosing the Midea E60MEW3A17 60 cm Insert Range Hood. This manual provides essential information for the safe and efficient installation, operation, and maintenance of your new appliance. Please read these instructions carefully before use and retain them for future reference.

The Midea E60MEW3A17 is a 60 cm insert chimney hood featuring a durable stainless steel body, push-button controls for three fan speeds, and two 28W halogen lights. It is designed to effectively remove cooking odors and steam from your kitchen with an airflow capacity of 300 m³/h, utilizing two 5-layer aluminum filters.



Image 1: Front view of the Midea E60MEW3A17 60 cm Insert Range Hood.

2. SAFETY INFORMATION

To reduce the risk of fire, electric shock, or injury, observe the following:

- Read all instructions thoroughly before operating the appliance.
- Ensure the electrical supply matches the voltage specified on the rating plate (220V-240V/50-60Hz).
- Installation must be performed by a qualified technician in accordance with all local codes and standards.
- Always disconnect the appliance from the power supply before cleaning or performing any maintenance.
- Do not flambé under the range hood.
- Regularly clean grease filters to prevent grease accumulation, which can be a fire hazard.
- Ensure adequate ventilation in the room when the range hood is used simultaneously with gas or other fuel-burning appliances.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

3. PRODUCT FEATURES

- **Design:** 60 cm Insert Range Hood, Stainless Steel finish.

- **Controls:** User-friendly push-button interface.
- **Fan Speeds:** 3 adjustable fan speeds for varying cooking needs.
- **Lighting:** 2 x 28W Halogen lights for illuminating the cooking area.
- **Motor Power:** 65W motor for efficient extraction.
- **Airflow Capacity:** 300 m³/h (Cubic Meters Per Hour).
- **Filters:** 2 x 5-layer aluminum mesh filters, washable and reusable.
- **Voltage:** 220V-240V/50-60Hz.

4. SETUP AND INSTALLATION

This product requires professional installation. Installation services are typically available from official brand partners. Please refer to your purchase documentation or contact customer support for details on arranging installation.

4.1 Unpacking

- Carefully remove the range hood from its packaging.
- Inspect the appliance for any signs of damage. Do not install if damaged.
- Ensure all components listed in the packing list are present.

4.2 Mounting and Dimensions

The Midea E60MEW3A17 is designed for insert mounting. Ensure the cabinet opening and surrounding structure can support the weight of the unit and accommodate the required ducting.

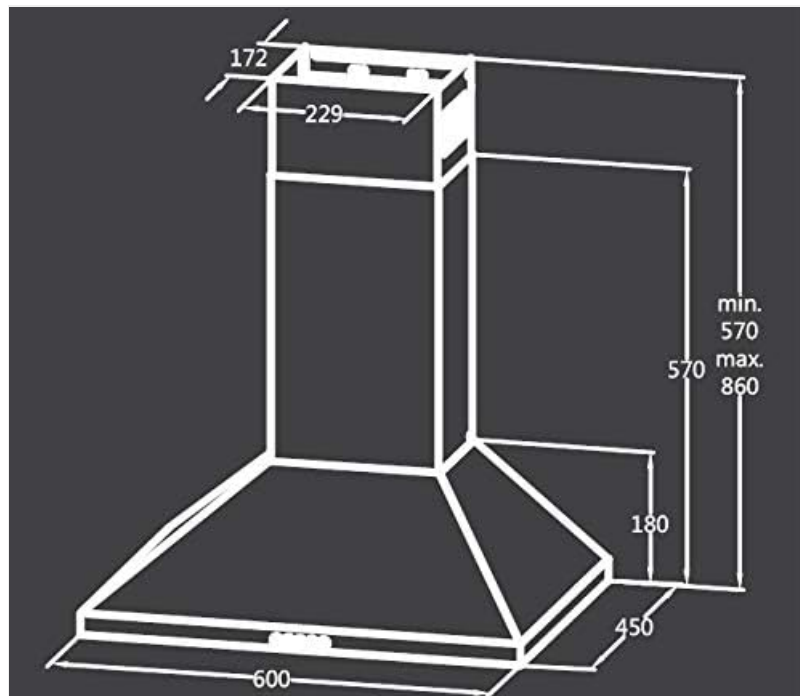


Image 2: Technical diagram showing the dimensions of the Midea E60MEW3A17 range hood, including width (600mm), depth (450mm), and height adjustments (min. 570mm, max. 860mm).

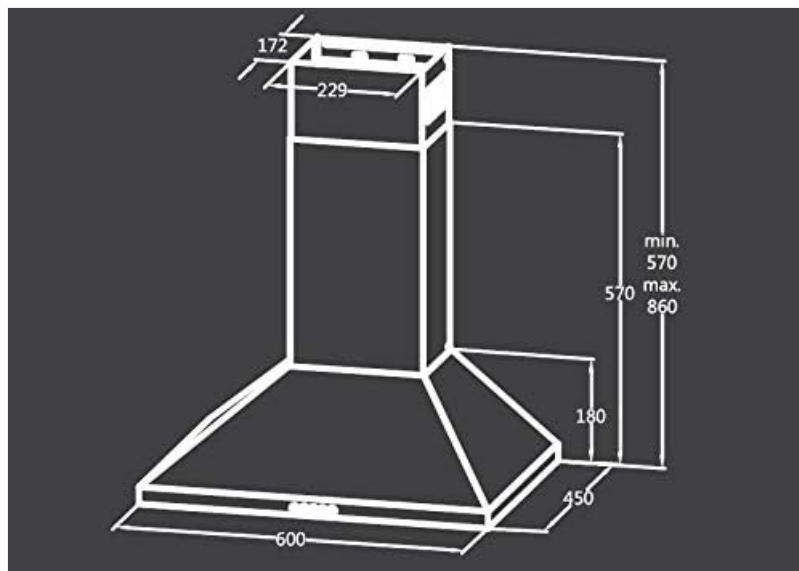


Image 3: Another technical diagram illustrating the Midea E60MEW3A17 range hood's dimensions, focusing on the upper ducting and mounting points (e.g., 172mm, 229mm).

4.3 Electrical Connection

Connect the range hood to a grounded electrical outlet according to local electrical codes. Ensure the power supply is disconnected during this process.

4.4 Ducting

Connect the exhaust outlet of the range hood to an appropriate ducting system that vents to the outside. Use rigid metal ducting for optimal performance and safety. Avoid using flexible ducting or reducing the duct size, as this can impair performance and increase noise.

5. OPERATION

The Midea E60MEW3A17 range hood is operated via push-button controls located on the front panel.

5.1 Fan Speed Control

- **Power On/Off:** Press the power button to turn the fan on or off.
- **Speed Selection:** Press the corresponding speed button (1, 2, or 3) to select the desired extraction level. Speed 1 is for light cooking, Speed 2 for moderate, and Speed 3 for heavy cooking or strong odors.

5.2 Lighting Control

- **Light Button:** Press the light button to turn the halogen lights on or off, illuminating your cooking surface.

6. MAINTENANCE

Regular maintenance ensures optimal performance and extends the lifespan of your range hood. Always disconnect power before cleaning or servicing.

6.1 Cleaning Aluminum Filters

The aluminum grease filters should be cleaned regularly (approximately every 2-4 weeks, depending on usage) to prevent grease buildup and maintain airflow efficiency.

1. Release the filter latches and carefully remove the filters.
2. Wash the filters in hot soapy water or in a dishwasher. Avoid using abrasive cleaners.
3. Rinse thoroughly and allow them to dry completely before re-installing.

6.2 Cleaning the Exterior

Clean the stainless steel exterior with a soft cloth and a non-abrasive stainless steel cleaner. Do not use corrosive or abrasive products, or scourers.

6.3 Replacing Halogen Lights

Ensure the appliance is disconnected from power and the lights have cooled down before attempting replacement.

1. Carefully remove the old halogen bulb.
2. Replace with a new 28W halogen bulb of the same type.
3. Restore power and test the lights.

7. TROUBLESHOOTING

Before contacting customer service, please check the following common issues and solutions:

| Problem | Possible Cause | Solution |
|----------------------|--|---|
| Fan does not operate | No power supply; Motor fault; Control panel fault. | Check power connection and circuit breaker; Contact service technician. |
| Lights do not work | Bulb faulty; Wiring issue. | Replace bulb; Contact service technician. |
| Poor suction | Grease filters clogged; Ducting obstructed; Incorrect installation height. | Clean filters; Check ducting for obstructions; Verify installation height. |
| Excessive noise | Loose components; Ducting issues; Motor imbalance. | Check for loose parts; Inspect ducting for proper installation; Contact service technician. |

8. SPECIFICATIONS

| Feature | Specification |
|----------|-------------------|
| Model | E60MEW3A17 |
| Brand | Midea |
| Type | Insert Range Hood |
| Material | Stainless Steel |
| Color | Silver |

| Feature | Specification |
|--------------------|---|
| Dimensions (W x D) | 60 cm x 45 cm (approximate, refer to diagrams for full details) |
| Number of Speeds | 3 |
| Control Method | Push Button |
| Light Source Type | Halogen |
| Light Wattage | 2 x 28W |
| Motor Power | 65W |
| Air Flow Capacity | 300 m³/h |
| Filter Type | 5-layer Aluminum Mesh |
| Noise Level | 65 Decibels |
| Voltage | 220V-240V/50-60Hz |
| Item Weight | 6.7 Kilograms |

9. WARRANTY AND SUPPORT

This Midea E60MEW3A17 Insert Range Hood comes with a**1-Year Warranty** from the date of purchase. Please retain your proof of purchase for warranty claims.

For technical assistance, service requests, or to inquire about installation services, please contact Midea customer support or your authorized Midea service center. Contact details can typically be found on the Midea official website or your product documentation.

You can also visit the[Midea Store on Amazon](#) for more product information and support resources.