

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Intex](#) /

› [Intex 26339EH Ultra XTR 24ft x 52in Above Ground Swimming Pool Set Instruction Manual](#)

Intex 26339EH

Intex 26339EH Ultra XTR 24ft x 52in Above Ground Swimming Pool Set Instruction Manual

This manual provides detailed instructions for the setup, operation, and maintenance of your Intex 26339EH Ultra XTR 24ft x 52in Above Ground Swimming Pool Set, including the sand filter pump, inflatable lounge pool recliners, and inflatable beverage cooler.

1. IMPORTANT SAFETY INFORMATION

Read and follow all safety instructions carefully. Failure to do so can result in serious injury or death.

- Continuous and competent adult supervision of children and the disabled is required at all times.
- Ensure the pool is installed on a level, stable surface.
- Keep children away from the pool area when not under supervision.
- Do not dive or jump into the pool.
- Keep electrical cords away from water.
- Always use the ladder for entry and exit.

2. PACKAGE CONTENTS

Verify that all components listed below are present in your package before beginning assembly.

INCLUDED ACCESSORIES



**Krystal Clear™
Sand Filter Pump
SX2800**



**Removable
Ladder**



Pool Frame



Pool Liner



Pool Cover



Ground Cover



INTEX®

Image: Overview of all included accessories for the Intex Ultra XTR Pool Set.

- Pool Frame (Galvanized steel components)
- Pool Liner (Puncture-resistant 3-Ply PVC material)
- Krystal Clear Sand Filter Pump (Model SX2800)
- Removable Ladder
- Ground Cloth
- Pool Cover
- Two (2) Inflatable Lounge Pool Recliners
- One (1) Inflatable Beverage Cooler
- Repair Patch

3. SETUP INSTRUCTIONS

3.1 Site Preparation

Proper site preparation is crucial for the stability and longevity of your pool. Select a firm, level area free of sharp objects and debris. Ensure the ground is professionally leveled if necessary, as uneven ground can cause structural issues.

3.2 Pool Assembly

The Ultra XTR frame components feature an easy lock system that snaps together without the need for additional tools or locking pins. Refer to the detailed diagrams in the separate assembly guide for step-by-step instructions.

1. Lay out the ground cloth in the chosen area.
2. Unfold the pool liner on top of the ground cloth.
3. Assemble the pool frame by connecting the horizontal beams and vertical supports. Ensure all T-Joints are securely connected.
4. Attach the pool liner to the assembled frame according to the instructions.
5. Install the Krystal Clear Sand Filter Pump and connect all hoses.
6. Position the removable ladder securely.

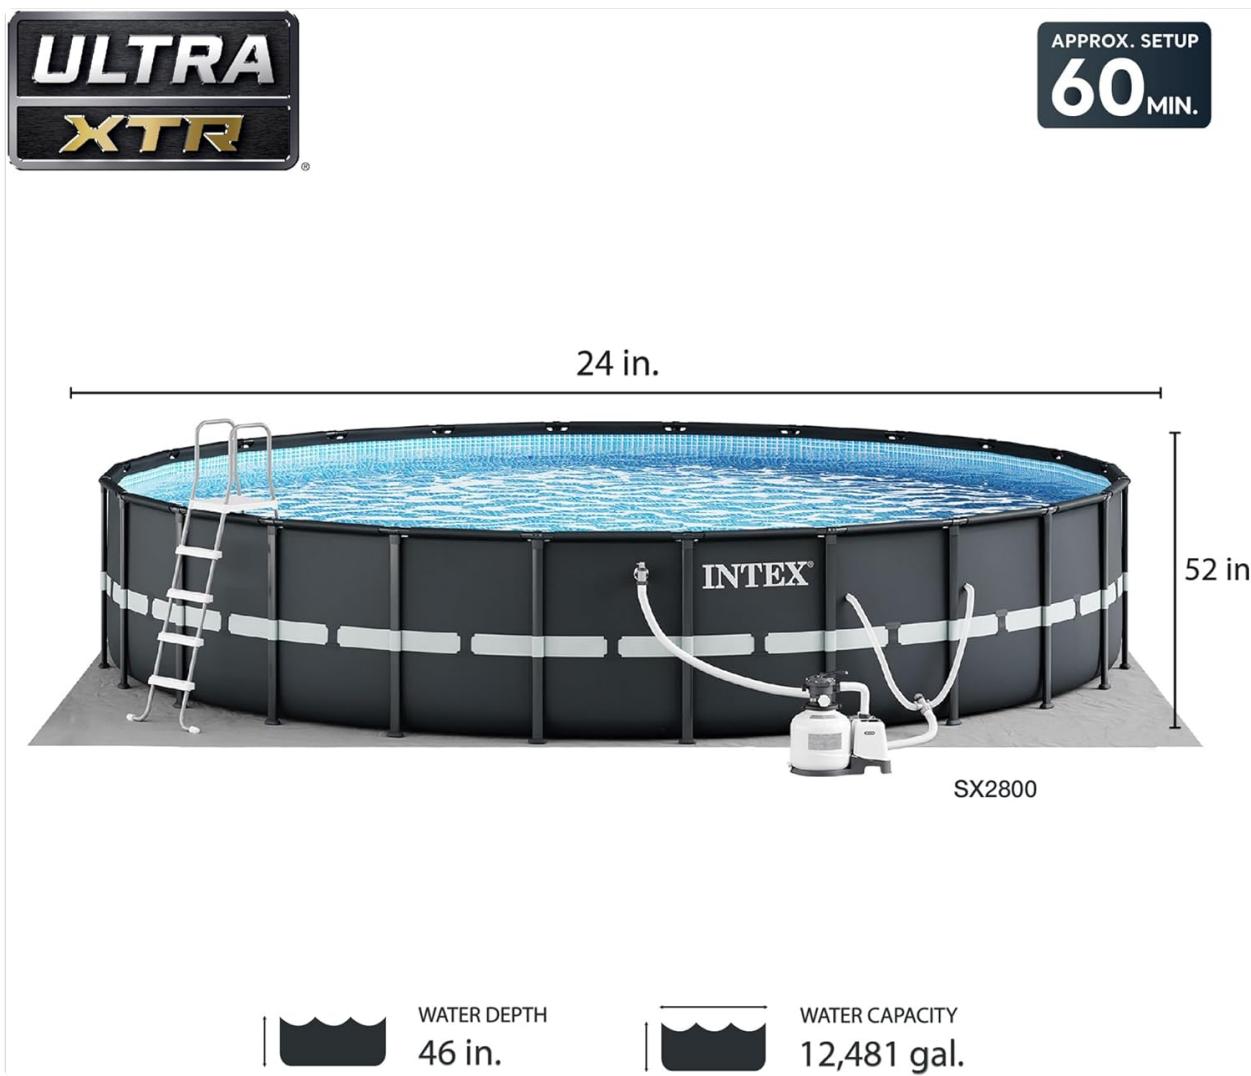


Image: Pool dimensions and capacity for planning installation.

EXCEPTIONAL RUST PROTECTION

- Galvanized steel
- Inside and outside powder coating
- Scientifically tested rust resistance



XTR® FRAME



SEVERE RUSTING
WITHOUT
INTERIOR COATING

REGULAR FRAME

Image: Easy Lock System for frame assembly.

3.3 Inflatable Accessories Setup

- Inflate the lounge recliners and beverage cooler using an appropriate air pump (not included).
- Ensure all valves are securely closed after inflation.

INTEX®

Floating Recliner Lounge Features



Image: Features of the Intex Floating Recliner Lounge.

INTEX®**Mega Chill II****Features**

Image: Features of the Intex Mega Chill II Inflatable Beverage Cooler.

4. OPERATING INSTRUCTIONS

4.1 Krystal Clear Sand Filter Pump SX2800

The sand filter pump is essential for maintaining water clarity and hygiene. It features 6 functions: Filtration, Backwash, Rinse, Recirculate, Drain, and Close System.

INTEX®

KRYSTAL CLEAR™ SAND FILTER PUMP SX2800

- 6 Functions — Filtration, Backwash, Rinse, Recirculate, Drain, and Close System
- Sand lasts up to 5 years with regular backwashing
- Pump Flow Rate:
2800 GPH



INTEX's patented HydroAeration® Technology is precision engineered to improve filtration, clarity and freshness in above ground pools.

Image: Krystal Clear Sand Filter Pump SX2800 details.

- **Filtration:** This is the standard operating mode for continuous water cleaning.
- **Backwash:** Used to clean the sand filter by reversing water flow. Perform weekly or as needed.
- **Rinse:** Used after backwashing to flush out dirty water before returning to filtration.
- **Recirculate:** Circulates water without filtering, useful for chemical distribution.
- **Drain:** Used to empty the pool.
- **Close System:** Shuts off water flow to the pump.

Refer to the pump's dedicated manual for detailed instructions on each function and initial sand loading.

5. MAINTENANCE

5.1 Water Chemistry

Regularly test and adjust pool water chemistry (pH, chlorine, alkalinity) to ensure a safe and clean swimming environment. Follow guidelines provided by your pool chemical supplier.

5.2 Filter Maintenance

- Perform backwashing of the sand filter weekly or when the pressure gauge indicates high pressure.
- Sand in the filter typically lasts up to 5 years with regular backwashing.

5.3 Pool Cleaning

- Skim debris from the water surface daily.
- Brush the pool bottom and sides regularly to prevent algae growth and aid circulation.
- Vacuum the pool as needed to remove settled debris.

5.4 Winterization

Before freezing temperatures arrive, properly drain, clean, and store your pool and equipment. Consult the full manual for detailed winterization procedures.

6. TROUBLESHOOTING

This section addresses common issues you might encounter. For more complex problems, refer to the comprehensive troubleshooting guide in your full product manual or contact customer support.

Problem	Possible Cause	Solution
Cloudy Water	Improper filtration, chemical imbalance, high debris load.	Check filter pump operation, backwash filter, test and adjust water chemistry, increase filtration time.
Pump Not Operating	Power supply issue, clogged impeller, air in system.	Check power connection, clear debris from impeller, prime the pump.
Water Leakage	Puncture in liner, loose hose connections, faulty valve.	Locate and repair puncture with included patch, tighten all connections, inspect valves.

7. SPECIFICATIONS

Feature	Detail
Brand	Intex
Model	26339EH Ultra XTR
Shape	Round
Product Dimensions (L x W x H)	288" L x 288" W x 52" H (24ft diameter x 52in height)
Water Depth	46 inches (1.17 m)
Water Capacity	12,481 Gallons (47,241 L)
Material	Metal frame, 3-Ply PVC liner
Filter Pump Type	Krystal Clear Sand Filter Pump SX2800
Assembly Required	Yes

8. WARRANTY AND SUPPORT

8.1 Warranty Information

This Intex Ultra XTR pool set includes a **2-year warranty**. Please retain your proof of purchase for warranty claims. The warranty covers manufacturing defects under normal use conditions.

8.2 Customer Support

For technical assistance, missing parts, or warranty claims, please contact Intex customer service. Refer to the contact information provided in your product packaging or visit the official Intex website.