

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [ELEGANT](#) /

› [ELEGANT BFH32 32x72 Inch Bi-Fold Glass Shower Door Instruction Manual](#)

ELEGANT BFH32

ELEGANT BFH32 32x72 Inch Bi-Fold Glass Shower Door Instruction Manual

Model: BFH32

1. INTRODUCTION

This instruction manual provides detailed guidance for the installation, operation, and maintenance of your ELEGANT BFH32 32x72 inch Bi-Fold Glass Shower Door. Please read all instructions carefully before beginning installation or use to ensure proper function and safety. Keep this manual for future reference.



Image: ELEGANT BFH32 32x72 inch Bi-Fold Glass Shower Door in a modern bathroom setting.

2. SAFETY INFORMATION

Always follow basic safety precautions to reduce the risk of injury during installation and use. Professional installation is recommended.

- Wear appropriate personal protective equipment, including safety glasses and gloves.
- Handle glass panels with extreme care. Tempered glass, while strong, can shatter if struck at the edges.
- Ensure the installation surface (wall, floor) is structurally sound and level.
- Use appropriate tools and fasteners for your wall type.
- Do not overtighten screws, as this can damage components or glass.
- Allow silicone sealant to cure completely (typically 24 hours) before using the shower.
- Keep children and pets away from the installation area.

3. PACKAGE CONTENTS

Verify that all parts are included and undamaged before beginning assembly. Refer to the diagram below for component identification.

Video: Unboxing and overview of the ELEGANT Bi-Fold Corner Shower Door components.

The video above provides a visual guide to the package contents and initial setup steps.

Included Parts List

Part	Description	Quantity
Glass Panels	1/4 inch clear tempered glass	2
Wall Profiles	Aluminum frame for wall mounting	2
Hinges	Stainless steel bi-fold hinges	2 sets
Handles	Stainless steel door handles	1 set
Magnetic Strips	For door closure and sealing	2
Water Retaining Strips	Vinyl seals for water retention	Various
Fasteners & Covers	Screws, wall plugs, washers, screw covers	Various
Bottom Water Retaining Bar	Aluminum bar for bottom seal	1

4. TOOLS REQUIRED (NOT INCLUDED)

- Drill with appropriate drill bits (e.g., 6mm for wall plugs)
- Measuring Tape
- Pencil
- Level
- Rubber Mallet
- Screwdriver (Phillips head)
- Caulking Gun
- Silicone Sealant (waterproof, mold-resistant)
- Utility Knife

5. INSTALLATION GUIDE

Follow these steps carefully for a successful installation. It is recommended to have two people for certain steps involving heavy glass panels.

5.1. Prepare the Installation Area

1. Ensure the shower tray or floor is level using a spirit level.
2. Clean the wall surfaces where the shower door will be installed.

5.2. Install Wall Profiles

3. Position a wall profile (S01) on the wall, ensuring it is plumb (vertical) with a level. Mark the drill holes with a pencil.
4. Drill holes at the marked positions using a 6mm drill bit.
5. Insert wall plugs (S02) into the drilled holes using a rubber mallet.
6. Attach the wall profile to the wall using screws (S03).
7. Repeat steps 3-6 for the second wall profile on the opposite side.

WIDTH ADJUSTMENT

Adjustable to **0.75"** on each side to fit different bathroom style



Image: The wall profiles allow for up to 0.75 inches (20mm) of width adjustment on each side to accommodate varying shower opening sizes.

5.3. Assemble Glass Panels and Hinges

8. Lay the glass panels on a soft, flat surface.

9. Install the water retaining strips (S06, S08, S09) along the bottom edge of each glass panel.
10. Attach the bi-fold hinges (S07) to connect the two glass panels. Ensure the hinges are correctly oriented for the desired folding direction (inward or outward).

GROUND ADJUSTMENT

Provides up and down for uneven ground



Image: The flexible hinges allow for 180-degree rotation, providing versatile folding options.

5.4. Mount the Shower Door

11. Carefully lift the assembled glass panels and insert them into the installed wall profiles.
12. Secure the panels to the wall profiles with screws (S04, S05).
13. Cover the screw heads with the decorative screw covers.

5.5. Install Seals and Handles

14. Insert the magnetic profile (S15) into the wall profile on the closing side to ensure a secure seal.
15. Install the bottom water retaining bar (S17, S18) along the bottom edge of the shower door opening.
16. Install the magnetic retaining strips (S10) along the vertical edges of the glass panels where they meet when closed.
17. Attach the stainless steel handles (S20) to the designated holes on the glass panels.

STAINLESS STEEL HANDLE

Not easily corroded and rusted, long-lasting



Image: Magnetic strips provide a secure closure and prevent water leakage.



Image: Durable stainless steel handle for easy opening and closing.

5.6. Sealing and Final Adjustments

18. Apply a continuous bead of silicone sealant along the outside edges of the wall profiles where they meet the wall and along the bottom edge of the shower door where it meets the shower tray/floor.
19. Allow the silicone sealant to cure for at least 24 hours before using the shower.
20. Check for smooth operation of the bi-fold panels. If the door does not close properly or keeps opening, adjust the frame by pushing in or pulling out the wall profile slightly to achieve the correct alignment and tension for the magnetic seal.



Image: Adjusting the frame for optimal door closure and seal.

6. OPERATING INSTRUCTIONS

The ELEGANT BFH32 bi-fold shower door is designed for flexible access and space-saving. To open the door, gently pull the handle to disengage the magnetic seal, then fold the panels inward or outward as desired. The hinges allow for a 180-degree rotation, providing ample entry space, especially beneficial for smaller bathrooms.

FULL FOLDING GLASS DOORS

Free access regardless of space restrictions



Image: Full folding glass doors provide free access regardless of space restrictions.

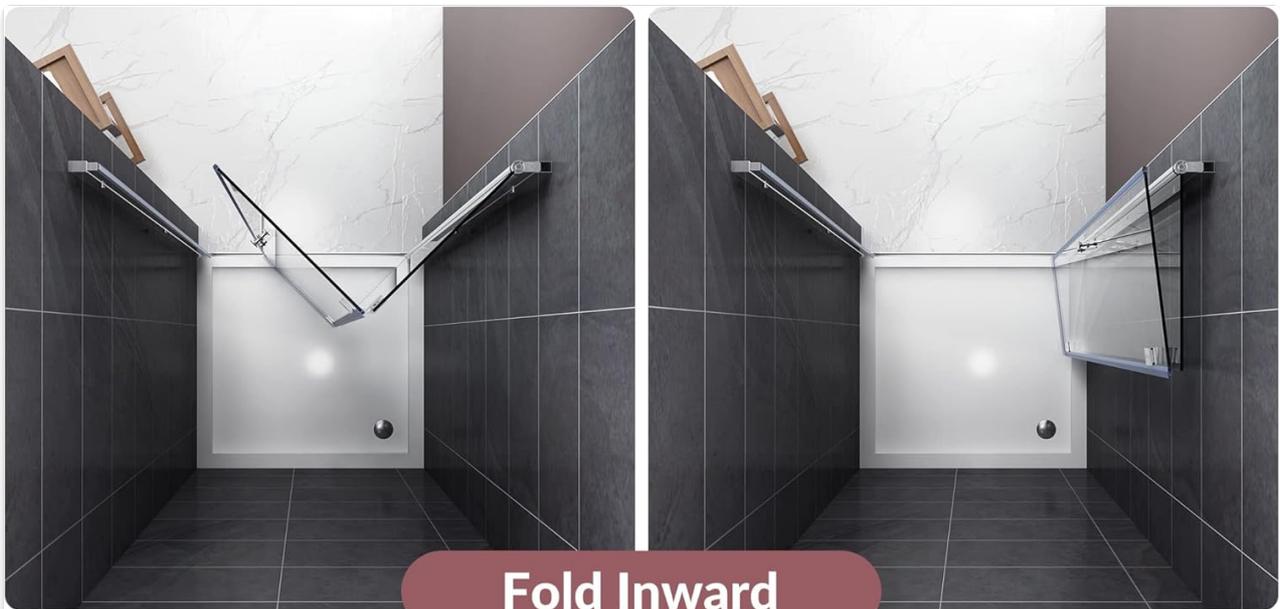


Image: The bi-fold design allows for both inward and outward folding.

7. MAINTENANCE

Regular cleaning and maintenance will prolong the life and appearance of your shower door.

- **Glass Cleaning:** Use a soft cloth or sponge with a non-abrasive glass cleaner. Avoid harsh chemicals or abrasive pads that can scratch the glass or damage protective coatings.
- **Frame and Hardware:** Wipe down chrome and stainless steel components with a soft, damp cloth. Dry thoroughly to prevent water spots and mineral buildup. Avoid abrasive cleaners.
- **Seals:** Regularly inspect and clean the vinyl water retaining strips and magnetic seals. Remove any soap scum or mildew to maintain their effectiveness. Replace worn or damaged seals promptly.
- **Hinges:** Periodically check hinges for tightness. If they become loose, gently tighten the screws. Do not overtighten.

8. TROUBLESHOOTING

Common Issues and Solutions

Problem	Possible Cause	Solution
Water leakage from bottom or sides	Improperly installed seals, insufficient silicone, uneven shower base.	Ensure all vinyl and magnetic seals are correctly seated. Reapply silicone sealant where gaps are present. Check shower base level.
Door does not close securely or keeps opening	Misaligned wall profiles, weak magnetic seal.	Adjust the wall profiles by pushing in or pulling out to ensure the magnetic strips align and engage properly. Check for obstructions.
Door feels stiff or difficult to fold	Hinges need lubrication or adjustment.	Apply a small amount of silicone-based lubricant to the hinge pivots. Check for any debris obstructing movement.
Scratches on glass	Abrasive cleaning materials used.	Avoid abrasive cleaners and pads. For minor scratches, consult a glass repair specialist.

9. SPECIFICATIONS

Product Specifications

Feature	Detail
Model Number	BFH32
Dimensions	32" W x 72" H (0.25 x 32 x 72 inches)
Glass Thickness	1/4 inch (6mm) clear tempered glass
Material	Aluminum frame, Stainless Steel hinges and handles
Finish	Chrome
Walk-in Opening	26 inches
Width Adjustment	Adjustable 19mm (0.75 inches) on each side
Door Type	Bi-Fold Pivot Swing, Semi-Frameless
Item Weight	55 Pounds
Assembly Required	Yes

10. WARRANTY AND SUPPORT

ELEGANT products are designed for quality and durability. For any questions, concerns, or warranty claims, please contact Elegant Home Supply Inc. customer service.

- **Return Policy:** 30-day easy returns (refund/replacement).
- **Customer Service:** For online orders, please tap "Your Account" - "Order Detail" - "Message Center" on the platform where you purchased the product.
- **Manufacturer:** Elegant Home Supply Inc.

ELEGANT is committed to providing products with enhanced experience and comfort for your personal space. We have over 20 years of brand history and numerous patents, with each product undergoing thousands of tests to ensure high quality and durability.