



GREEN CREATIVE PLS-BYP-HYB LED PLS Bypass Lamp Installation Guide

[Home](#) » [GREEN CREATIVE](#) » GREEN CREATIVE PLS-BYP-HYB LED PLS Bypass Lamp Installation Guide 

Contents

- [1 GREEN CREATIVE PLS-BYP-HYB LED PLS Bypass Lamp](#)
- [2 LED PLS BYPASS LAMP INSTALLATION GUIDE](#)
- [3 INSTALLATION INSTRUCTIONS](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)
- [5 Related Posts](#)



GREENCREATIVE

GREEN CREATIVE PLS-BYP-HYB LED PLS Bypass Lamp



LED PLS BYPASS LAMP INSTALLATION GUIDE

NOTE : This retrofit kit is for a 2 PIN Horizontal and Vertical mounts and can replace 13W and 18W CFL lamps with GX23 bases.

CAUTION – IF THE LAMP OR LUMINAIRE EXHIBITS UNDESIRABLE OPERATION (BUZZING, FLICKERING, ETC.), IMMEDIATELY TURN OFF POWER, REMOVE LAMP FROM LUMINAIRE AND CONTACT THE MANUFACTURER.

WARNING – Risk of fire or electric shock. LED Retrofit Kit installation requires knowledge of luminaire electrical systems. If not qualified electrician. Installation should be performed only by a qualified electrician in qualified, do not attempt installation. Contact a accordance with the National Electrical Code and relevant local code.

WARNING – Risk of fire or electric shock. Install this kit only in the luminaires that have the construction features and where the input rating of the retrofit kit does not exceed the input dimensions shown in the photographs and/or drawings and rating of the luminaire.

WARNING – To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation. Installers should not disconnect existing wires from lamp holder terminals to make new connections at lamp holder terminals. Instead installers should cut existing lamp holder leads away from the lamp holder and make new electrical connections to lamp holder lead wires by employing applicable connectors.

THE RETROFIT ASSEMBLY IS ACCEPTED AS A COMPONENT OF A LUMINAIRE WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY ULOR AUTHORITIES HAVING JURISDICTION.

- Disconnect power at the source before installation, inspection or removal. Do not simply switch off fixture.
- This item is rated at 120-277V. Installer must determine whether line voltage 120-277V is available at the luminaire before installation.
- Not intended for use with emergency exit fixtures or emergency exit lights.
- Not for use with luminaire ballast.
- Do not use if product is damaged.
- This lamp is non-dimmable. Not for use with dimmers.
- This luminaire has been modified to operate LED lamps” shall be marked on the retrofit luminaire where readily visible by the user during normal maintenance including re-lamping.
- Risk of fire or electric shock. Do not open or modify. No user serviceable parts inside.
- SUITABLE FOR DAMP LOCATIONS. Suitable for use in wet locations when used in an outdoor-rated fixture. Not for use where directly exposed to the weather or water.

- Complies with Part 15 of FCC. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received including interference that may cause undesired operation.
- No external weight or mechanical force should be applied to lamp or components.

NOTE: This retrofit kit is a hybrid product meaning it can work with a magnetic CFL ballast or run off line voltage. For installation with a magnetic CFL ballast, please refer to the LED PLS DIRECT LAMP INSTALLATION GUIDE section. For line voltage installation (ballast bypass), please refer to the LED PLS BYPASS LAMP INSTALLATION GUIDE section.

NOTE: Ce Kit Retrofit est un produit hybride, ceci signifie qu'il peut fonctionner sur ballast magnétique CFL ou directement sur le secteur. Pour l'installation avec une ballast magnétique CFL, veuillez-vous référer au GUIDE D'INSTALLATION DIRECT DES LAMPES LED PLS. Pour une installation sur le secteur (contourner la ballast), veuillez-vous référer au GUIDE D'INSTALLATION BYPASS DES LAMPES LED PLS.

NOTE

- This retrofit kit is for a 2 PIN Horizontal and Vertical mounts and can replace 13W and 18W CFL lamps with GX23 bases.
- This lamp is non-dimmable. Not for use with dimmers.
- Operates on magnetic ballasts only.
- This lamp is not compatible with luminaires that use a remote starter.
- Suitable to replace compact fluorescent lamps as specified on the product label.

CAUTION- IF THE LAMP OR LUMINAIRE EXHIBITS UNDESIRABLE OPERATION (BUZZING, FLICKERING, ETC.), IMMEDIATELY TURN OFF POWER, REMOVE LAMP

CAUTION- RISK OF FIRE. DO NOT INSTALL IN A PRE-HEAT LUMINAIRE. FROM LUMINAIRE AND CONTACT THE MANUFACTURER.

WARNING- RISK OF FIRE. USE ONLY IN PLACE OF COMPACT FLUORESCENT LAMPS SPECIFIED ON LABEL. SEE INSTRUCTIONS. THIS LAMP ONLY OPERATES ON MAGNETIC BALLASTS. IF LAMP DOES NOT LIGHT WHEN THE LUMINAIRE IS ENERGIZED, REMOVE LAMP FROM LUMINAIRE AND CONTACT LAMP MANUFACTURER OR QUALIFIED ELECTRICIAN. THIS PRODUCT MAY CAUSE INTERFERENCE TO RADIO EQUIPMENT AND SHOULD NOT BE INSTALLED NEAR MARITIME SAFETY COMMUNICATIONS EQUIPMENT OR OTHER CRITICAL NAVIGATION OR COMMUNICATION EQUIPMENT OPERATING BETWEEN 0.45 – 30MHZ. THESE DEVICES ARE NOT INTENDED FOR USE WITH EMERGENCY EXIT FIXTURES OR EMERGENCY EXIT LIGHTS. LAMPS MUST BE OPERATED WITHIN AN AMBIENT FIXTURE TEMPERATURE OF -4°F (-20°C) AND 95°F (35°C).

INSTALLATION INSTRUCTIONS


1. Switch-off power to luminaire.
2. Remove the cover lens (if provided).
3. Remove existing CFL lamp(s) from luminaire. Note: Verify that the CFL type is listed on the LED lamp label.
4. Confirm the lampholder has a GX23 socket.
5. Install LED lamp (one for each CFL lamp removed, ensure pins are firmly seated in lampholders).
6. Turn on the luminaire power after replacing the diffuser (if applicable).

LED PLS BYPASS LAMP INSTALLATION GUIDE

1. Read all WARNINGS before continuing this section.


2. Ensure fixture is 120-277V.
3. Make sure POWER IS TURNED OFF AT THE SOURCE.
4. Remove lens if applicable, remove cover and fluorescent lamp.
5. Before rewiring, check the ballast type and refer to the relevant diagram.
6. Before rewiring, please check the number of lamps per fixture and refer to the relevant diagram.
7. If fixture is new without ballast, please refer to Cf. Diagram 1.

Diagram 1 – New fixture without ballast wiring

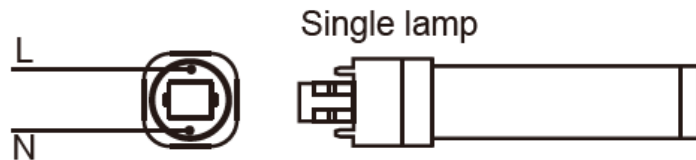

8. If fixture ballast type is magnetic please refer to Cf. Diagram 2.

Diagram 2 – Magnetic ballast fixture wiring modification

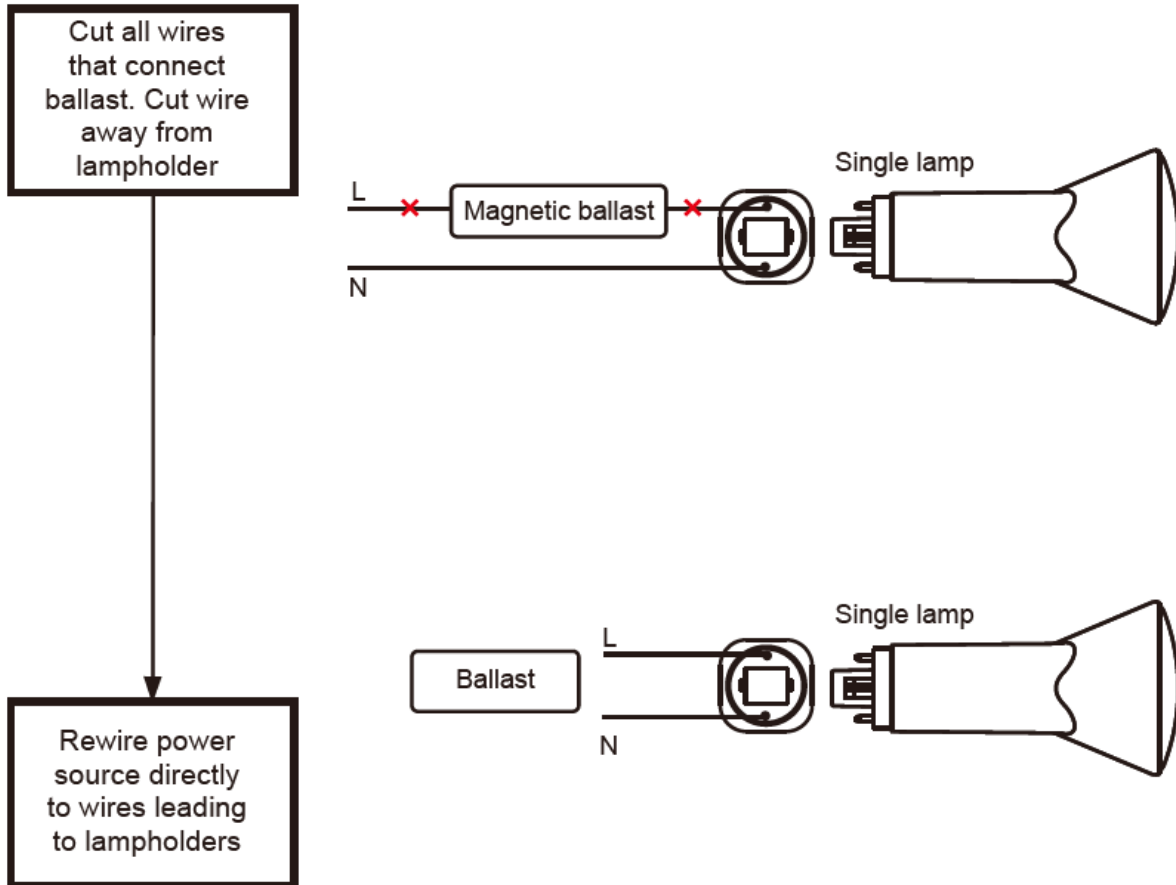

9. This device is powered by two pins; Install lamp into the wired lampholder end.
10. Visibly affix “Modification Sticker” and reinstall housing cover and lens if applicable.
11. Return power back to source and installation is now complete.

www.greencreative.com – info@greencreative.com – Tel / Fax: (866) 774-5433 – / GREENCREATIVELED / GClightingLED / GREEN-CREATIVE An ILLUMUS Brand

Documents / Resources



[GREEN CREATIVE PLS-BYP-HYB LED PLS Bypass Lamp](#) [pdf] Installation Guide
PLS-BYP-HYB, LED PLS Bypass Lamp, Bypass Lamp, LED PLS Lamp, PLS Lamp, Lamp

References

- [GREEN CREATIVE | LED Lighting Manufacture | Lamps & Fixtures](#)