


:hager

**WxSS82xxx-
USBCC Sollysta 2
Gang Switched
Socket USB C
Plus C PD**

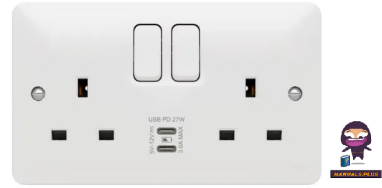

hager WxSS82xxx-USBCC Sollysta 2 Gang Switched Socket USB C Plus C PD Instructions


[Home](#) » [hager](#) » hager WxSS82xxx-USBCC Sollysta 2 Gang Switched Socket USB C Plus C PD Instructions 

Contents

- [1 hager WxSS82xxx-USBCC Sollysta 2 Gang Switched Socket USB C Plus C PD](#)
- [2 Product Usage Instructions](#)
- [3 Frequently Asked Questions](#)
- [4 Safety instructions](#)
- [5 Design and Layout](#)
- [6 Application](#)
- [7 Installation and electrical connection](#)
- [8 Technical data](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)

:hager

hager WxSS82xxx-USBCC Sollysta 2 Gang Switched Socket USB C Plus C PD



Specifications

- **Socket:** WxSS82xxx-USBCC
- **Standard:** BS 1363-2:2023
- **Earth:** Twin Earth
- **Switching:** Double pole
- **Connecting terminals:** 3 x 2.5mm, 3 x 4mm, 2 x 6mm
- **Installation requirements:** Min. box depths -Raised sockets: 25mm, Flat sockets with spacer: 25mm, Flat sockets without spacer: 35mm

- **Degree of protection:** IP20
- **Operating temperature:** Normal operation, Storage/transport temperature
- **Input voltage:** 230V AC
- **Input frequency:** 50/60Hz
- **Rated current per socket outlet:** 13A
- **USB connections:** USB socket, type C
- **Output voltage:** 5.0V, 9.0V, 12.0V
- **Max. output current:** 3.0A, 2.25A
- **Max. output power:** 15.0W, 27.0W
- **Average active efficiency:** 84.0%, 87.0%
- **Efficiency at low load (10%):** 73.0%, 76.0%
- **No-load power consumption:** 100mW
- **Number of ports:** 2
- **Input current:** Max. 0.4A
- **Intelligent charging:** Yes
- **Charging protocols:** USB PD 3.0, PPS, QC4, QC4+, AFC, FCP, SCP, BC1.2

Product Usage Instructions

Safety Instructions

Make sure to follow all safety guidelines provided in the manual to prevent any accidents or damage.

Charging Portable Devices

1. Connect a compatible USB type C charging cable to one of the two USB ports.
2. Charging will start automatically.
3. If two devices are connected simultaneously, charging time may increase as the current is split between the ports.
4. Refer to the manufacturer's specifications for the connected device for accurate charging times and battery characteristics.

Installation and Electrical Connection

Danger: To avoid electric shock, isolate all connection cables before working on the device and cover any live parts in the area.

1. Connect the device according to the provided diagram.
2. Place the device on the back box ensuring no wires are trapped and securely install using the provided screws.
3. Prior to insulation resistance testing, disconnect the device.

Frequently Asked Questions

Q: Can I use non-standard charging cables with the USB ports?

A: It is recommended to use only approved charging cables and connectors to avoid any device malfunctions or damage.

Q: What happens if I connect an electric load exceeding 3.0A to the USB ports?

A: The charging current will be interrupted for safety reasons due to electronic overload protection.

Q: How many ports does the device have?

A: The device has two USB ports for charging compatible devices.

WxSS82xxx-USBCC

13A Socket w/ USB C+C Power Delivery

Safety instructions

Electrical devices must only be installed by a competent person (e.g. qualified electrician) in accordance with these instructions and in compliance with the installation standards and directives of the country and the latest edition of the IET regulations (BS 7671). Sockets should be protected by a suitable RCD device. Failure to comply with these installation instructions may result in damage to the device, fire or other hazards.

These instructions are an integral component of the product and must be retained by the end user.

Design and Layout

Design and layout of the device

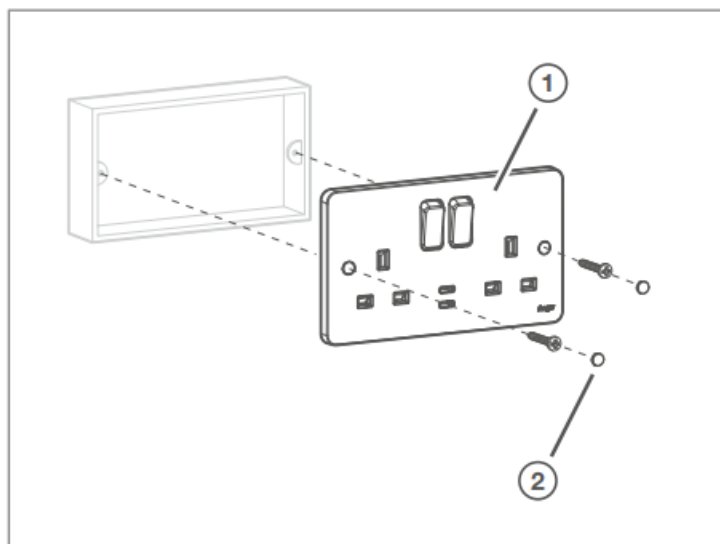


Fig. 1: Design and layout of the device

1. 2 Gang DP 13A Switched Socket with 2 port USB C+C
2. Screw caps (only available with WMSS82-USBCC)

References WF* are supplied with a 10mm spacer (WMUSBS) for use when mounting on a 25mm re-cessed back box.

Correct use

- The USB connections are suitable for charging most portable electronic devices via a USB-C connector.
- The USB ports are used exclusively for power supply. No data is transferred.
- Only suitable for indoor use.

Product characteristics

- USB ports short circuit and overload proof (electronic protection)
- USB ports type C

Application

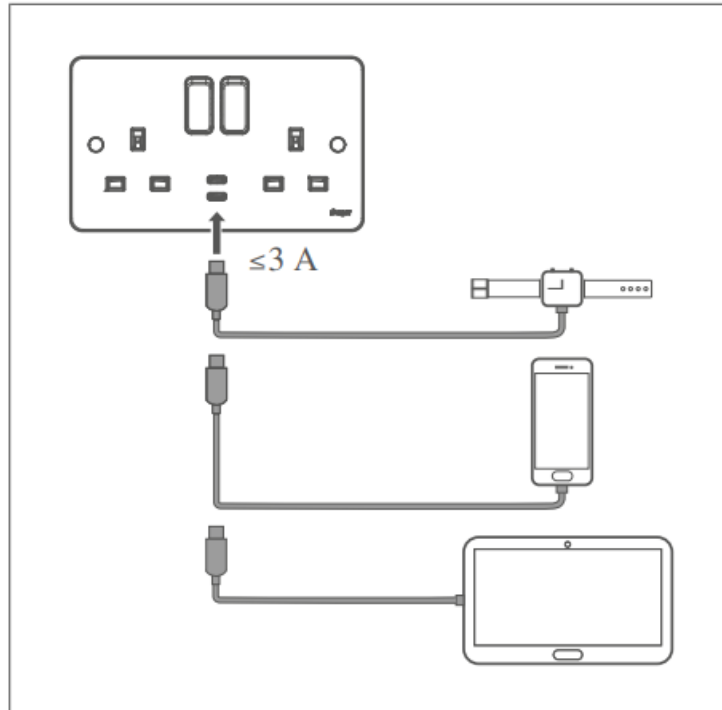


Fig. 2: Connect devices

Caution

The use of non-standardized charging cables and connectors can cause device malfunctions. The devices may be destroyed.

- Use only approved charging cables and connectors.

If devices are connected to the USB charging socket with their original charging cables, the charging socket can recognise the devices and regulate the charging current.

If an 'electric load' of more than 3.0A or two 'electric loads' of more than 3.0A are connected to the USB ports, the charging current is interrupted for safety reasons. The electronic overload protection interrupts the charging operation.

Charging portable devices

- Connect a compatible USB type C charging cable to one of the two USB ports.

Charging will commence automatically.

If two devices are connected, the charging time may be longer as the charging current is divided between the two ports.

Note the manufacturer's specifications for the connected device for the charging time and the charging

characteristics of the batteries.

Installation and electrical connection

Danger

Electric shock when live parts are touched!

An electric shock can lead to death!

- Isolate all connection cables before working on the device and cover any live parts in the area!

Connecting and installing the device

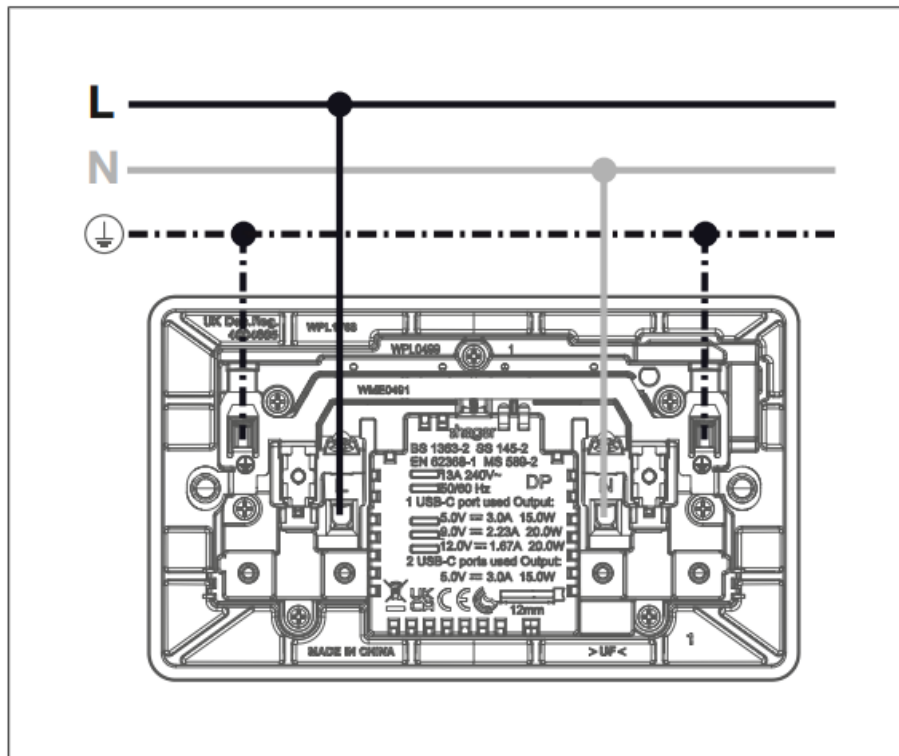


Fig. 3: Electrical connection

- Connect the device (1) according to the diagram (Figure 3).
- Place the device on the back box ensuring no wires are trapped and secure installation using screws provided.

Caution

Possible damage to the device or spurious insulation readings.

The device may be destroyed.

- Disconnect the device before carrying out insulation resistance testing.

Technical data

Socket

Standard	BS 1363-2:2023
Earth	Twin Earth
Switching	Double pole
Connecting terminals	3 x 2.5mm 3 x 4mm 2 x 6mm
Installation requirements, min. box depths:	
Raised sockets (WM*, WR*, WP*)	25mm
Flat sockets (WF*)	
- with spacer	25mm
- without spacer	35mm
Degree of protection	IP20
Operating temperature	-5 ... 35°C
Storage/transport temperature	-25 ... 70°C
Input voltage	230V AC
Input frequency	50/60Hz
Rated current per socket outlet	13A

USB connections

USB socket, type C	Operation with 2 ports	Operation of one port		
Output voltage [V]	5.0	5.0	9.0	12.0
Max. output current [A]	3.0	3.0	3.0	2.25
Max. output- power [W]	15.0	15.0	27.0	27.0
Average active efficiency [%]	84.0	84.0	87.0	87.0
Efficiency at low load (10%) [%]	73.0	73.0	76.0	76.0
No-load power consumption		≤ 100mW		
Number of ports		2		
Input current		max. 0.4A		
Intelligent charging		Yes		
Charging protocols		USB PD 3.0, PPS, QC4, QC4+, AFC, FCP, SCP, BC1.2, Apple 2.4A, Samsung 2A		

Disposal note

Correct Disposal of this product (Waste Electrical & Electronic Equipment).

(Applicable in the European Union and other European countries with separate collection systems).

This marking shown on the product or its documentation indicates that it should not be disposed of with other household waste at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this device from other types of waste. Recycle the device responsibly to promote the sustainable reuse of material resources.

Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this device for environmentally safe disposal.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial waste for disposal.

Sales Service Centre:

01952 675612

Technical Service Centre
01952 675689

FOR CUSTOMER SERVICES

sales@hager.co.uk / technical@hager.co.uk

Hager Ltd.

Hortonwood 50

Telford


Shropshire

TF1 7FT

www.hager.co.uk

T +44 1 952 677 899 F +44 1 952 675 581 info@hager.com hager.com | 2024-01

Documents / Resources

	<p>hager WxSS82xxx-USBCC Sollysta 2 Gang Switched Socket USB C Plus C PD [pdf]</p> <p>Instructions</p> <p>WxSS82xxx-USBCC, WMSS82x-USBCC, WRSS82xxx-USBCC, WFSS82xxx-USBCC, WPSS82-USBCC, WxSS82xxx-USBCC Sollysta 2 Gang Switched Socket USB C Plus C PD, WxSS82xxx-USBCC, Sollysta 2 Gang Switched Socket USB C Plus C PD, Gang Switched Socket USB C Plus C PD, Switched Socket USB C Plus C PD, Socket USB C Plus C PD, USB C Plus C PD, C Plus C PD</p>
---	--

References

- [:h Hager worldwide](#)
- [User Manual](#)

Manuals+. Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.