




HANYOUNG NUX T21 Digital Counter and Timer Instruction Manual

[Home](#) » [HANYOUNG NUX](#) » HANYOUNG NUX T21 Digital Counter and Timer Instruction Manual 

Contents

- [1 HANYOUNG NUX T21 Digital Counter and Timer](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Safety information](#)
- [5 Features](#)
- [6 Specification](#)
- [7 Appearance](#)
- [8 Part name and function](#)
- [9 Connection diagram](#)
- [10 Time Range](#)
- [11 Operation](#)
- [12 CONTACT](#)
- [13 Documents / Resources](#)
 - [13.1 References](#)
- [14 Related Posts](#)

HANYOUNG nux

HANYOUNG NUX T21 Digital Counter and Timer



Thank you for purchasing HANYOUNG product.

Please check whether the product is the exactly same as you ordered. Before using the product, please read this instruction manual carefully. Please keep this manual where you can view at any time.

Product Information

The T21 is an electronic timer manufactured by PT. Hanyoung Electronic Indonesia. It has a voltage input range of 100-230V AC or 24V DC and offers four timing modes: 1, 3, 6, and 3 hours. The timer can be set to intervals ranging from 0.1 seconds to 24 hours and has a maximum time range of 9999 seconds. It also features an ON/OFF delay mode and output power intervals. The T21 has LED indicators for power and pulse width.

Product Usage Instructions

To use the T21 timer, follow these steps:

1. Connect the timer to a power source within the specified voltage range.
2. Set the desired timing mode using the selector switch.
3. Adjust the interval time using the rotary knob. The range for each timing mode is as follows:
 - Mode 1: 0.1 sec – 10 min
 - Mode 3: 0.3 sec – 30 min
 - Mode 6: 0.6 sec – 60 min
 - Mode 3H: 0.3 hrs – 24 hrs
4. Set the ON/OFF delay mode using the selector switch.
5. Set the output power intervals using the selector switch.
6. Connect the load to the timer's output terminals.
7. Activate the timer by turning the rotary knob clockwise until it clicks.

8. The LED indicators will display the current status of the timer.
9. To deactivate the timer, turn the rotary knob counterclockwise until it clicks.

Note: Always refer to the user manual for specific instructions and safety information before operating the T21 timer.

Safety information

Alerts declared in the manual are classified to Danger, Warning and Caution by their criticality.

- **DANGER:** indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury
- **WARNING:** indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury
- **CAUTION:** indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury

Danger

- Do not touch or contact the input/output terminals because they may cause electric shock.

Warning

- If there is a possibility of an accident caused by errors or malfunctions of this product, install external protection circuit to prevent the accident.
- This product does not contain an electric switch or fuse, so the user needs to install a separate electric switch or fuse externally. (Fuse rating : 250 V 0.5 A)
- To prevent defection or malfunction of this product, supply proper power voltage in accordance with the rating.
- After mounting the product onto a panel, please use a socket dedicated to the product when connecting with other units and do not turn on the power until completing wiring to prevent electric shock.
- Since this is not explosion-proof structure, please use in a place where corrosive gas (such as harmful gas, ammonia, etc.), combustible or explosive gas does not occur.
- Do not decompose, modify, revise or repair this product. This may cause malfunction, electric shock or fire.
- Attach or detach this product while the power is off. Otherwise, it may cause malfunction or electric shock.

Caution

- The contents of this manual may be changed without prior notice.
- Please check whether the product you purchased is the exactly same as you ordered.
- If you use the product with methods other than specified by the manufacturer, there may be bodily injuries or property damages.
- Please check whether the product has no damage or abnormality during delivery.
- Do not use this product at any place with direct vibration or impact.
- Do not use this product at any place with liquid, oil, medical substances, dust, salt or iron contents. (Pollution level 1 or 2)

- Do not polish this product by substances such as alcohol or benzene.
- Do not use this product at any place with excessive induction trouble, static electricity or magnetic noise.
- Do not use this product at any place with possible thermal accumulation due to direct sunlight or heat radiation.
- Install this product at place under 2,000m in altitude.
- When the product gets wet, the inspection is essential because there is danger of an electric leakage or fire.
- If there is an excessive noise from power supply, it is recommended to use insulating transformer and noise filter. The noise filter must be attached to the panel grounded and wiring between the filter output side and power supply terminal should be as short as possible.
- If gauge cables are arranged too closely, the effect on noise may occur.
- Do not connect anything to the unused terminals.
- After checking polarity of terminal, connect wires to the right position.
- Install a switch or circuit breaker that allows the operator to immediately turn OFF the power, and label it to clearly indicate its function.
- For the continuous and safe use of this product, the periodic maintenance is recommended.
- Some parts of this product have limited life span, and others are changed by their usage.
- The warranty period of this product including parts is one year if this product is properly used.
- When power is on, the preparation period of contact output is required. In case of using signals of external interlock circuit, use a delay Relay.

Features

- Timing Relay (4a4b)
- Appearance 21.4 (W) X 28 (H) mm Timing relay
- Plug in type (14 pins)
- Customer sets time range and operation mode.
- Various time range (min / sec : 0.1 sec ~ 60 min, hrs : 0.3 hrs ~ 24 hrs)
- Multi operation mode (Power ON delay, Interval, Flicker OFF start, Flicker ON start)

Suffix code

Model	Code			Description	
T21 –	<input type="checkbox"/> –	<input type="checkbox"/>	<input type="checkbox"/>	Timing Relay	
Time Range	1			1 sec, 10 sec, 1 min, 10 min	Select by DIP switch
	3			3 sec, 30 sec, 3 min, 30 min	
	6			6 sec, 60 sec, 6 min, 60 min	
	3H			3 hrs, 6 hrs, 12 hrs, 24 hrs	
Contact		4		4a4b	
Power supply voltage			A20	200 – 230 V a.c.	
			D24	24 V d.c.	
			A10	100 – 120 V a.c.	

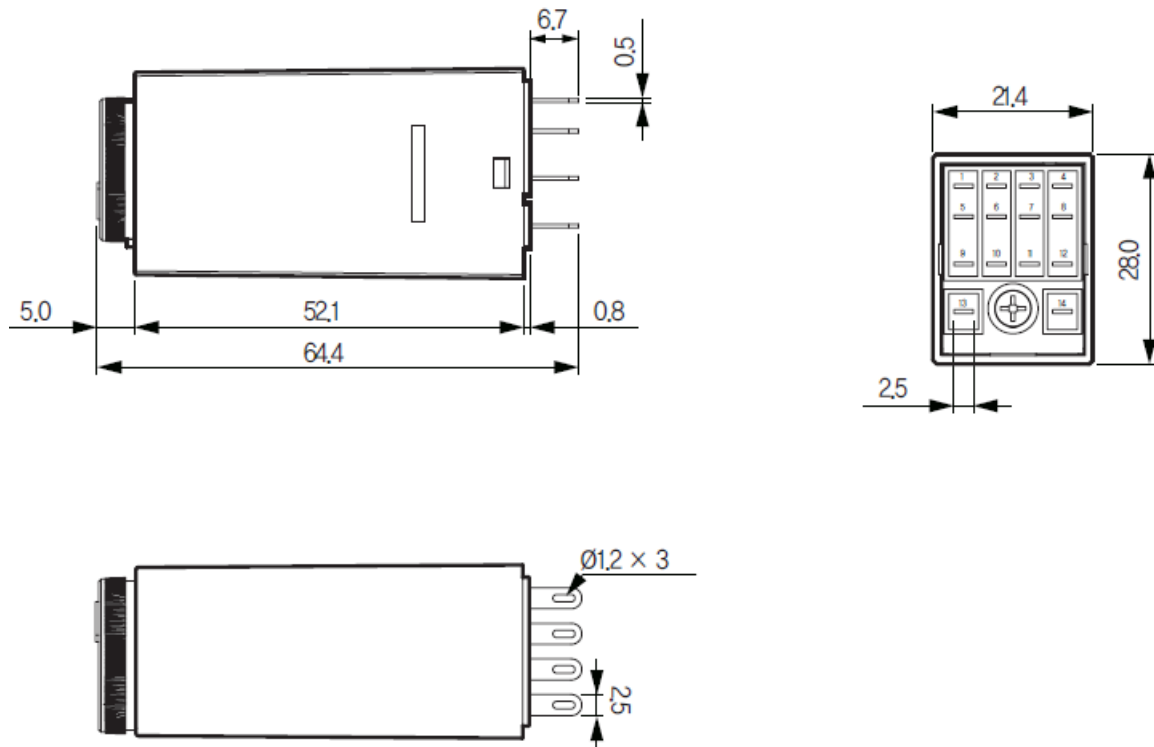
Specification

Model	AC	T21 – 1 / 3 / 6 / 3H – 4A20
	DC	T21 – 1 / 3 / 6 / 3H – 4D24
Power supply voltage	AC	200 – 230 V a.c. 50/60 Hz
	DC	24 V d.c.


Power consumption	AC	3.1 VA max (230 V a.c 60 Hz)
	DC	1.5 W max (24 V d.c)
Reset time		100 ms max
Time Range	1	0.1 sec ~ 10 min
	3	0.3 sec ~ 30 min
	6	0.6 sec ~ 60 min
	3H	0.3 hrs ~ 24 hrs
Time tolerance		repetition tolerance : ± 1 % max. (ratio of maximum scale) setting tolerance : ± 10 % max. (ratio of maximum scale)
Control output	Output mode	Power on delay, Interval, Flicker OFF Start, Flicker ON Start
	Contact construction	4a4b
	Capacity	250 V a.c 3A Resistive load

Life expectancy	Mechanical : 10 million operations min, Electrical : 200,000 operations min
Insulation resistance	100 MΩ min (at 500 V d.c, Between current-carrying terminals and exposed noncurrent-carrying metal parts.)
Dielectric strength	2000 V a.c 50/60 Hz 1 minute (Between current-carrying terminals and exposed noncurrent-carrying metal parts.)
Noise immunity	±2 kV (Between power terminal, pulse width ±1 , square wave noise by noise simulator)
Vibration resistance	10 – 55 Hz (For 1 min), Double amplitude 0.75mm, X,Y,Z each direction for 1 hour
Shock resistance	300 X, Y, Z each direction for 3 times
Ambient temperature	-10 ~ 50 °C (Without condensation)
Storage temperature	-25 ~ 65 °C (Without condensation)
Ambient humidity	35 ~ 85 % RH
Weight	Approx. 42 g

Appearance




Part name and function

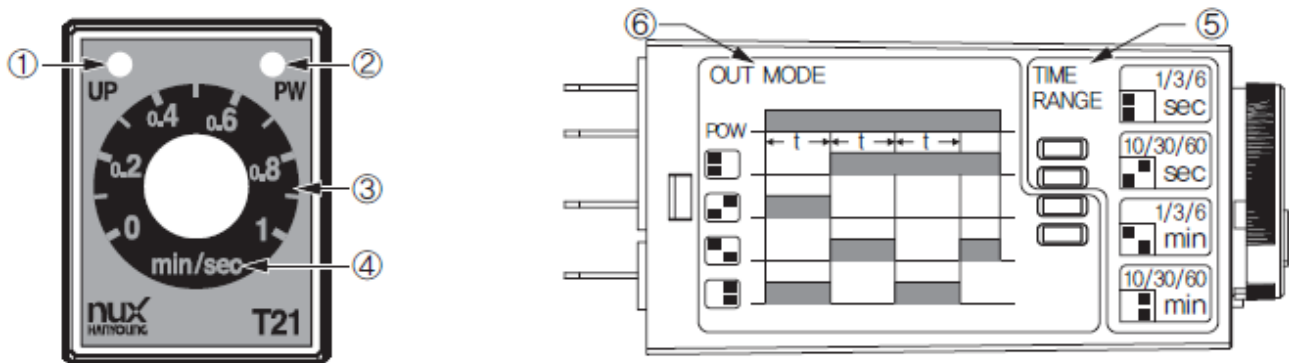


Name		Function
①	Output ON indicator lamp (UP)	After setting time, light ON (Red) at the same time with output operation
②	Power indicator lamp (PW)	Light ON after power ON (Green)
③	Time setting knob	Set timer operation time, Setting time can be changed during operation of timer.
④	Time unit	Time unit of setting time (min/sec, hrs).
⑤	Time range setting (TIME RANGE)	Depend on suffix code, Select time range by DIP switches on the side
⑥	Operating mode setting (OUT MODE)	Select output mode by DIP switches on the side

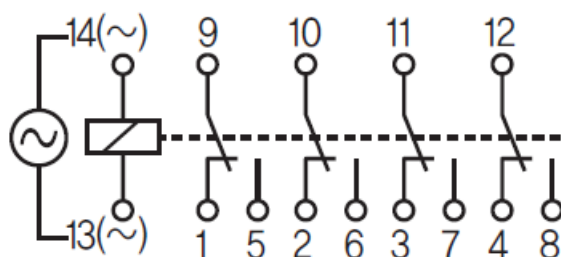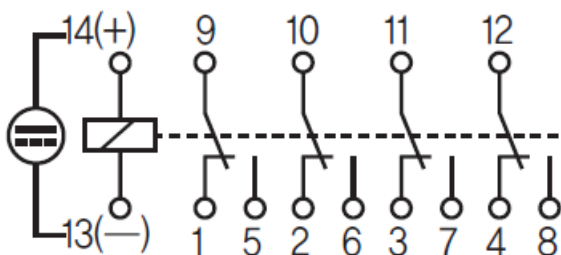Connection diagram

















T21 – 1 / 3 / 6 / 3H – 4A20



T21 – 1/3/6/3H – 4D24







Time Range

Model	Time Range	Time setting Range	Setting
9999 s	1 sec	0,1 ~ 1 sec	 Factory set
	10 sec	1 ~ 10 sec	
	1 min	0,1 ~ 1 min	
	10 min	1 ~ 10 min	
9999 s	3 sec	0,3 ~ 3 sec	 Factory set
	30 sec	3 ~ 30 sec	
	3 min	0,3 ~ 3 min	
	30 min	3 ~ 30 min	
9999 s	6 sec	0,6 ~ 6 sec	 Factory set
	60 sec	6 ~ 60 sec	
	6 min	0,6 ~ 6 min	
	60 min	6 ~ 60 min	
9999 s	3 hrs	0,3 ~ 3 hrs	 Factory set
	6 hrs	0,6 ~ 6 hrs	
	12 hrs	1,2 ~ 12 hrs	
	24 hrs	2,4 ~ 24 hrs	

- Please turn off power to change Time range

Operation

Output Mode	Operation Description	Timing Chart	Setting

<p>ON-Delay</p>  <p>※ t: Set time</p>	<p>When the power i s ON, the output will be ON after se tting time.</p>	<table><tr><td>Power</td><td>⑬-⑭</td><td>Set time</td><td>Reset time</td><td>Set time</td></tr><tr><td>Time-limit NC</td><td>①-⑨, ②-⑩, ③-⑪, ④-⑫</td><td></td><td></td><td></td></tr><tr><td>Time-limit NO</td><td>⑤-⑨, ⑥-⑩, ⑦-⑪, ⑧-⑫</td><td></td><td></td><td></td></tr><tr><td>Output indicator</td><td>UP LED</td><td></td><td></td><td></td></tr><tr><td>Power on indicator</td><td>PW LED</td><td></td><td></td><td></td></tr></table>	Power	⑬-⑭	Set time	Reset time	Set time	Time-limit NC	①-⑨, ②-⑩, ③-⑪, ④-⑫				Time-limit NO	⑤-⑨, ⑥-⑩, ⑦-⑪, ⑧-⑫				Output indicator	UP LED				Power on indicator	PW LED				<div><div><div></div><div></div></div></div> <p>Facto ry set</p>										
Power	⑬-⑭	Set time	Reset time	Set time																																		
Time-limit NC	①-⑨, ②-⑩, ③-⑪, ④-⑫																																					
Time-limit NO	⑤-⑨, ⑥-⑩, ⑦-⑪, ⑧-⑫																																					
Output indicator	UP LED																																					
Power on indicator	PW LED																																					
<p>Interval</p>  <p>※ t: Set time</p>	<p>When the power i s ON, the output i s ON and it will be OFF after setting ti me.</p>	<table><tr><td>Power</td><td>⑬-⑭</td><td>Set time</td><td>Reset time</td><td>Set time</td></tr><tr><td>Time-limit NC</td><td>①-⑨, ②-⑩, ③-⑪, ④-⑫</td><td></td><td></td><td></td></tr><tr><td>Time-limit NO</td><td>⑤-⑨, ⑥-⑩, ⑦-⑪, ⑧-⑫</td><td></td><td></td><td></td></tr><tr><td>Output indicator</td><td>UP LED</td><td></td><td></td><td></td></tr><tr><td>Power on indicator</td><td>PW LED</td><td></td><td></td><td></td></tr></table>	Power	⑬-⑭	Set time	Reset time	Set time	Time-limit NC	①-⑨, ②-⑩, ③-⑪, ④-⑫				Time-limit NO	⑤-⑨, ⑥-⑩, ⑦-⑪, ⑧-⑫				Output indicator	UP LED				Power on indicator	PW LED				<div><div><div></div><div></div></div></div>										
Power	⑬-⑭	Set time	Reset time	Set time																																		
Time-limit NC	①-⑨, ②-⑩, ③-⑪, ④-⑫																																					
Time-limit NO	⑤-⑨, ⑥-⑩, ⑦-⑪, ⑧-⑫																																					
Output indicator	UP LED																																					
Power on indicator	PW LED																																					
<p>Flicker OFF-start</p>  <p>※ t: Set time</p>	<p>When the power i s ON, the output i s OFF and it repeatedly outputs OFF and ON with the setting time interval.</p>	<table><tr><td>Power</td><td>⑬-⑭</td><td>Set time</td><td>Set time</td><td>Set time</td><td>Set time</td><td>Set time</td></tr><tr><td>Time-limit NC</td><td>①-⑨, ②-⑩, ③-⑪, ④-⑫</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Time-limit NO</td><td>⑤-⑨, ⑥-⑩, ⑦-⑪, ⑧-⑫</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Output indicator</td><td>UP LED</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Power on indicator</td><td>PW LED</td><td></td><td></td><td></td><td></td><td></td></tr></table>	Power	⑬-⑭	Set time	Set time	Set time	Set time	Set time	Time-limit NC	①-⑨, ②-⑩, ③-⑪, ④-⑫						Time-limit NO	⑤-⑨, ⑥-⑩, ⑦-⑪, ⑧-⑫						Output indicator	UP LED						Power on indicator	PW LED						<div><div><div></div><div></div></div></div>
Power	⑬-⑭	Set time	Set time	Set time	Set time	Set time																																
Time-limit NC	①-⑨, ②-⑩, ③-⑪, ④-⑫																																					
Time-limit NO	⑤-⑨, ⑥-⑩, ⑦-⑪, ⑧-⑫																																					
Output indicator	UP LED																																					
Power on indicator	PW LED																																					
<p>Flicker ON-start</p>  <p>※ t: Set time</p>	<p>When the power i s ON, the output i s ON and it repeat edly outputs ON a nd OFF with the s etting time interval .</p>	<table><tr><td>Power</td><td>⑬-⑭</td><td>Set time</td><td>Set time</td><td>Set time</td><td>Set time</td><td>Set time</td></tr><tr><td>Time-limit NC</td><td>①-⑨, ②-⑩, ③-⑪, ④-⑫</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Time-limit NO</td><td>⑤-⑨, ⑥-⑩, ⑦-⑪, ⑧-⑫</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Output indicator</td><td>UP LED</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Power on indicator</td><td>PW LED</td><td></td><td></td><td></td><td></td><td></td></tr></table>	Power	⑬-⑭	Set time	Set time	Set time	Set time	Set time	Time-limit NC	①-⑨, ②-⑩, ③-⑪, ④-⑫						Time-limit NO	⑤-⑨, ⑥-⑩, ⑦-⑪, ⑧-⑫						Output indicator	UP LED						Power on indicator	PW LED						<div><div><div></div><div></div></div></div>
Power	⑬-⑭	Set time	Set time	Set time	Set time	Set time																																
Time-limit NC	①-⑨, ②-⑩, ③-⑪, ④-⑫																																					
Time-limit NO	⑤-⑨, ⑥-⑩, ⑦-⑪, ⑧-⑫																																					
Output indicator	UP LED																																					
Power on indicator	PW LED																																					

- Select output mode by 2 switches at the bottom of the four switches.

CONTACT

HEAD OFFICE

HANYOUNGNUX CO.,LTD


- 1381-3, Juan-Dong, Nam-Gu Incheon, Korea.
- **TEL:** (82-32)876-4697
- **FAX:** (82-32)876-4696
- <http://www.hynux.net>

INDONESIA FACTORY

PT. HANYOUNG ELECTRONIC INDONESIA

- Jl. Jangari RT.003/002 Hegarmanah Sukaluyu Cianjur Jawa Barat Indonesia 43284
- **TEL:** +62-2140001930

Documents / Resources

	<p>HANYOUNG NUX T21 Digital Counter and Timer [pdf] Instruction Manual T21 Digital Counter and Timer, T21, Digital Counter and Timer, Counter and Timer, Counter, Timer</p>
--	---

References

- **H** [HANYOUNG NUX](#)