


# HIKVISION DS-KH6110-WE1 Network Indoor Station User Guide

## HIKVISION DS-KH6110-WE1 Network Indoor Station

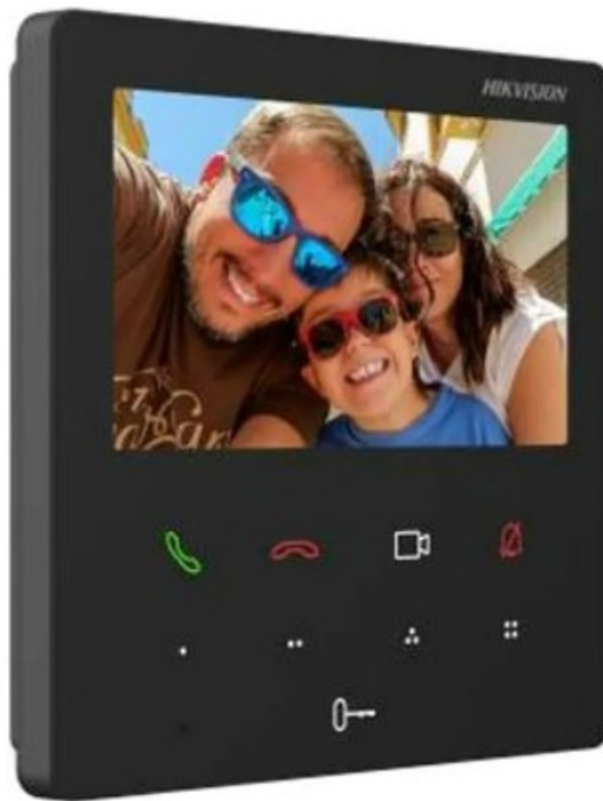

### Contents

- 1 YASIN POST INCOMPLET**
  - 1.1 Wiring
  - 1.2 Installation
  - 1.3 Activation and Quick Operation
  - 1.4 Appearance
  - 1.5 Documents / Resources
    - 1.5.1 References
  - 1.6 Related Posts

---

## YASIN POST INCOMPLET


### Wiring

There is one network interface and one 12 VDC power interface on the rear panel of the indoor station.



**Note:** You can power on the device via the power interface with 12 VDC power supply. Or you can power on the

device via standard PoE through the network interface.

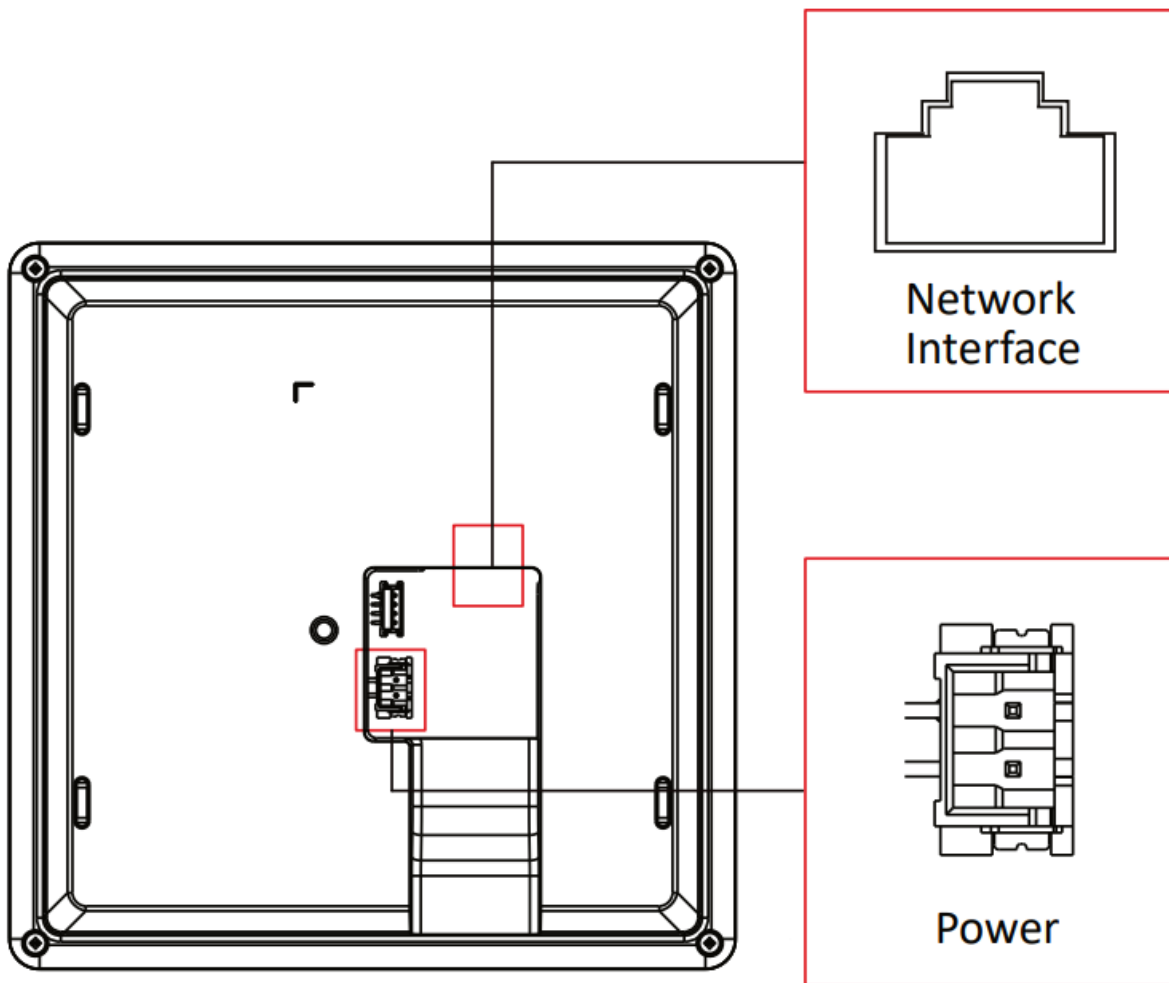

## Installation

Devices support wall mounting.

### Installation Accessory Description

The wall mounting plate and junction box are required to install the indoor station onto the wall. The dimension of the mounting plate is shown as below.



The mounting plate is supplied. The junction box is not supplied.


### Before You Start

Make sure the device in the package is in good condition and all the assembly parts are included.

The power supply the indoor station supported is 12 VDC. Or the standard PoE is supported. Please make sure your power supply matches your indoor station.


Make sure all related equipments are powered-off during the installation.

Check the product specification for the installation environment.

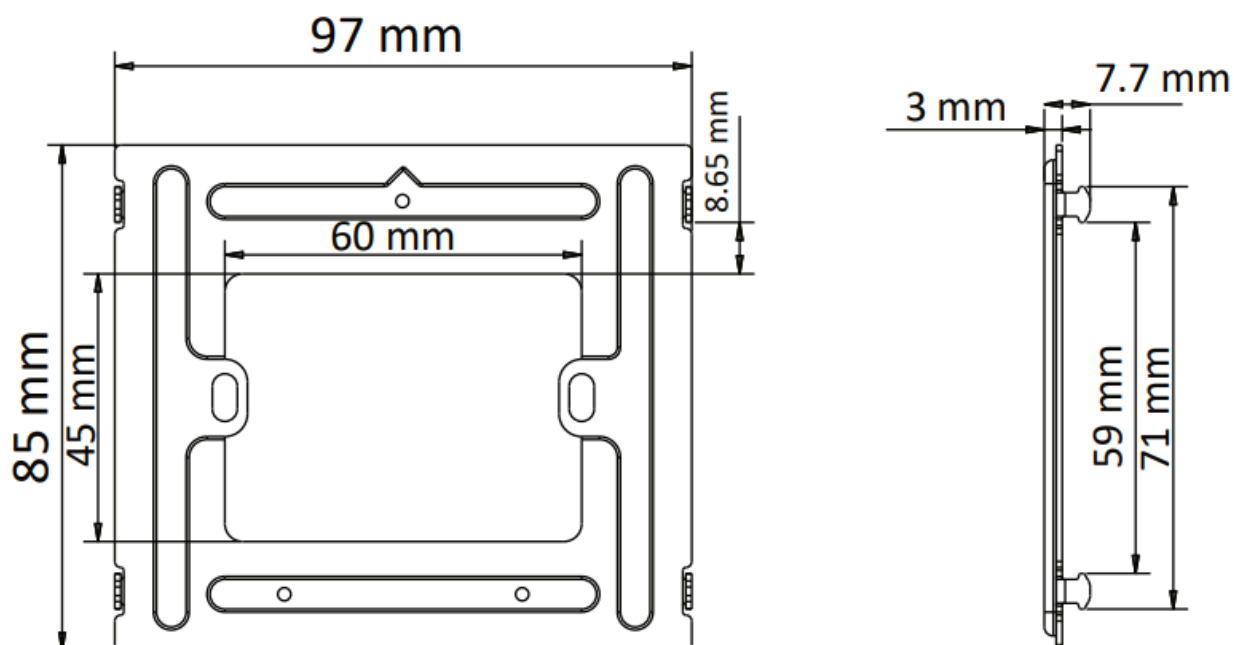

### Wall Mounting with Junction Box

1. Chisel a hole in the wall. Insert the junction box to the hole.
2. Fix the wall mounting plate to the junction box with 2 SCKM4X25 screws.
3. Hook the indoor station to the wall mounting plate tightly by inserting the plate hooks into slots on the rear panel of the indoor station, during which the lock catch will be locked automatically.

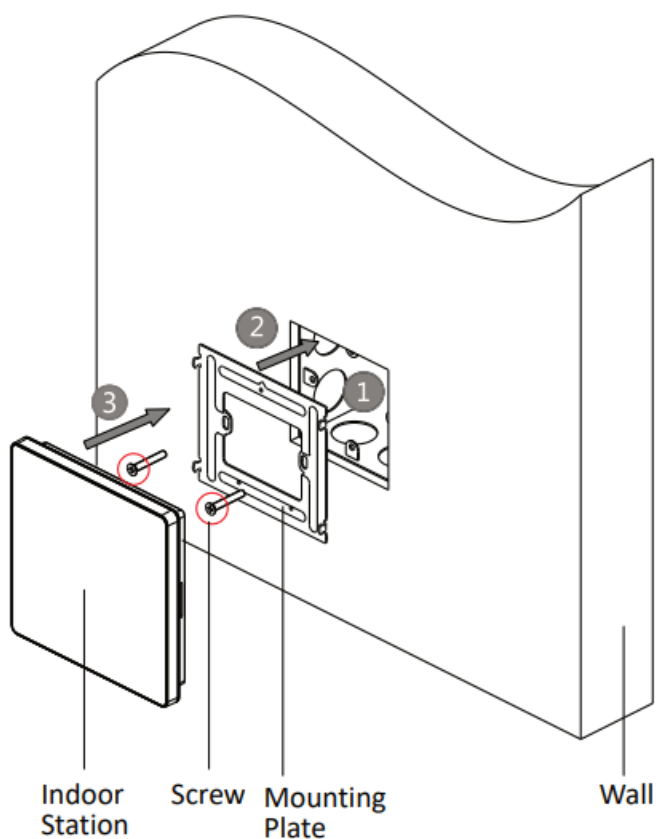

### Activation and Quick Operation

**Activation of DS-KH6110-WE1** After powering on, the device will automatically enter the page of **Language**

## Settings.

1. Select language and tap OK.
2. Create an activation password and confirm the password. Tap OK.

### Quick Operation of DS-KH6110-WE1

After setting language and activation password, you will need to finish a quick operation by following the wizard.

1. Set password reset method and tap Next.
  - Enter the Reserved Email address, and then you can reset the password by email. Tap Change to Security Question to modify the password reset method.
2. Set Network parameters and tap Next.
3. Configure the Indoor Station and tap Next.
4. Enable Wi-Fi function, select a Wi-Fi and enter the password to link. Tap Next.
5. Set Time parameters and tap Next.
6. Tap to enable the Hik-Connect Service and tap Next.
7. Select a door station from the list or enter the serial No. to search for the device. Tap the selected device to link. Tap Next.
8. Tap to enable Indoor Extension. Select an extension from the list or enter the serial No. to search for the device. Tap the selected device to link.
9. Tap Finish to save the settings.

### Activate DS-KH6100-E1/DS-KH6000-E1 via iVMS-4200 Client Software



You can only configure and operate the device after creating a password for the device activation.

1. Power on the device.
2. Run the client software, click **Maintenance and Management** → **Device Management** → **Device** to enter the page.
3. Click Online Device to show the online device area. The searched online devices are displayed in the list.
4. Check the device status (shown on **Security Level** column) and select your device.
5. Click **Activate** to open the Activation dialog.
6. Create a password in the password field, and confirm the password.
7. Click **OK** to activate the device.



#### STRONG PASSWORD RECOMMENDED—

We highly recommend you create a strong password of your own choosing (using a minimum of 8 characters, including upper case letters, lower case letters, numbers, and special characters) in order to increase the security of your product.


And we recommend you reset your password regularly, especially in the high security system, resetting the password monthly or weekly can better protect your product.


## Appearance




The pictures here are for reference only.


1. Touch Button (Answer the call/Hang up the call/Live View/Mute)
2. Customizable Touch Button
3. MIC
4. Unlock Touch Button
5. Screen
6. Speaker
7. Serial Port (For Debugging Use Only)
8. Network Interface
9. Power Interface
10. Touch Button (Answer the call/Unlock/Hang up the call/Volume/Mute)
11. Customizable Touch Button
12. MIC
13. Speaker
14. Serial Port (For Debugging Use Only)
15. Network Interface
16. Power Interface

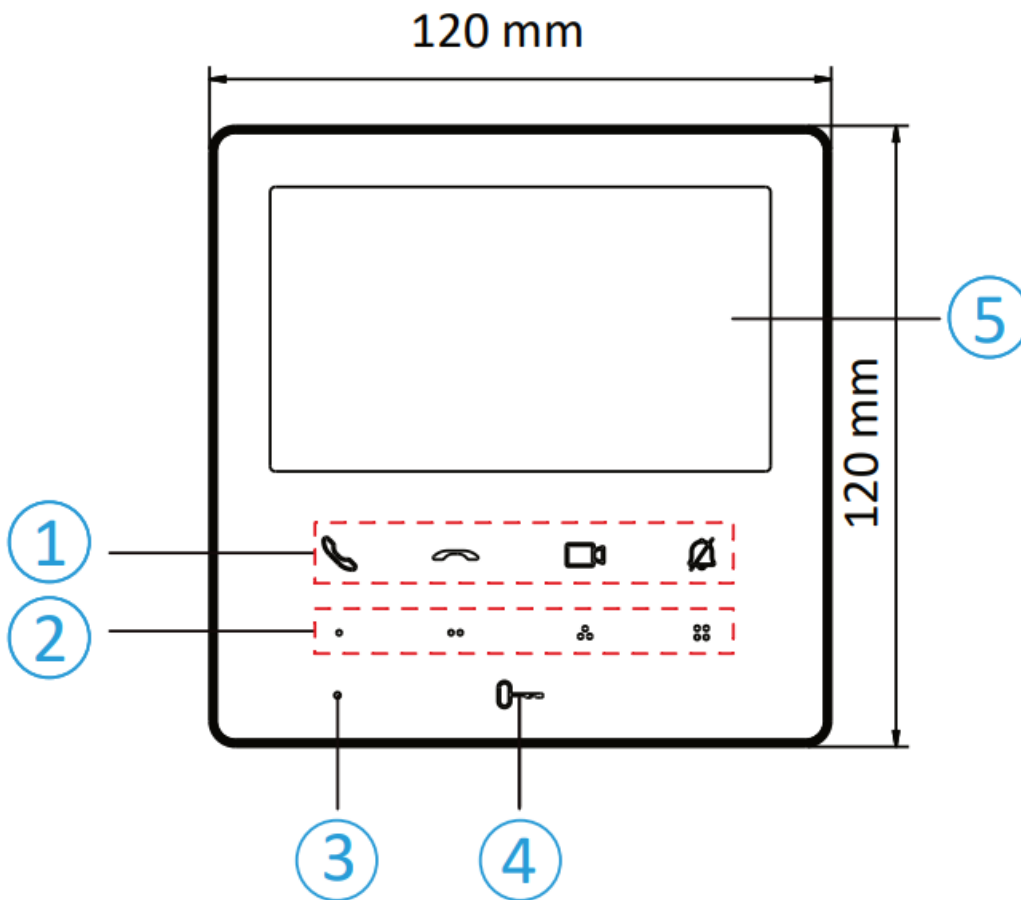

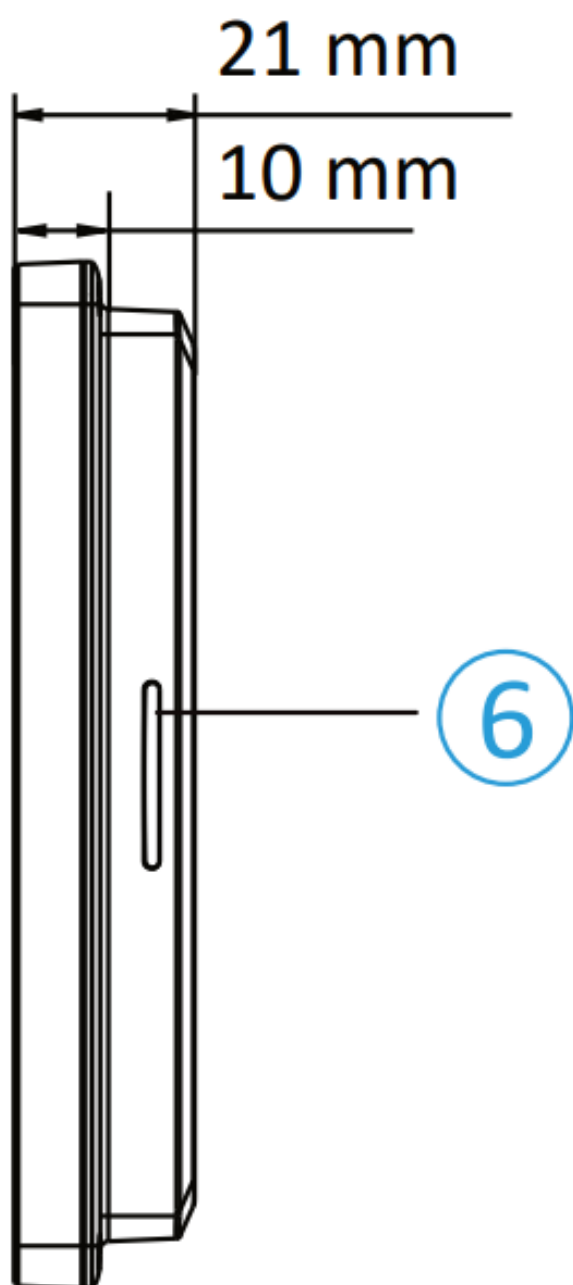

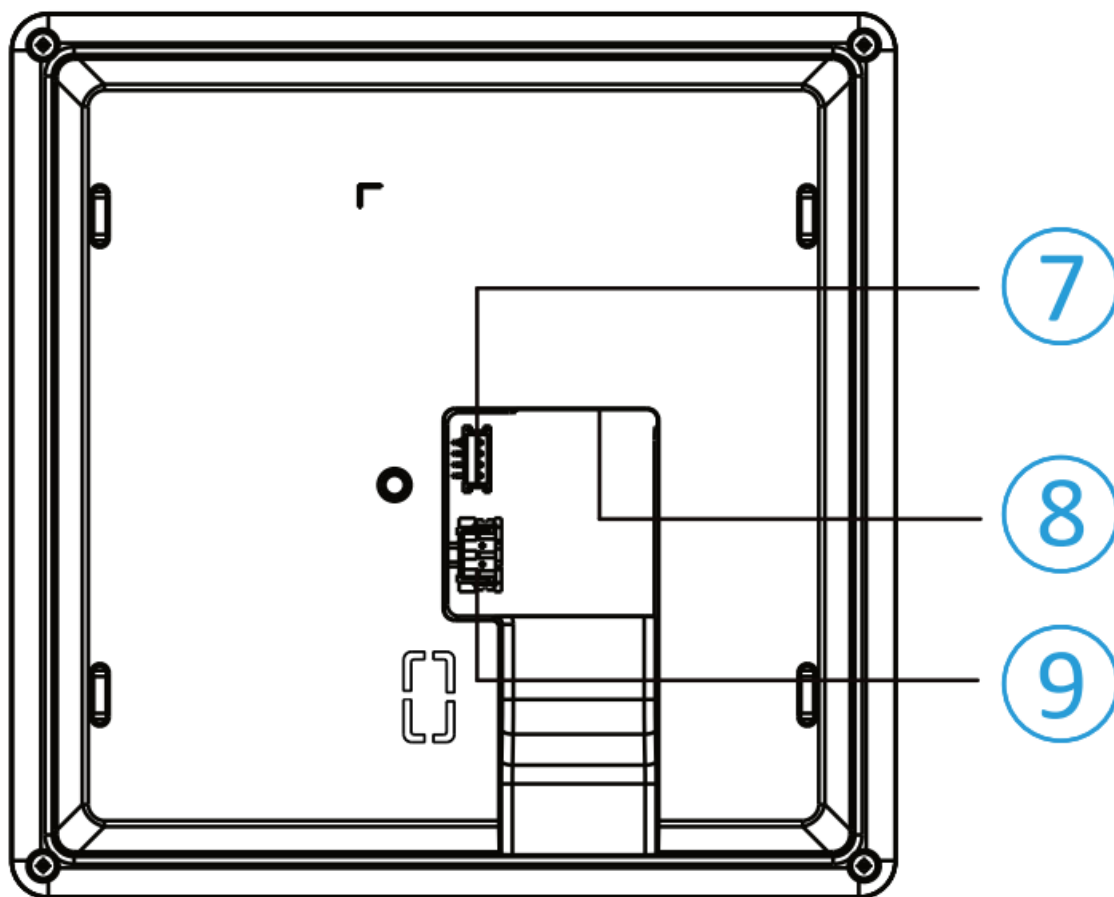


DS-KH6110-WE1/DS-KH6100-E1

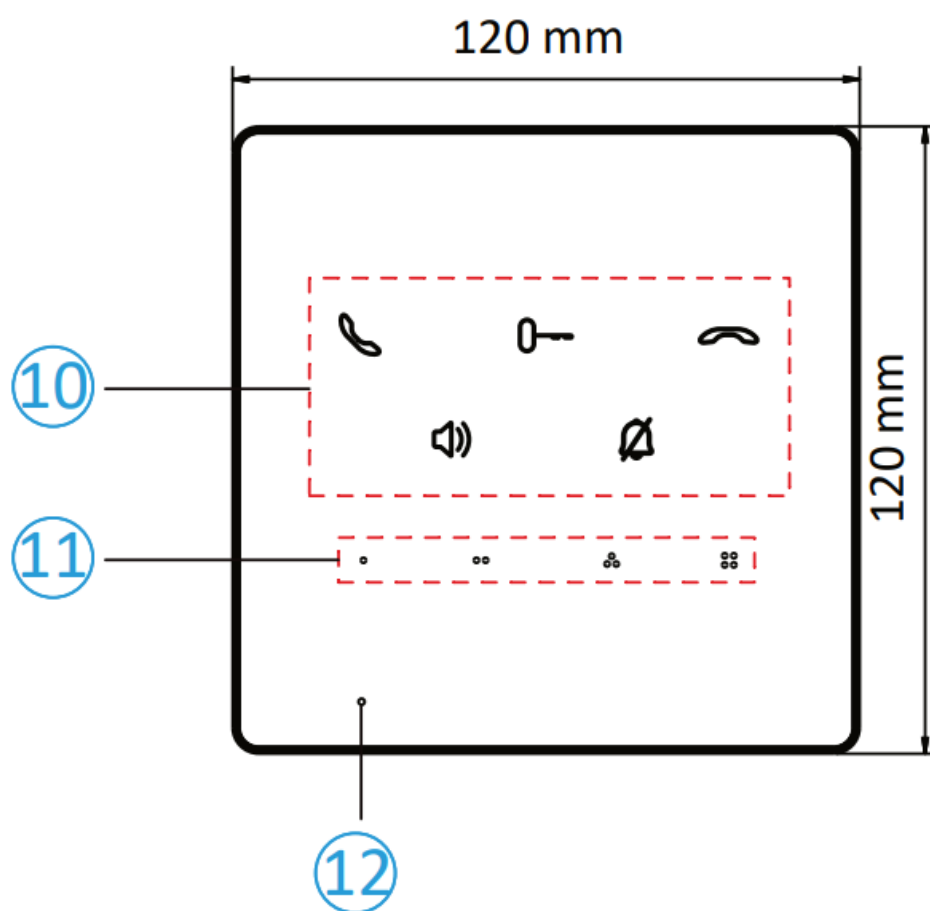


21 mm

10 mm

13

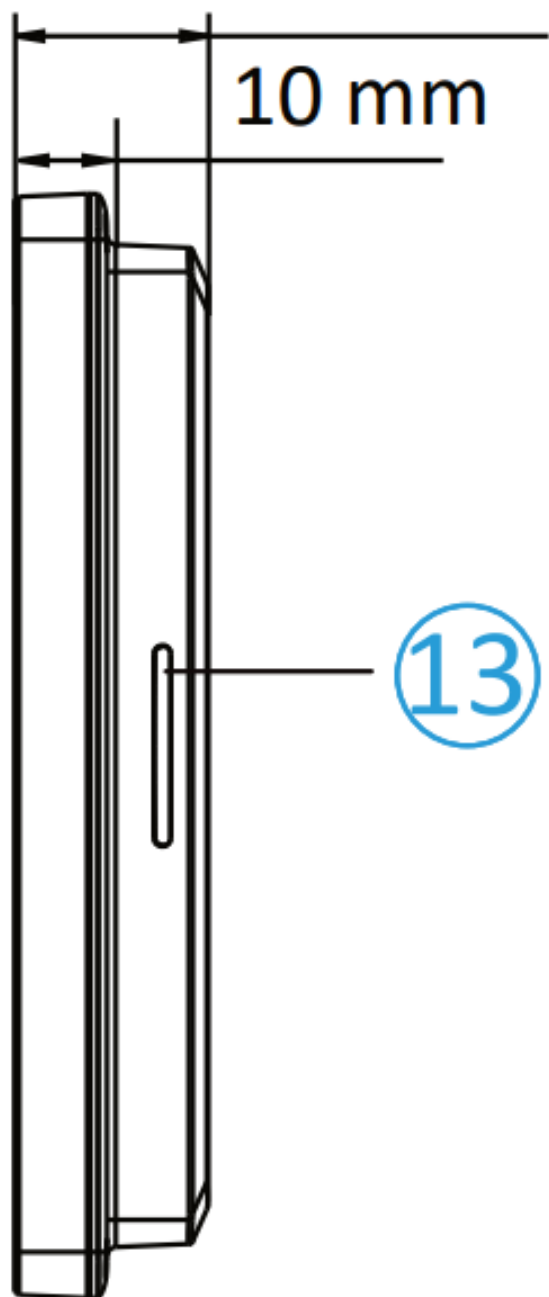



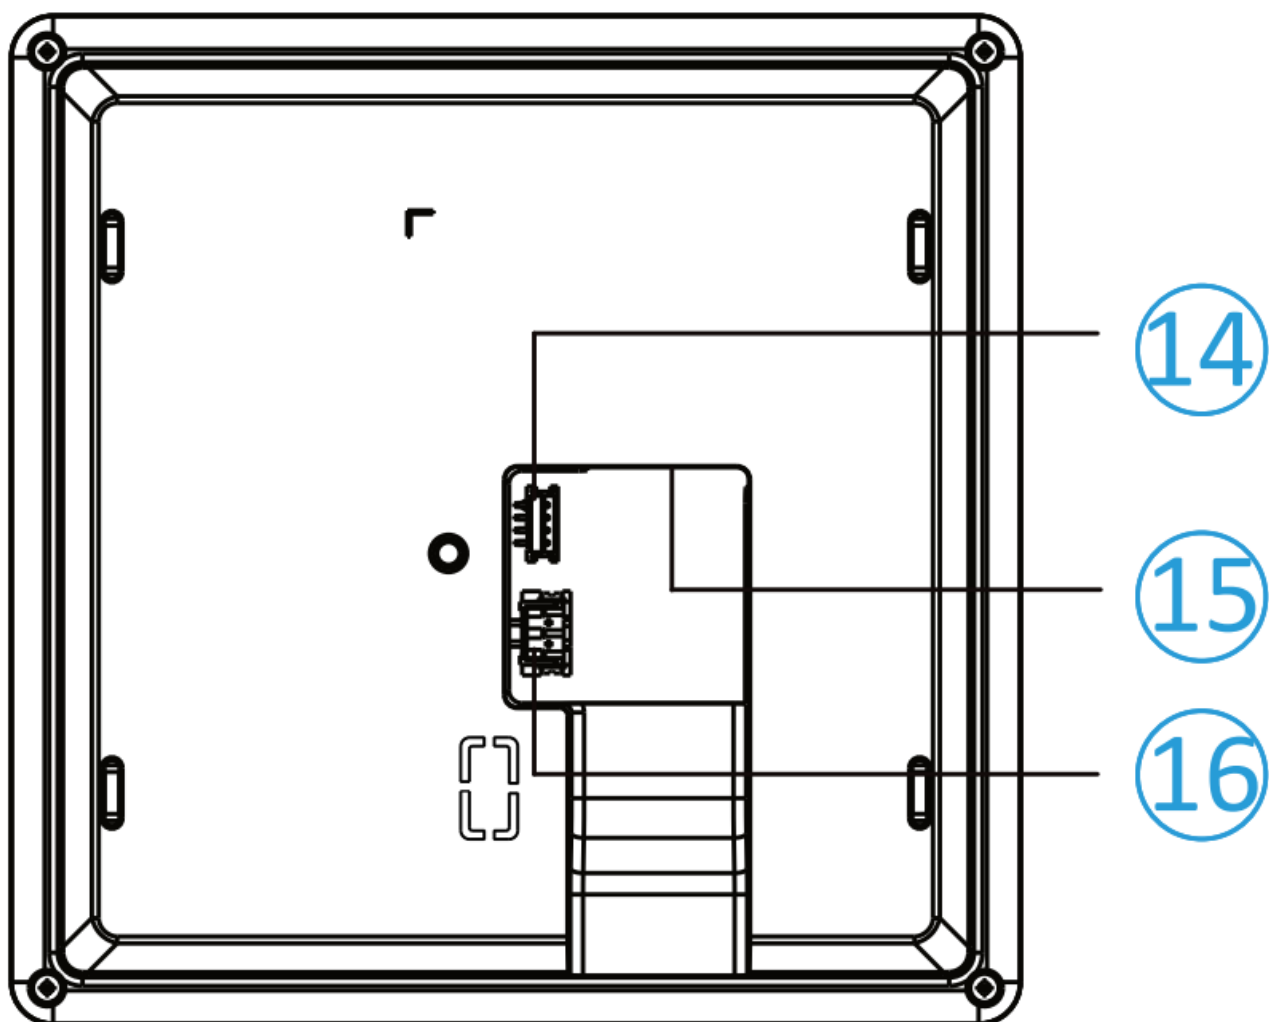

DS-KH6000-E1

Touch Button Function for Devices with a Non-touch Screen

**Return**



**Previous**



**Next**



OK



Scan the QR code to get the User Manual.

**DS-KH6110-WE1**



**DS-KH6100-E1**



DS-KH6000-E1



About this Document

- This Document includes instructions for using and managing the Product. Pictures, charts, images and all other information herein are for description and explanation only.
- The information contained in the Document is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version of the Document at the Hikvision website (<https://www.hikvision.com>). Unless otherwise agreed, Hangzhou Hikvision Digital Technology Co., Ltd. or its affiliates (hereinafter referred to as “Hikvision”) makes no warranties, express or implied.
- Please use the Document with the guidance and assistance of professionals trained in supporting the Product.

#### About this Product

This product can only enjoy the after-sales service support in the country or region where the purchase is made.

#### Acknowledgment of Intellectual Property Rights

- Hikvision owns the copyrights and/or patents related to the technology embodied in the Products described in this Document, which may include licenses obtained from third parties.
- Any part of the Document, including text, pictures, graphics, etc., belongs to Hikvision. No part of this Document may be excerpted, copied, translated, or modified in whole or in part by any means without written permission of Hikvision in various jurisdictions.
- Other trademarks and logos mentioned are the properties of their respective owners.

#### LEGAL DISCLAIMER

- TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THIS DOCUMENT AND THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, ARE PROVIDED “AS IS” AND “WITH ALL FAULTS AND ERRORS”. HIKVISION MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE. THE USE OF THE PRODUCT BY YOU IS AT YOUR OWN RISK. IN NO EVENT WILL HIKVISION BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA, CORRUPTION OF SYSTEMS, OR LOSS OF DOCUMENTATION, WHETHER BASED ON BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), PRODUCT LIABILITY, OR OTHERWISE, IN CONNECTION WITH THE USE OF THE PRODUCT, EVEN IF HIKVISION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR LOSS.
- YOU ACKNOWLEDGE THAT THE NATURE OF THE INTERNET PROVIDES FOR INHERENT SECURITY RISKS, AND HIKVISION SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER-ATTACK, HACKER ATTACK, VIRUS INFECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, HIKVISION WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED.
- YOU AGREE TO USE THIS PRODUCT IN COMPLIANCE WITH ALL APPLICABLE LAWS, AND YOU ARE SOLELY RESPONSIBLE FOR ENSURING THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. ESPECIALLY, YOU ARE RESPONSIBLE, FOR USING THIS PRODUCT IN A MANNER THAT DOES NOT INFRINGE ON THE RIGHTS OF THIRD PARTIES, INCLUDING WITHOUT LIMITATION, RIGHTS OF PUBLICITY, INTELLECTUAL PROPERTY RIGHTS, OR DATA PROTECTION AND OTHER PRIVACY RIGHTS. YOU SHALL NOT USE THIS PRODUCT FOR ANY PROHIBITED END-USES, INCLUDING THE DEVELOPMENT OR PRODUCTION OF WEAPONS OF MASS DESTRUCTION, THE DEVELOPMENT OR PRODUCTION OF CHEMICAL OR BIOLOGICAL WEAPONS, ANY ACTIVITIES IN THE CONTEXT RELATED TO ANY NUCLEAR EXPLOSIVE OR UNSAFE NUCLEAR FUEL-CYCLE, OR IN SUPPORT OF HUMAN RIGHTS ABUSES.
- IN THE EVENT OF ANY CONFLICTS BETWEEN THIS DOCUMENT AND THE APPLICABLE LAW, THE LATTER PREVAILS.


© Hangzhou Hikvision Digital Technology Co., Ltd. All rights reserved





---

## Documents / Resources

|   |   |
|---|---|
|  | <a href="#">HIKVISION DS-KH6110-WE1 Network Indoor Station</a> [pdf] User Guide<br>DS-KH6110-WE1 Network Indoor Station, DS-KH6110-WE1, Network Indoor Station, Indoor Station, Station |
|---|---|

## References

- [H Hikvision USA - Leading the future of AIoT](#)
- [use IP Hikvision DS-KH6110-WE1 IP-Based Indoor Station](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.