

EY
Dot Round
Small
utton Light



Contents

- [1 HINKLEY 15074SS Dot Round Dot LED Small Round Button Light](#)
- [2 Specifications](#)
- [3 Installation Instructions](#)
- [4 Dimension](#)
- [5 FAQs](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)

HINKLEY

HINKLEY 15074SS Dot Round Dot LED Small Round Button Light



Specifications

- **Brand:** HINKLEY
- **Product Line:** DOT FAMILY
- **Model:** Option 1
- **Item No:** 15074/15084
- **Power System Compatibility:** 12V
- **Safety Warning:** Turn the power supply off during installation. Consult a qualified electrician for new wiring.

Installation Instructions


1. Find a clear area in which you can work.
2. Unpack the fixture and glass from the carton.
3. Carefully review instructions prior to assembly.

SAFETY WARNING: TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITY FOR CODE REQUIREMENTS.


- For use with 12V power systems.

1. The fixture can be mounted in 3 different ways


- Option 1 Surface Mount into 1/4" or Deeper Wall Depth using 1 " Drill

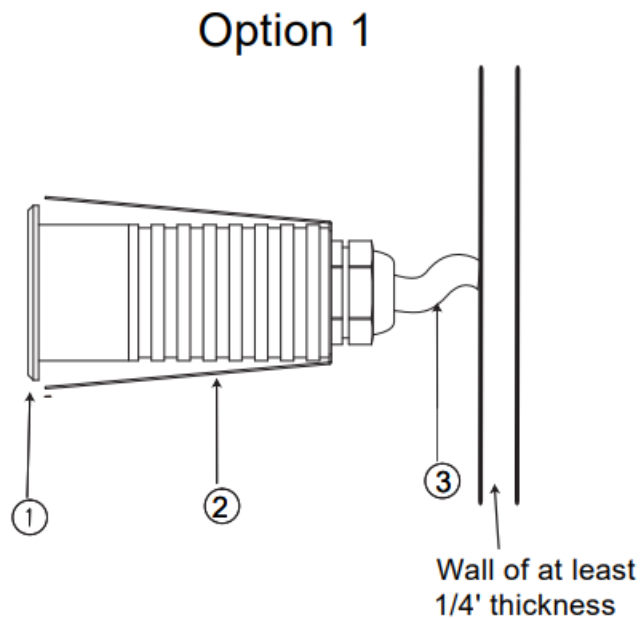

- Option 2 Cast in Concrete Mount (prior to obtaining fixture), cut 1" SCH40 Plumbing or Draining PVC to 4.5+'' length

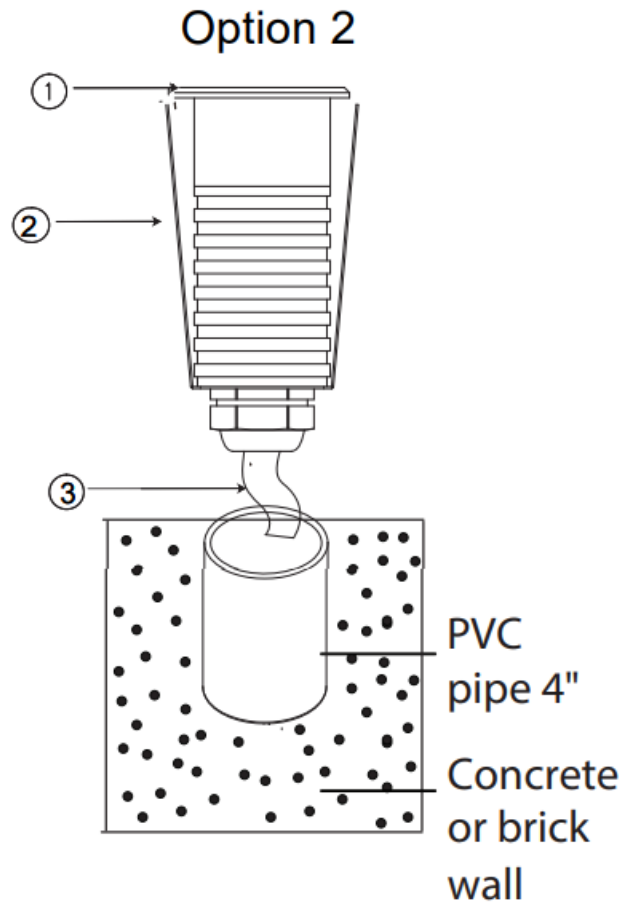

- Option 3: Cast in or Bury in Sleeve Mount -using provided extruded PVC

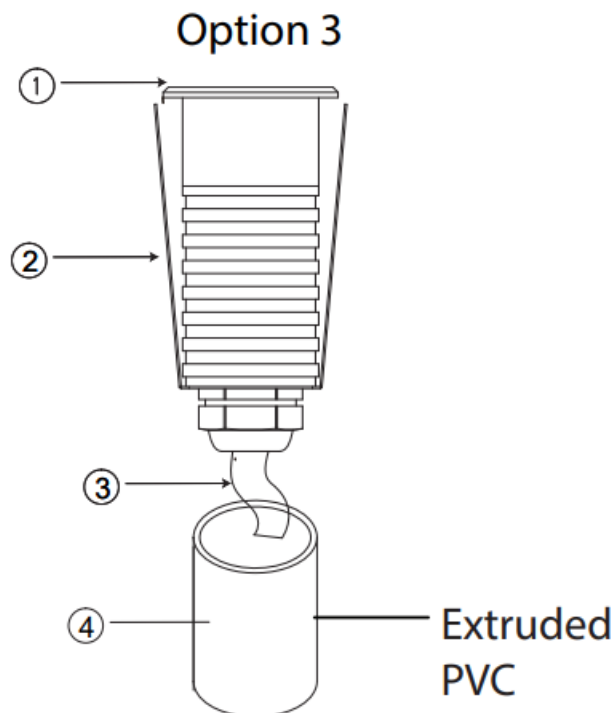


2. Remove excess wire and use the applicable tool to remove the outer jacket of the cable to expose the Positive (black) and Negative (white) lead wires.
3. Strip the two wire leads (3) from the Luminaire and connect to the main supply wire using the provided filled wirenut. Silicone-filled are intended for one-time use. Wire Nut Capacity -2 pcs 18 AWG 2 pcs 12 AWG
4. Place fixture housing (2) and front cover into the mounting sleeve (4), PVC sleeve, or wall
5. The fixture is now ready to be powered on.

Note: Multiple fixtures can be wired to one transformer or power source. Please refer to the specifications of the

power source or transformer for information on the maximum load.

Dimension

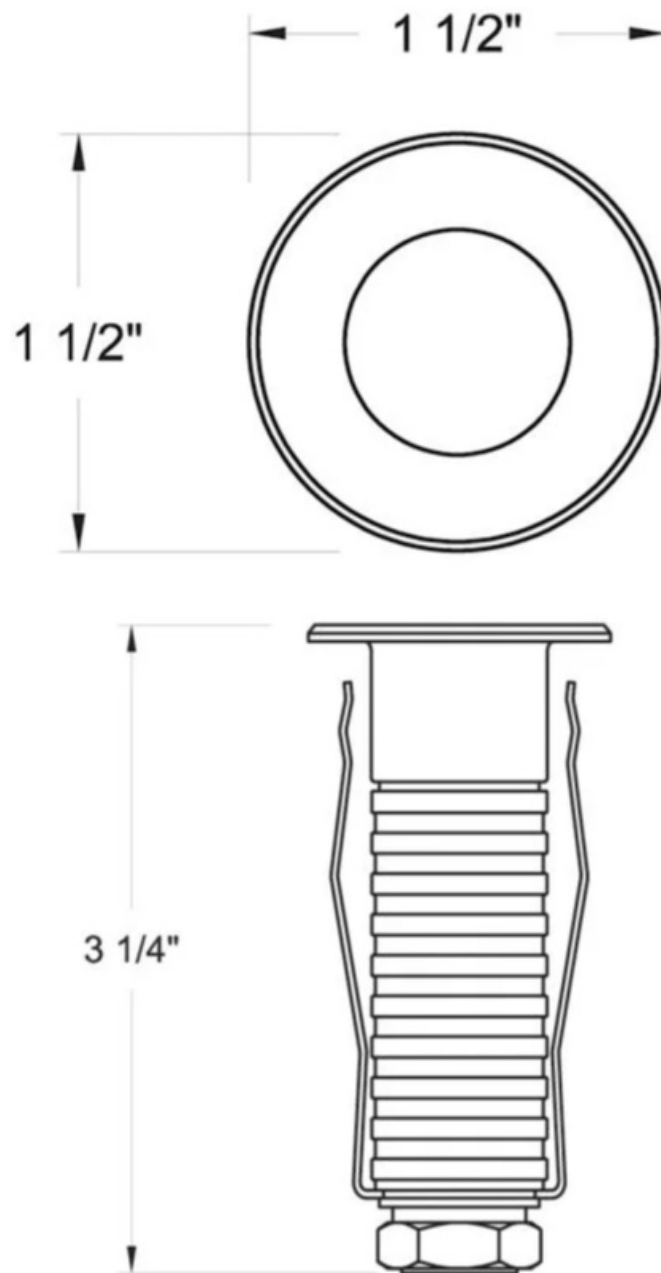

HINKLEY 33000 Pin Oak Parkway, Avon Lake, OH 44012 800.446.5539 / 440.653.5500 hinkley.com

FAQs

Q: Can I connect multiple fixtures to one power source?

A: Yes, multiple fixtures can be wired to one transformer or power source. Ensure not to exceed the maximum load specified by the power source.

Q: What should I do if new wiring is required?


A: Consult a qualified electrician or local authority for code requirements when new wiring is needed for installation.

Q: How do I strip the wire leads?

A: Use an applicable tool to remove the outer jacket of the cable and strip the wire leads to expose the Positive

(black) and Negative (white) lead wires.

Documents / Resources

	HINKLEY 15074SS Dot Round Dot LED Small Round Button Light [pdf] Instruction Manual 15074SS, 15084, 15074SS Dot Round Dot LED Small Round Button Light, 15074SS, Dot Round Dot LED Small Round Button Light, LED Small Round Button Light, Small Round Button Light, Round Button Light, Button Light
---	--

References

- H [HINKLEY](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.