

Risco RWX73M

Risco RWX73M Wireless Bidirectional Door/Window Opening Detector

User Manual

Model: RWX73M | Brand: Risco

1. INTRODUCTION

The Risco RWX73M is a wireless bidirectional opening detector designed for monitoring doors and windows. It provides reliable security by detecting unauthorized opening and communicating with a compatible Risco alarm system, such as the Agility series. Its bidirectional communication ensures enhanced security and system integrity.

2. SAFETY INFORMATION

- Read all instructions carefully before installation and operation.
- Do not attempt to disassemble or repair the device. Refer all servicing to qualified personnel.
- Keep the device away from water, moisture, and extreme temperatures.
- Ensure proper disposal of the device and any internal batteries according to local regulations.
- This device is part of a security system; ensure the entire system is installed and maintained correctly for optimal performance.

3. PACKAGE CONTENTS

Please check the package for the following items:

- Risco RWX73M Contact Unit
- Magnet Unit
- Mounting Screws/Adhesive (may vary by package)
- Quick Start Guide (this manual provides detailed information)

4. SETUP AND INSTALLATION

The RWX73M consists of two main parts: the contact unit and the magnet unit. For proper operation, these two parts must be installed in close proximity to each other on a door or window frame.



Image: The Risco RWX73M wireless door/window opening detector, showing the main contact unit and the smaller magnet unit.

4.1. Choosing a Location

Install the detector on the frame of the door or window you wish to monitor. The contact unit should be mounted on the stationary part (frame), and the magnet unit on the moving part (door/window). Ensure the two units are aligned and within 1 cm of each other when the door/window is closed.

4.2. Mounting the Units

1. **Prepare the Surface:** Clean the mounting surface thoroughly to ensure good adhesion if using adhesive, or to mark screw holes accurately.
2. **Mount the Contact Unit:** Secure the larger contact unit to the door/window frame using the provided screws or adhesive strips.
3. **Mount the Magnet Unit:** Secure the smaller magnet unit to the door or window itself, ensuring it aligns with the marked area on the contact unit when the door/window is closed. The gap between the two units should be minimal (ideally less than 1 cm).
4. **Test Alignment:** Close the door/window and verify that the contact and magnet units are perfectly aligned.

4.3. Pairing with Risco Agility System

The RWX73M must be enrolled into your Risco Agility alarm system. Refer to your Risco Agility system's installation manual for detailed instructions on enrolling wireless detectors. Generally, this involves:

- Putting the Agility panel into enrollment mode.
- Activating the RWX73M (e.g., by opening and closing the door/window, or pressing a tamper switch if available).
- Confirming successful enrollment on the panel.

Ensure the detector is assigned to the correct zone and configured with appropriate attributes (e.g., entry/exit, perimeter).

5. OPERATION

Once installed and successfully paired with your Risco Agility system, the RWX73M operates automatically:

- When the door or window is *closed*, the contact unit and magnet unit are in close proximity, indicating a secure state.
- When the door or window is *opened*, the magnet unit moves away from the contact unit. The RWX73M detects this separation and immediately transmits a signal to the Risco Agility alarm panel.
- The alarm panel then processes this signal according to its programming (e.g., triggers an alarm if the system is armed, logs the event).
- The bidirectional communication allows the panel to monitor the detector's status, including battery life and supervision signals.

6. MAINTENANCE

The Risco RWX73M is designed for low maintenance. However, periodic checks are recommended:

- **Cleaning:** Gently wipe the exterior of the units with a soft, dry cloth to remove dust or dirt. Do not use abrasive cleaners or solvents.
- **Battery Status:** The device is designed with an internal, long-life battery. Your Risco Agility alarm panel will typically indicate a low battery condition for the detector. When a low battery signal is received, contact your alarm system installer or Risco support for service, as the battery is generally not user-replaceable.
- **Functionality Test:** Periodically test the detector by arming your system and opening the monitored door/window to ensure it triggers the alarm as expected.

7. TROUBLESHOOTING


Problem	Possible Cause	Solution
Detector not responding / No alarm when opened	Not properly enrolled with the panel. Incorrect alignment of contact and magnet units. Low or depleted internal battery. Out of range from the alarm panel.	Re-enroll the detector with the Risco Agility panel. Adjust the position of the units for proper alignment (gap < 1 cm). Check panel for low battery indication; contact service if needed. Relocate the detector closer to the panel or consider a wireless repeater.
False alarms	Loose mounting. Vibrations causing temporary separation. Environmental interference.	Ensure units are securely mounted. Check for structural issues causing movement. Consult with your installer to diagnose potential interference.
Panel indicates communication loss with detector	Detector is out of range. Radio interference. Internal battery issue.	Relocate the detector or panel. Identify and mitigate sources of interference. Contact service for battery check/replacement.

8. SPECIFICATIONS

Feature	Detail
Manufacturer	Risco
Part Number	RWX73M
Item Weight	81.65 g
Model Number (Item)	1
Batteries Included?	No (refers to user-replaceable; device has internal battery)
Batteries Required?	No (refers to user-replaceable; device has internal battery)
ASIN	B07R287PS5
Guaranteed Software Updates Until	Unknown
First Available Date	December 27, 2019
Outdoor Range	Up to 300 m
Contact Unit Dimensions (H x W x D)	72 x 35 x 32 mm
Magnet Unit Dimensions (H x W x D)	72 x 11 x 16 mm
Compatibility	Risco Agility systems

9. WARRANTY AND SUPPORT

For warranty information and technical support regarding your Risco RWX73M detector, please refer to the documentation provided with your complete Risco alarm system or visit the official Risco website. It is recommended to contact your authorized Risco installer or dealer for any service or support needs. You can typically find support resources, FAQs, and contact information on the official Risco website: www.riscogroup.com

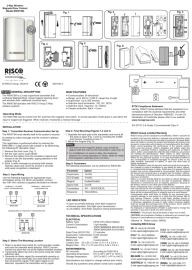	RISCO Group RWX73M 2-Way Wireless Magnetic Door Contact - Installation and Specifications Comprehensive guide for the RISCO Group RWX73M 2-Way Wireless Magnetic Door Contact, detailing installation, features, technical specifications, and warranty information. This device provides supervised magnetic contact for doors and windows, with an additional universal input.
	RISCO Group ProSYS Plus and LightSYS 2 Security Systems Product Guide A comprehensive product guide detailing RISCO Group's ProSYS Plus and LightSYS 2 integrated security systems, including panels, expanders, detectors, and accessories. Features and specifications for various models are provided.
	LuNAR 150DTG3 Ceiling Motion Detector Installation and Technical Guide Comprehensive guide for the RISCO LuNAR 150DTG3 ceiling motion detector, covering installation, maintenance, technical specifications, jumper settings, terminal wiring, LED indicators, and warranty information.
	RISCO iWISE RK815DTGL/RK825DTGL Motion Detector Installation and Technical Specifications Comprehensive guide to the RISCO iWISE RK815DTGL and RK825DTGL motion detectors, covering installation, jumper settings, technical specifications, features like ACT™ and Green Line, and warranty information.
	WatchIN RK325DT Industrial Grade 3 Detector Installation Guide Installation instructions for the RISCO Group WatchIN RK325DT Dual Technology Industrial Grade 3 Detector, covering Relay and BUS modes, mounting, wiring, DIP settings, and system parameters.
	RISCO WL RWS401 External Wireless Sounder: Installation and Programming Guide Comprehensive installation and programming instructions for the RISCO WL RWS401 External Wireless Sounder. Learn about its features, mounting, setup, and technical specifications for security systems.

RISCO
A LIFETIME OF SECURITY

2-Way Wireless Magnetic Door/Window Contact with Shutter
Models: **RWX73M, RWX73MA, RWX73MA8BR, RWX73MA8BL, RWX73M8BL & RWX73MBR**

EN IT FR ES SE

CONTACTING RISCO GROUP

ITALY: Tel: +39-02-66590054 E-mail: support-it@riscogroup.com
CHINA: Hu Tel: +86-21-52390066 E-mail: support-cn@riscogroup.com
SPAIN: Tel: +34-91-490-2133 E-mail: support-es@riscogroup.com
ISRAEL: Tel: +972-3-963-7777 E-mail: support-b@riscogroup.com

USA: Tel: +1-631-719-4400 E-mail: support-usa@riscogroup.com
UK: Tel: +44-(0)-161-646-5000 E-mail: support-uk@riscogroup.com
FRANCE: Tel: +33-164-73-28-50 E-mail: support-fr@riscogroup.com
BELGIUM: Tel: +32-2822-7622 E-mail: support-b@riscogroup.com

TECHNICAL SPECIFICATION

ELECTRICAL	Mechanism type: ASS
Battery Type: eCR123 3V Lithium Battery	Battery Life: 5 years typical
Current Consumption: Standby: 40 nA max	Low Battery: 2.5 V
Frequency: RWX73M8BL: 86.43 MHz White RWX73M8BR: 86.43 MHz Brown RWX73M8BL: 86.43 MHz Black RWX73M8BL: 433.92 MHz White	Contact Size: 32 x 35 x 72 mm (1.3 x 1.4 x 2.8 in) Magnet Size: 16 x 31 x 72 mm (0.6 x 0.44 x 2.8 in) Supply power: 120mV Max
Dead Time (HOLD ON): 2.5 minutes	ENVIRONMENTAL
Supervision: 76 minutes min. 0-15 minutes	Operating temperature: -10°C ~ 55°C (14°F ~ 131°F)
By indications are subject to change without prior notice	Storage temperature: -20°C ~ 60°C (-4°F ~ 140°F)
Should any questions arise please contact your supplier	RF immunity: According to EN50130-4

1

[pdf] Instructions Specifications

5IN2405 K 2W WL Magnet Shutter RWX73M Instructions ML WEB RWX73M43300D silmarelectronics |||

2-Way Wireless Magnetic Door/Window Contact with Shutter Models: **RWX73M, RWX73MA, RWX73MA8BR, RWX73MA8BL, RWX73M8BL RWX73MBR SE**

CONTACTING RISCO GROUP ITALY: Tel: 39-02-66590054 E-mail: support-it

riscogroup.com CHINA: Hu Tel: 86-21-52390066 E-mail: support-cn riscogroup.com

SPAIN: Tel: 34-...

lang:it **score:41** filesize: 549.81 K page_count: 16 document date: 2021-11-25

RISCO
A LIFETIME OF SECURITY

2-Way Wireless Magnetic Door/Window Contact with Shutter
Models: **RWX73M, RWX73MA, RWX73MA8BR, RWX73MA8BL, RWX73M8BL & RWX73MBR**

EN IT FR ES SE

CONTACTING RISCO GROUP

ITALY: Tel: +39-02-66590054 E-mail: support-it@riscogroup.com
CHINA: Hu Tel: +86-21-52390066 E-mail: support-cn@riscogroup.com
SPAIN: Tel: +34-91-490-2133 E-mail: support-es@riscogroup.com
ISRAEL: Tel: +972-3-963-7777 E-mail: support-b@riscogroup.com

USA: Tel: +1-631-719-4400 E-mail: support-usa@riscogroup.com
UK: Tel: +44-(0)-161-646-5000 E-mail: support-uk@riscogroup.com
FRANCE: Tel: +33-164-73-28-50 E-mail: support-fr@riscogroup.com
BELGIUM: Tel: +32-2822-7622 E-mail: support-b@riscogroup.com

TECHNICAL SPECIFICATION

ELECTRICAL	Mechanism type: ASS
Battery Type: eCR123 3V Lithium Battery	Battery Life: 5 years typical
Current Consumption: Standby: 40 nA max	Low Battery: 2.5 V
Frequency: RWX73M8BL: 86.43 MHz White RWX73M8BR: 86.43 MHz Brown RWX73M8BL: 86.43 MHz Black RWX73M8BL: 433.92 MHz White	Contact Size: 32 x 35 x 72 mm (1.3 x 1.4 x 2.8 in) Magnet Size: 16 x 31 x 72 mm (0.6 x 0.44 x 2.8 in) Supply power: 120mV Max
Dead Time (HOLD ON): 2.5 minutes	ENVIRONMENTAL
Supervision: 76 minutes min. 0-15 minutes	Operating temperature: -10°C ~ 55°C (14°F ~ 131°F)
By indications are subject to change without prior notice	Storage temperature: -20°C ~ 60°C (-4°F ~ 140°F)
Should any questions arise please contact your supplier	RF immunity: According to EN50130-4

1

[pdf] Instructions Specifications

5IN2405 K 2W WL Magnet Shutter RWX73M Instructions ML WEB RISCO RWX73F Contacto Magnetico

Inalambrico 2 vias Para PControl Remoto Inalámbrico de 4 canales PANDA Llaverio Inalcdn tvc mx media

332258 WEBcdn |||

2-Way Wireless Magnetic Door/Window Contact with Shutter Models: **RWX73M, RWX73MA, RWX73MA8BR, RWX73MA8BL, RWX73M8BL RWX73MBR SE**

CONTACTING RISCO GROUP ITALY: Tel: 39-02-66590054 E-mail: support-it

riscogroup.com CHINA: Hu Tel: 86-21-52390066 E-mail: support-cn riscogroup.com

SPAIN: Tel: 34-...

lang:it **score:38** filesize: 549.81 K page_count: 16 document date: 2021-11-25

RISCO
A LIFETIME OF SECURITY

2-Way Wireless Magnetic Door/Window Contact with Shutter
Models: **RWX73M, RWX73MA8BL & RWX73MBR**

EN IT FR ES SE

CONTACTING RISCO GROUP

ITALY: Tel: +39-02-66590054 E-mail: support-it@riscogroup.com
CHINA: Hu Tel: +86-21-52390066 E-mail: support-cn@riscogroup.com
SPAIN: Tel: +34-91-490-2133 E-mail: support-es@riscogroup.com
ISRAEL: Tel: +972-3-963-7777 E-mail: support-b@riscogroup.com

USA: Tel: +1-631-719-4400 E-mail: support-usa@riscogroup.com
UK: Tel: +44-(0)-161-646-5000 E-mail: support-uk@riscogroup.com
FRANCE: Tel: +33-164-73-28-50 E-mail: support-fr@riscogroup.com
BELGIUM: Tel: +32-2822-7622 E-mail: support-b@riscogroup.com

TECHNICAL SPECIFICATION

ELECTRICAL	Battery Life: 5 years typical
Battery Type: eCR123 3V Lithium Battery	Low Battery: 2.5 V
Current Consumption: Standby: 40 nA max	Contact Size: 32 x 35 x 72 mm (1.3 x 1.4 x 2.8 in)
Frequency: RWX73M8BL: 86.43 MHz White RWX73M8BR: 86.43 MHz Brown RWX73M8BL: 86.43 MHz Black RWX73M8BL: 433.92 MHz White	Magnet Size: 16 x 31 x 72 mm (0.6 x 0.44 x 2.8 in) Supply power: 120mV Max
Dead Time (HOLD ON): 2.5 minutes	ENVIRONMENTAL
Supervision: 76 minutes min. 0-15 minutes	Operating temperature: -10°C ~ 55°C (14°F ~ 131°F)
By indications are subject to change without prior notice	Storage temperature: -20°C ~ 60°C (-4°F ~ 140°F)
Should any questions arise please contact your supplier	RF immunity: According to EN50130-4

1

[pdf] User Manual Specifications

5IN2405 I 2W WL Magnet Shutter RWX73M ML WEB David Pressdee Installation Manual


RWX73M86800C EL by RISCO 381028 true securimport web content |||

2-Way Wireless Magnetic Door/Window Contact with Shutter Models: **RWX73M, RWX73M8BL RWX73MBR SE** CONTACTING RISCO GROUP ITALY: Tel: 39-02-

66590054 E-mail: support-it riscogroup.com USA: Tel: 1-631-719-4400 E-mail:

support-usa riscogroup.com CHINA: Hu Tel: 86-21-52390066 E-mail: support-cn ...

lang:it **score:38** filesize: 649.91 K page_count: 16 document date: 2020-12-02

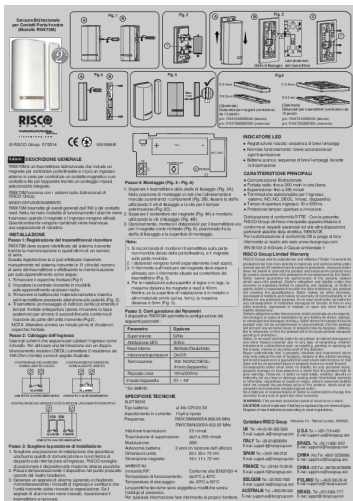


[pdf] Datasheet

Datasheet RWX73M ES RWX73M86800C EL by RISCO 381024 true securimport web content |||
Sensore Bidirezionale A per Contatti Porte/nestre Modello **RWX73M** Fig. 1 B Fig. 2 A
T Fig. 3 B C T A Fig.4 B Fig. 5 Max. 1cm 5 X 4mm Lato posteriore Staffa di ssaggio
del trasmettitore Fig.6 5 X 4mm 5 X 2mm Opzionale Distanziali per magneti
confezione da 10 pezzi : p/n: RAX73MS000...
lang:it **score:32** filesize: 619.38 K page_count: 2 document date: 2014-07-17



[pdf] Instructions Specifications

5IN2405 K 2W WL Magnet Shutter RWX73M Instructions ML 2 Way Wireless Magnetic Door Window
Contact with è un trasmettitore bidirezionale che include magneti per controllare porte finestre e in più
ingresso esterno serie contatto MI INTRUSI N RWX73M86800B e9a7 casmarglobal media akeneo
connector files M I |||
2-Way Wireless Magnetic Door/Window Contact with Shutter Models:**RWX73M**,
RWX73MA, **RWX73MA8BR**, **RWX73MA8BL**, **RWX73M8BL** **RWX73MBR** SE
CONTACTING RISCO GROUP ITALY: Tel: 39-02-66590054 E-mail: support-it
riscogroup.com CHINA: Hu Tel: 86-21-52390066 E-mail: support-cn riscogroup.com
SPAIN: Tel: 34-...
lang:it **score:31** filesize: 541.3 K page_count: 16 document date: 2022-03-02

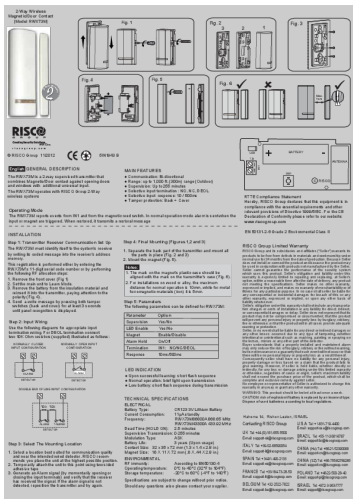


[pdf] Instructions Declaration of Conformity

2 Way Wireless Magnet Door Contact Installation Instructions RISCO Group DIXYS RTTE Compliance
Statement Hereby declares that this equipment is in compliance with the essential requirements and other
relevant provisions of Directive 1999 5 EC Multi dixys pro WebRoot LaPoste Shops box1725 515D 77B5
2437 974A 61AC 0A0C 05EA 0067 |||
2-Way Wireless Magnetic/Door Contact Model **RWX73M** Fig. 1 Fig. 2 3 2 1 Fig. 3 Fig.
4 Fig. 5 - Fig. 6 Max. 1cm RISCO Group 11/2012 5IN1943 English GENERAL
DESCRIPTION The **RWX73M** is a 2-way supervised transmitter that combines
Magnetic/Door contact against opening doors and windows wi...
lang:en **score:30** filesize: 440.44 K page_count: 2 document date: 2013-04-28



[\[pdf\]](#) User Manual Guide Accessories

Microsoft Word 5IN2861 B Agility 4 IM EN SOURCE Ronnie Solomon LSC Page 2 Simplified menu logic only menus of installed devices are displayed according to the authorization code Full voice guided for remote system operation 2021 06 01 — This guide contains proprietary information belonging RISCO Group Such is supplied solely purpose assisting explicitly and Installer Manual lsc au Documents ||| Agility 4 Installer Manual Model: RW132V Important Notice This guide is delivered subject to the f ... nge X73 Parameters This section refers to the programming options of the two-way magnetic contact **RWX73M** and RWX73F. NOTE: After programming X73 parameters and exiting Programming mode, press the T...
lang:en score:29 filesize: 4.74 M page_count: 182 document date: 2020-08-10

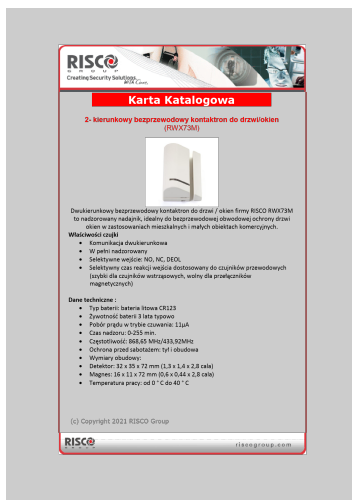


[\[pdf\]](#)

Karta katalogowa RISCO Janex International B2B GO! karta rwx73m8br00d kk rwx73m b2bgo janexint pl files 642 |||
Karta Katalogowa 2- kierunkowy bezprzewodowy kontaktron do drzwi/okien **RWX73M**
Dwukierunkowy bezprzewodowy kontaktron do drzwi / okien firmy RISCO **RWX73M**
to nadzorowany nadajnik, idealny do bezprzewodowej obwodowej ochrony drzwi okien w zastosowaniach mieszkalnych i malych obiektach komercyjnych. W...
lang:pl score:29 filesize: 146.42 K page_count: 1 document date: 2021-05-13



[\[pdf\]](#) User Manual Guide Accessories

Microsoft Word 5IN2861 Agility 4 IM EN SOURCE Ronnie Solomon CR Kennedy NZ Ltd This guide contains proprietary information belonging to RISCO Group Such is supplied solely for the purpose of assisting explicitly and rwk1001 tag manual crkennedy co nz ts1616531358 attachments Product 34980 Agility 4 Installer Manual Model: RW132V Important Notice This guide is delivered subject to the f ... nge X73 Parameters This section refers to the programming options of the two-way magnetic contact **RWX73M** and RWX73F. NOTE: After programming X73 parameters and exiting Programming mode, press the T...
lang:en score:29 filesize: 4.73 M page_count: 180 document date: 2019-09-22

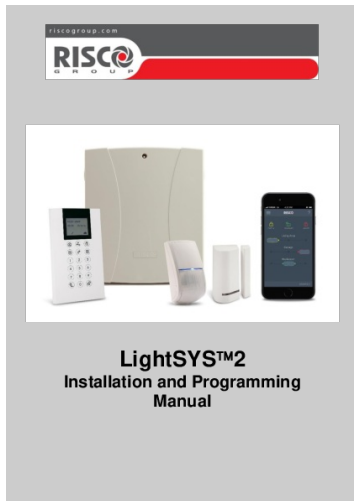

[\[pdf\]](#) User Manual Guide Accessories

5IN2048 K LightSYS2 Installer Manual EN WEB Janex International This guide contains proprietary information belonging to RISCO Group Such is supplied solely for the purpose of assisting explicitly and properly 2024r janexint pl files Materiały Techniczne Programy Instrukcje Portal SSWIN LightSYS ||| LightSYS2 Installation and Programming Manual Important Notice This guide is delivered subject to ... L 132KF1 WL T4RC RWT51P RWT52P RWT6SW RWT6F RWT6C08 RWT6G WL T312 WL X312 RWT95 RWT95P RWX95 RWX95P **RWX73M** RWX73F RWX73F8BL RWX73F8BR **RWX73M8BL** **RWX73M8BR** RWX75M RWX96 RWX96P RWT78M RWX515DT RWX515DTP ...

lang:en score:27 filesize: 5.51 M page_count: 274 document date: 2021-09-13




[\[pdf\]](#) User Manual Guide

5IN2772 C WiComm Pro Installation Manual EN WEB Jan 29 2023 — This guide is delivered subject to the following conditions and of illustration reference only Quick Device Allocation at Main Panel 157 pages D lsc au Documents |||

WiComm Pro Model: RW332M Installation Manual Important Notice This guide is delivered subject to t ... te. X73 Parameters This section refers to the programming options of the two-way magnetic contact **RWX73M** and RWX73F. The programming options RWX73 M Parameters The **RWX73M** is a 2-way supervised tra...

lang:en score:27 filesize: 3.04 M page_count: 157 document date: 2022-07-25

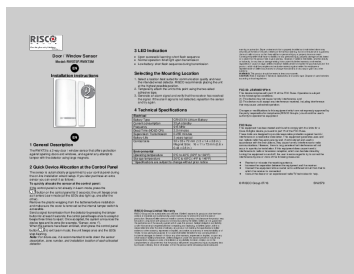

[\[pdf\]](#) User Manual Instructions

Microsoft Word 5IN2579 MagneticContact Motti B User manual Risco Ltd RWX73F915 2Way Multi Function Contacts 915 2 Way Door Window JE4RWX73F915 rwx73f915

Door / Window Sensor Model: RWX73F/**RWX73M** EN Installation instructions EN 1 General Description The RWX73 is a 2-way door / window sensor that offers protection against opening doors and windows, and against any attempt to tamper with the detector using large magnets. 2 Quick Device Allocation at ...

lang:en score:25 filesize: 150.25 K page_count: 2 document date: 2016-07-11



[\[pdf\]](#) User Manual Accessories

LightSYS Installation and Programming Manual RISCO Group Manuale Box in policarbonato per centrali Risco con alimentatore Segshop RP432M0000E iotivedo it cartella FILE |||

Manuale di Installazione e Programmazione LightSYS 2 Avviso Importante Questa guida viene fornita ... SA 900 mSEC MEDIA 675 mSEC ALTA 450 mSEC MASSIMA 225 mSEC Zone Radio: Trasmettitori per Contatti **RWX73M** / F Tasti Rapidi Parametro Default Range ZZ N. di Serie L identificativo a 11 cifre ri...

lang:it **score:23** filesize: 6.56 M page_count: 324 document date: 2016-10-25




[\[pdf\]](#) Datasheet

Datasheet RWX73M86800 RWX73M86800C EL by RISCO 381018 true securimport web content |||

Contacto Magntico Bidireccional inalmblico El Contacto Magntico de Puerta/Ventana Inalmbrico Bidireccional **RWX73M** de RISCO es un transmisor supervisado ideal para la proteccin inalmbrica de puertas/ventanas en aplicaciones residenciales y en pequenos negocios. El transmisor tiene un contacto magntico...

lang:es **score:23** filesize: 117.09 K page_count: 1 document date: 2018-01-10

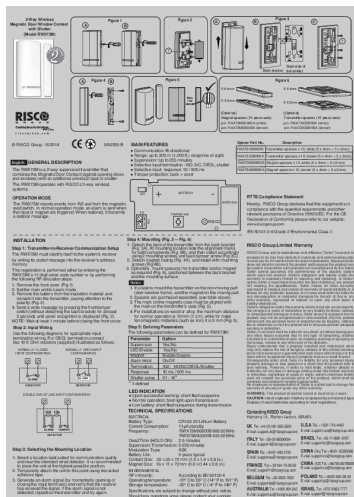

[\[pdf\]](#) Specifications Warranty


MAIN FEATURES INSTALLATION TECHNICAL SPECIFICATIONS LED INDICATION RISCO Group

Limited Warranty Contacting GENERAL D RWX73M86800B fa3df461b1 nxcli net cartella FILE |||

2-Way Wireless Magnetic Door/Window Contact A with Shutter Model **RWX73M**

Figure 1 B Figure 2 A T Figure 3 B C T A Figure 4 B Figure 5 Max. 1cm 5 X 4mm Back side of Back bracket transmitter Figure 6 5 X 4mm 5 X 2mm Optional Magnet spacers 10-piece sets : p/n: RAX73MS0000A white ...

lang:en **score:22** filesize: 628.75 K page_count: 2 document date: 2014-10-26

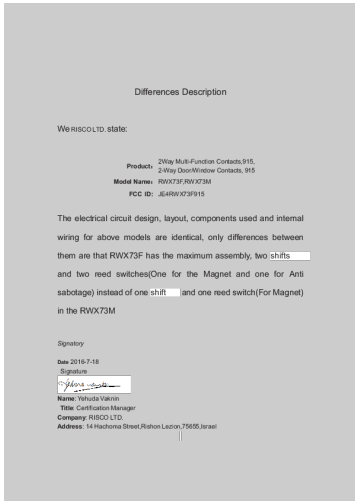

[pdf]

Differences Description simple Cover letter Risco Ltd RWX73F915 2Way Multi Function Contacts 915 2 Way Door Window JE4RWX73F915 rwx73f915

Differences Description We RISCO LTD. state: 2Way Multi-Function Contacts,915, Product 2-Way Door/Window Contacts, 915 Model Name RWX73F,**RWX73M** FCC ID: JE4RWX73F915 The electrical circuit design, layout, components used and internal wiring for above models are identical, only differences between the...

lang:it score:20 filesize: 24.16 K page_count: 1 document date: 2016-07-22




[pdf]

User Manual Guide Accessories

Microsoft Word 5IN2861 G Agility 4 IM EN SOURCE Ronnie Solomon Installer Guide Glaskrossdetektor trådlös 2 3 och Wicomm Pro WEB drive google file d 1jg3oR5Au b4DKAJAAbpYnR2eNXrUTW2N view usp share link |||

Agility 4 Installer Manual Model: RW132V Important Notice This guide is delivered subject to the f ... nge X73 Parameters This section refers to the programming options of the two-way magnetic contact **RWX73M** and RWX73F. NOTE: After programming X73 parameters and exiting Programming mode, press the T...

lang:en score:19 filesize: 5.24 M page_count: 183 document date: 2022-04-04

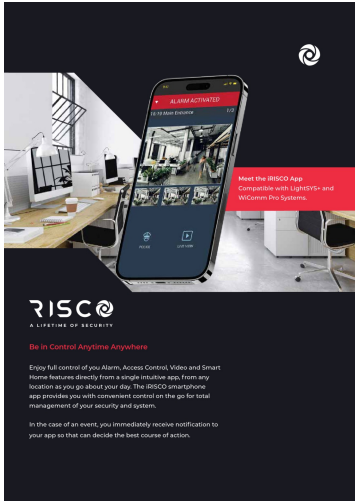

[pdf]

Catalog

Be in Control Anytime Anywhere 2023 RISCO Trifold 208 210 LR Iscnzdev merce vision Documents SupplierCatalogues |||

Meet the iRISCO App Compatible with LightSYS and WiComm Pro Systems. Be in Control Anytime Anywhere ... ess perimeter door/ window protection. Easy to install using a simple bracket to wall installation. **RWX73M** Wireless Piccolo PIR/Pet A small and stylish motion detector for residential use. The innova...

lang:en score:19 filesize: 721.92 K page_count: 6 document date: 2023-08-27




[\[pdf\]](#) Borchure

Detector s Brochure Final G I Security S A RWX73M 2 Way Door Window contact RWX73F Multi function iWISE Wired RK815DTG3 DTAM Grade 3 15m 50 RK825DTG3 25m 82 c0bdbb61 f2a0 45a6 9fa8 dbc77ea84204 cdn gisecurity gr files |||

Professional Detectors Line www.riscogroup.com Detection Technologies K-Band Microwave Better cat ... ckTeC ShockTec Plus Magnet Vitron Plus RG71FM0G3 ViTRON Plus Glassbreak WL Door/Window contact **RWX73M** RWX73F 2-Way Door/Window contact 2-Way Multi-function contact Slim Door/Window Contact RWX7...

lang:en score:18 filesize: 22.5 M page_count: 24 document date: 2024-03-19

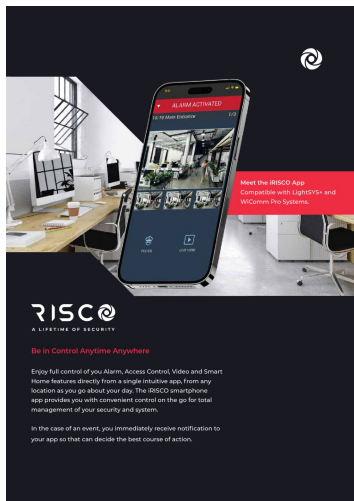

[\[pdf\]](#) Catalog

Supplier Catalogues LSC Complete Security Solutions Supplies2023 RISCO Trifold 208 210 LRisc au Documents SupplierCatalogues 2023 LR |||

Meet the iRISCO App Compatible with LightSYS and WiComm Pro Systems. Be in Control Anytime Anywhere ... ess perimeter door/ window protection. Easy to install using a simple bracket to wall installation. **RWX73M** Wireless Piccolo PIR/Pet A small and stylish motion detector for residential use. The innova...

lang:en score:18 filesize: 721.92 K page_count: 6 document date: 2023-08-27



[\[pdf\]](#) Catalog

RISCO Professional Detectors Line Catalog SP LR RK350DT0000B 605870 true securimport web content |||

Familia de Detectores Profesionales TECNOLOGAS DE DETECCIN Microondas de banda-K Rendimiento supe ... tal RK601SMG3 con contacto magntico Vitron Plus RG71FM0G3 Rotura de Cristales Contacto magntico **RWX73M** Contacto magntico bidireccional Grado 2 RWX73F Contacto magntico multifuncin bidireccional Gr...

lang:es score:18 filesize: 3.36 M page_count: 20 document date: 2018-09-12




[\[pdf\]](#) User Manual Guide Accessories

Installer Manual agility 3 im en 5in1869 b absolon cz deploy files |||

Installer Manual Agility 3 Installer Manual Important Notice This guide is delivered subject to th ... nge X73 Parameters This section refers to the programming options of the two-way magnetic contact **RWX73M** and RWX73F. NOTE: After programming X73 parameters and exiting Programming mode, press the T...

lang:en **score:18** filesize: 7.03 M page_count: 176 document date: 2014-08-27

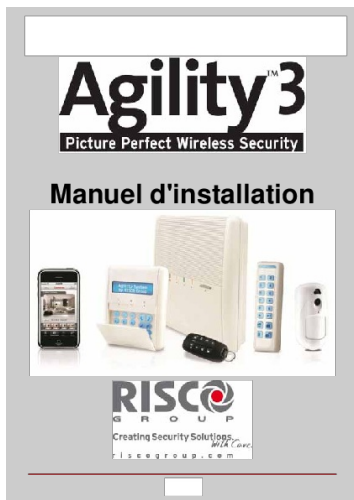

[\[pdf\]](#) User Manual Guide

untitled TÃ©lÃ©charger Module Plug in de communication GSM GPRS 2G RW132G2000A RISCO Agility 3 Full Installation Manual FR WEB dixys pro WebRoot LaPoste Shops box1725 4B30 98D3 E2CE 119D FDCC 0A0A 33E8 24BC |||

Agility Manuel d'installation Manuel d'installation Page 1 Agility Manuel d'installation Notice impo ... s X73 Cette section porte sur les options de programmation des contacts magnétiques bidirectionnels **RWX73M** et RWX73F. Les options de programmation sont: Paramètres RWX73 M Le **RWX73M** est un metteur bi...

lang:fr **score:17** filesize: 1.65 M page_count: 168 document date: 2013-09-08



[\[pdf\]](#)

Télécharger la fiche produit RISCO AGILITY4 4G IRP NF1 Système d'alarme sans fil Villatech

1000121186 villatech fr media |||

riscogroup.com/france AgilityTM4 Scurit Multi-Dimensionnelle RISCO Group présente l'AgilityTM 4, u ... protection primtrique des portes / fenêtres. Facile installer en utilisant son support de fixation. **RWX73M** Contact magnétique SF Bidirectionnel RWX73F Contact multifonction SF Bidirectionnel Dtecte...

lang:fr **score:17** filesize: 2.09 M page_count: 6 document date: 2022-07-11



[pdf]

RISCO Botón de Pánico Panda Inalámbrico Blanco RWX332KF Cyberpuerta mx 61041d9c0e72c4

05864164 cdn cyberpuerta storage articles multimedia 610 41d 9c0 |||

riscogroup.es AgilityTM4 Seguridad multidimensional RISCO Group se complace en presentar AgilityTM ... teccin inalmbtrica de puertas/ventanas. Fcil de instalar al disponer de un prtctico soporte de pared. **RWX73M** Contacto magntico inalmbtrico bidireccional RWX73F Contacto magntico multifuncin inalmbtric...

lang:es score:17 filesize: 2.09 M page_count: 6 document date: 2018-11-27



[pdf] Catalog

Professional Detectors Line RISCO Group WIRED WIRELESS Beyond Wired DT K Band Microwave for unparalleled catch performance Unique detection technologies such as Active IR anti mask Sway Recognition™ and Digital Catalog EN LR 0 riscogroup sites default files |||

Professional Detectors Line DETECTION TECHNOLOGIES K-Band Microwave Better catch performance and ... h Contact With Contact Grade 3 Vitron Plus RG71FM0G3 Glass Break Grade 3 WL Door/Window contact **RWX73M** 2-Way Door/Window contact RWX73F 2-Way Multi-function contact Wireless Curtain RWX106 P...

lang:en score:17 filesize: 3.36 M page_count: 20 document date: 2018-09-02



[pdf] Catalog

Professionele detectoren serie Security Systems Een unieke PIR verwerkingstechnologie voor huisdiervriendelijke Onderscheidt indringers van huisdieren en meet de kruissnelheid het doel RISCO

Professional Detectors Line Catalog NL docs srsltid AfmBOopOqer V6gyzvCLZa7xJH

OE6ESey1iAJ3fhAA7ThsXgvF8qMV1 security systems nl |||

Professionele detectoren serie DETECTIE TECHNOLOGIEN K-band Radar

Ongevenaarde detectieprestaties ... contact met contact graad 3 Vitron Plus

RG71FM0G3 glasbreuk graad 3 Draadloze deur/raam contact **RWX73M** 2-weg

deur/raam contact RWX73F 2-weg multifunctioneel contact Draadloze gordijndetector

...

lang:nl score:17 filesize: 3.33 M page_count: 20 document date: 2018-10-15



[pdf]

Télécharger la fiche produit RISCO RM 132 A 8 D 5 0 E Système d alarme sans fil Villatech 1000103859

villatech fr media |||

riscogroup.com/france AgilityTM4 Scurit Multi-Dimensionnelle RISCO Group présente l

AgilityTM 4, u ... protection primtrique des portes / fentres. Facile installer en utilisant

son support de fixation. **RWX73M** Contact magnétique SF Bidirectionnel RWX73F

Contact multifonction SF Bidirectionnel Dtecte...

lang:fr score:17 filesize: 2.11 M page_count: 6 document date: 2018-11-14



[pdf] Accessories

Manuale di Installazione e Programmazione LightSYS 2 RISCO Cloud è un applicazione server

proprietaria che fornisce agli utenti Sirene BUS ProSound Lumin8 4 Page 53 Pagina dei

RP432P000EUC gam service it images |||

Manuale di Installazione e Programmazione LightSYS 2 Avviso Importante Questa

guida viene fornit ... X95 , WatchOUT RWX312 e Barriera Radio RWX74 153

Zone Radio: Trasmettitori per Contatti **RWX73M** / F 153

154 Programmi Di Test 154

lang:it score:16 filesize: 9.8 M page_count: 324 document date: 2013-10-28



[\[pdf\]](#) User Manual Guide

Microsoft Word 5IN2045 H Agility4 Full Installation Manual FR SOURCE Ronnie Solomon Manuel d installation espace domotique fr upload |||

Agility 4 Manuel d installation Modle : RW132V Note importante Ce guide est offert mais reste suje ... imite Cette section porte sur les options de programmation des contacts magntiques bidirectionnels **RWX73M** et RWX73F. Les options de programmation sont: Dclencheur Camera Permet une camra IRP de s...

lang:fr **score:16** filesize: 3.51 M page_count: 188 document date: 2020-01-16




[\[pdf\]](#)

WiComm Pro La Última Generación de Seguridad Inteligente RISCO Group se complace en presentar un sistema seguridad inteligente inalámbrico múltiples capas modular y adaptable DS WicommPro 1 db6d casmarglobal media akeneo connector files D S |||

WiComm Pro La ltima Generacin de Seguridad Inteligente riscogroup.es RISCO Group se complace en pr ... teccin inalmbtrica de puertas/ventanas. Fcil de instalar al disponer de un prtico soporte de pared. **RWX73M** Contacto magntico inalmbrico bidireccional RWX73F Contacto magntico multifuncin inalmbtric...

lang:es **score:16** filesize: 5.2 M page_count: 6 document date: 2020-02-19

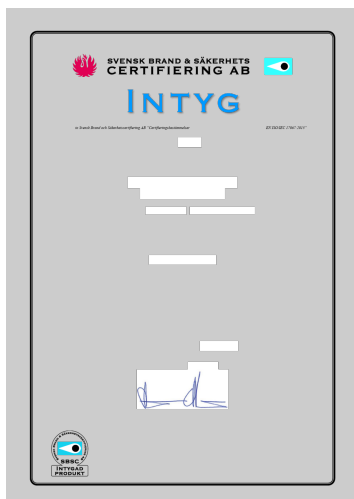

[\[pdf\]](#)

15 183 RWX73x riscogroup sites default files |||

According to Svensk Brand och Skerhetscertifiering AB Certifieringsbestmmelser - Certifiering av produkter i system 1b enligt SS-EN ISO/IEC 17067:2013 No. 15-183 Svensk Brand- och Skerhetscertifiering AB certifies that the: Magnetic contact - wireless RWX73F, **RWX73M** fulfils the requirements in Ala...

lang:no **score:16** filesize: 205.55 K page_count: 2 document date: 2015-05-04



[pdf]

2014 RWX73M RISCO 0 riscogroup sites default files |||

...

lang:no score:16 filesize: 1.16 M page_count: 2 document date: 2014-08-13



[pdf] User Manual Installation Guide Guide Accessories

Microsoft Word 5IN2048 G LightSYS2 Installer Manual EN SOURCE Ronnie Solomon LightSYS™2

Installation and Programming LSC Connecting the system to RISCO Cloud enables users benefit from smartphone app smart easy control of their Chapter 5 Using Non Menus From menu select ⑦①②⑤


Install Bus Device WL Expander Isc au Documents

LightSYS2 Installation and Programming Manual Important Notice This guide is delivered subject to ... L 132KF1 WL T4RC RWT51P RWT52P RWT6SW RWT6F RWT6C08 RWT6G WL T312 WL X312 RWT95 RWT95P RWX95 RWX95P **RWX73M** RWX73F RWX73F8BL RWX73F8BR **RWX73M8BL** **RWX73M8BR** RWX75M RWX96 RWX96P RWT78M RWX515DT RWX515DTP ...

lang:en score:14 filesize: 8.71 M page_count: 272 document date: 2020-07-24

[pdf] Accessories Catalog

Max Gadot Product Catalogue 2020 C R Kennedy NZVUpoint P2P supplies live video clips for verification in response to any event or trigger determine if an alarm is real falseCRK Risco Cataloguecrkennedy co nz ts1719399785 attachments BlogPost 36 CRK NZProduct falseLightSYS™2 RISCO Group s professional and versatile hybrid security system seamlessly integrates the popular VUpoint Smart Home offering CRK CatalogueCRK ts1754974423 ts1758882224 ||| ||| RISCO ALARM SYSTEMS Product Catalogue 2020 riscogroup.com LightSYSTM2 Live Video Security Solution Endless Possibilities, One Security Solution Now With Live Video Verification Now with 3G LightSYSTM2 RISCO Group s professional and versatil ||| RISCO ALARM SYSTEMS Product Catalogue 2020 riscogroup.com LightSYSTM2 Live Video Security Solution Endless Possibilities, One Security Solution Now With Live Video Verification Now with 3G LightSYSTM2 RISCO Group s professional and versatil RISCO ALARM SYSTEMS Product Catalogue 2020 riscogroup.com LightSYSTM2 Live Video Security Solution ... less perimeter door/window protection. Easy to install using a simple bracket to wall installation. **RWX73M** 2Way Door/Window Contact RWX73F 2Way Multi-Function Contact Wireless Curtain PIR Detector... lang:en score:14 filesize: 6.2 M page_count: 35 document date: 2020-08-06

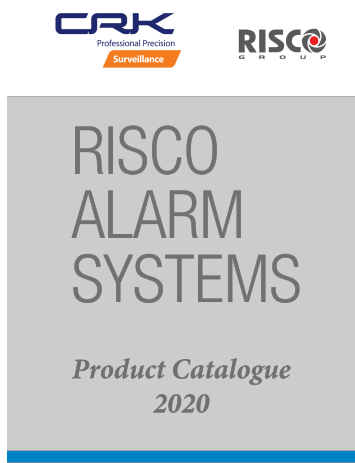

RISCO ALARM SYSTEMS

Product Catalogue
2020

[\[pdf\]](#) Accessories Catalog

Max Gadot CRK Risco Catalogue crkennedy co nz ts1600125676 attachments BlogPost 36

RISCO ALARM SYSTEMS Product Catalogue 2020 riscogroup.com LightSYSTEM2 Live Video Security Solution ... less perimeter door/window protection. Easy to install using a simple bracket to wall installation. **RWX73M** 2Way Door/Window Contact RWX73F 2Way Multi-Function Contact Wireless Curtain PIR Detector...
lang:en **score:14** filesize: 6.2 M page_count: 35 document date: 2020-08-06

RISCO riscogroup.com

We, the undersigned,
RISCO LTD.
Rishon LeZion, Hachoma St. 14
ISRAEL
PHONE: (072) 3637777
FAX: (072) 3616888

Declare that the DUC is issued under our sole responsibility and belongs to the following product(s):

RISCO Part No.	Product description	Approved model Product
RWT720800E	WL Door/Window Contact, 868MHz	RWT72X
RWT720800E	WL Pulse Count Transmitter, 868	RWT72X
RWT720800E	WL Dual Channel Transmitter, 868	RWT72X
RWX73M86800C	2Way Door/Window Contacts, 868	RWX73M
RWX73M86800C	2Way Door/Window Contact, 868, Black	RWX73M
RWX73F86800C	2Way Multi-Function Contacts, 868	RWX73F
RWX73F86800C	2Way Multi-Function Contact, 868, Black	RWX73F

And also in conformity with the essential requirements and other relevant requirements of the following Directives and harmonized standards:

Standard	Revision	Article
EN 60958-2:2011/1:2017	201404EU	4.1.1.1
EN 60958-2:2011/1:2017	201404EU	4.1.1.2
EN 60958-2:2011/1:2017	201404EU	4.1.1.3
EN 60958-2:2011/1:2017	201404EU	4.1.1.4
EN 60958-2:2011/1:2017	201404EU	4.1.1.5
EN 60958-2:2011/1:2017	201404EU	4.1.1.6
EN 60958-2:2011/1:2017	201404EU	4.1.1.7
EN 60958-2:2011/1:2017	201404EU	4.1.1.8
EN 60958-2:2011/1:2017	201404EU	4.1.1.9
EN 60958-2:2011/1:2017	201404EU	4.1.1.10
EN 60958-2:2011/1:2017	201404EU	4.1.1.11
EN 60958-2:2011/1:2017	201404EU	4.1.1.12
EN 60958-2:2011/1:2017	201404EU	4.1.1.13
EN 60958-2:2011/1:2017	201404EU	4.1.1.14
EN 60958-2:2011/1:2017	201404EU	4.1.1.15
EN 60958-2:2011/1:2017	201404EU	4.1.1.16
EN 60958-2:2011/1:2017	201404EU	4.1.1.17
EN 60958-2:2011/1:2017	201404EU	4.1.1.18
EN 60958-2:2011/1:2017	201404EU	4.1.1.19
EN 60958-2:2011/1:2017	201404EU	4.1.1.20
EN 60958-2:2011/1:2017	201404EU	4.1.1.21
EN 60958-2:2011/1:2017	201404EU	4.1.1.22
EN 60958-2:2011/1:2017	201404EU	4.1.1.23
EN 60958-2:2011/1:2017	201404EU	4.1.1.24
EN 60958-2:2011/1:2017	201404EU	4.1.1.25
EN 60958-2:2011/1:2017	201404EU	4.1.1.26
EN 60958-2:2011/1:2017	201404EU	4.1.1.27
EN 60958-2:2011/1:2017	201404EU	4.1.1.28
EN 60958-2:2011/1:2017	201404EU	4.1.1.29
EN 60958-2:2011/1:2017	201404EU	4.1.1.30
EN 60958-2:2011/1:2017	201404EU	4.1.1.31
EN 60958-2:2011/1:2017	201404EU	4.1.1.32
EN 60958-2:2011/1:2017	201404EU	4.1.1.33
EN 60958-2:2011/1:2017	201404EU	4.1.1.34
EN 60958-2:2011/1:2017	201404EU	4.1.1.35
EN 60958-2:2011/1:2017	201404EU	4.1.1.36
EN 60958-2:2011/1:2017	201404EU	4.1.1.37
EN 60958-2:2011/1:2017	201404EU	4.1.1.38
EN 60958-2:2011/1:2017	201404EU	4.1.1.39
EN 60958-2:2011/1:2017	201404EU	4.1.1.40
EN 60958-2:2011/1:2017	201404EU	4.1.1.41
EN 60958-2:2011/1:2017	201404EU	4.1.1.42
EN 60958-2:2011/1:2017	201404EU	4.1.1.43
EN 60958-2:2011/1:2017	201404EU	4.1.1.44
EN 60958-2:2011/1:2017	201404EU	4.1.1.45
EN 60958-2:2011/1:2017	201404EU	4.1.1.46
EN 60958-2:2011/1:2017	201404EU	4.1.1.47
EN 60958-2:2011/1:2017	201404EU	4.1.1.48
EN 60958-2:2011/1:2017	201404EU	4.1.1.49
EN 60958-2:2011/1:2017	201404EU	4.1.1.50
EN 60958-2:2011/1:2017	201404EU	4.1.1.51
EN 60958-2:2011/1:2017	201404EU	4.1.1.52
EN 60958-2:2011/1:2017	201404EU	4.1.1.53
EN 60958-2:2011/1:2017	201404EU	4.1.1.54
EN 60958-2:2011/1:2017	201404EU	4.1.1.55
EN 60958-2:2011/1:2017	201404EU	4.1.1.56
EN 60958-2:2011/1:2017	201404EU	4.1.1.57
EN 60958-2:2011/1:2017	201404EU	4.1.1.58
EN 60958-2:2011/1:2017	201404EU	4.1.1.59
EN 60958-2:2011/1:2017	201404EU	4.1.1.60
EN 60958-2:2011/1:2017	201404EU	4.1.1.61
EN 60958-2:2011/1:2017	201404EU	4.1.1.62
EN 60958-2:2011/1:2017	201404EU	4.1.1.63
EN 60958-2:2011/1:2017	201404EU	4.1.1.64
EN 60958-2:2011/1:2017	201404EU	4.1.1.65
EN 60958-2:2011/1:2017	201404EU	4.1.1.66
EN 60958-2:2011/1:2017	201404EU	4.1.1.67
EN 60958-2:2011/1:2017	201404EU	4.1.1.68
EN 60958-2:2011/1:2017	201404EU	4.1.1.69
EN 60958-2:2011/1:2017	201404EU	4.1.1.70
EN 60958-2:2011/1:2017	201404EU	4.1.1.71
EN 60958-2:2011/1:2017	201404EU	4.1.1.72
EN 60958-2:2011/1:2017	201404EU	4.1.1.73
EN 60958-2:2011/1:2017	201404EU	4.1.1.74
EN 60958-2:2011/1:2017	201404EU	4.1.1.75
EN 60958-2:2011/1:2017	201404EU	4.1.1.76
EN 60958-2:2011/1:2017	201404EU	4.1.1.77
EN 60958-2:2011/1:2017	201404EU	4.1.1.78
EN 60958-2:2011/1:2017	201404EU	4.1.1.79
EN 60958-2:2011/1:2017	201404EU	4.1.1.80
EN 60958-2:2011/1:2017	201404EU	4.1.1.81
EN 60958-2:2011/1:2017	201404EU	4.1.1.82
EN 60958-2:2011/1:2017	201404EU	4.1.1.83
EN 60958-2:2011/1:2017	201404EU	4.1.1.84
EN 60958-2:2011/1:2017	201404EU	4.1.1.85
EN 60958-2:2011/1:2017	201404EU	4.1.1.86
EN 60958-2:2011/1:2017	201404EU	4.1.1.87
EN 60958-2:2011/1:2017	201404EU	4.1.1.88
EN 60958-2:2011/1:2017	201404EU	4.1.1.89
EN 60958-2:2011/1:2017	201404EU	4.1.1.90
EN 60958-2:2011/1:2017	201404EU	4.1.1.91
EN 60958-2:2011/1:2017	201404EU	4.1.1.92
EN 60958-2:2011/1:2017	201404EU	4.1.1.93
EN 60958-2:2011/1:2017	201404EU	4.1.1.94
EN 60958-2:2011/1:2017	201404EU	4.1.1.95
EN 60958-2:2011/1:2017	201404EU	4.1.1.96
EN 60958-2:2011/1:2017	201404EU	4.1.1.97
EN 60958-2:2011/1:2017	201404EU	4.1.1.98
EN 60958-2:2011/1:2017	201404EU	4.1.1.99
EN 60958-2:2011/1:2017	201404EU	4.1.1.100

The technical documentation as required by the Conformity Assessment procedure is kept by Risco Ltd., at the following address:

Risco Ltd. Rishon LeZion, Hachoma St. 14, Israel

[\[pdf\]](#) Declaration of Conformity

EC Declaration of Conformity user en DoC WL Door Contact rev04 riscogroup sites default files certifications |||

EU Declaration of Conformity We, the undersigned, RISCO LTD. Rishon LeZion, Hachoma St. 14 ISRAEL PH ... E WL Pulse Count Transmitter, 868 WLT72P RWT72X86800E WL Dual Channel Transmitter, 868 RWT72X **RWX73M**86800C 2Way Door/Window Contacts, 868 **RWX73M** **RWX73M**8BL00C 2Way Door/Win Contact, 868,Black...

lang:en **score:14** filesize: 116.17 K page_count: 2 document date: 2020-12-16

RISCO riscogroup.com

We, the undersigned,
RISCO LTD.
Rishon LeZion, Hachoma St. 14
ISRAEL
PHONE: (072) 3637777
FAX: (072) 3616888

Declare that the DUC is issued under our sole responsibility and belongs to the following product(s):

RISCO Part No.	Product description	Approved model Product
RWT720800E	WL Door/Window Contact, 868MHz	RWT72X
RWT720800E	WL Pulse Count Transmitter, 868	WLT72P
RWT720800E	WL Dual Channel Transmitter, 868	RWT72X
RWX73M86800C	2Way Door/Window Contacts, 868	RWX73M
RWX73M86800C	2Way Door/Window Contact, 868, Black	RWX73M
RWX73F86800C	2Way Multi-Function Contacts, 868	RWX73F
RWX73F86800C	2Way Multi-Function Contact, 868, Black	RWX73F

And also in conformity with the essential requirements and other relevant requirements of the following Directives and harmonized standards:

Standard	Revision	Article
EN 60958-2:2011/1:2017	201404EU	4.1.1.1
EN 60958-2:2011/1:2017	201404EU	4.1.1.2
EN 60958-2:2011/1:2017	201404EU	4.1.1.3
EN 60958-2:2011/1:2017	201404EU	4.1.1.4
EN 60958-2:2011/1:2017	201404EU	4.1.1.5
EN 60958-2:2011/1:2017	201404EU	4.1.1.6
EN 60958-2:2011/1:2017	201404EU	4.1.1.7
EN 60958-2:2011/1:2017	201404EU	4.1.1.8
EN 60958-2:2011/1:2017	201404EU	4.1.1.9
EN 60958-2:2011/1:2017	201404EU	4.1.1.10
EN 60958-2:2011/1:2017	201404EU	4.1.1.11
EN 60958-2:2011/1:2017	201404EU	4.1.1.12
EN 60958-2:2011/1:2017	201404EU	4.1.1.13
EN 60958-2:2011/1:2017	201404EU	4.1.1.14
EN 60958-2:2011/1:2017	201404EU	4.1.1.15
EN 60958-2:2011/1:2017	201404EU	4.1.1.16
EN 60958-2:2011/1:2017	201404EU	4.1.1.17
EN 60958-2:2011/1:2017	201404EU	4.1.1.18
EN 60958-2:2011/1:2017	201404EU	4.1.1.19
EN 60958-2:2011/1:2017	201404EU	4.1.1.20
EN 60958-2:2011/1:2017	201404EU	4.1.1.21
EN 60958-2:2011/1:2017	201404EU	4.1.1.22
EN 60958-2:2011/1:2017	201404EU	4.1.1.23
EN 60958-2:2011/1:2017	201404EU	4.1.1.24
EN 60958-2:2011/1:2017	201404EU	4.1.1.25
EN 60958-2:2011/1:2017	201404EU	4.1.1.26
EN 60958-2:2011/1:2017	201404EU	4.1.1.27
EN 60958-2:2011/1:2017	201404EU	4.1.1.28
EN 60958-2:2011/1:2017	201404EU	4.1.1.29
EN 60958-2:2011/1:2017	201404EU	4.1.1.30
EN 60958-2:2011/1:2017	201404EU	4.1.1.31
EN 60958-2:2011/1:2017	201404EU	4.1.1.32
EN 60958-2:2011/1:2017	201404EU	4.1.1.33
EN 60958-2:2011/1:2017	201404EU	4.1.1.34
EN 60958-2:2011/1:2017	201404EU	4.1.1.35
EN 60958-2:2011/1:2017	201404EU	4.1.1.36
EN 60958-2:2011/1:2017	201404EU	4.1.1.37
EN 60958-2:2011/1:2017	201404EU	4.1.1.38
EN 60958-2:2011/1:2017	201404EU	4.1.1.39
EN 60958-2:2011/1:2017	201404EU	4.1.1.40
EN 60958-2:2011/1:2017	201404EU	4.1.1.41
EN 60958-2:2011/1:2017	201404EU	4.1.1.42
EN 60958-2:2011/1:2017	201404EU	4.1.1.43
EN 60958-2:2011/1:2017	201404EU	4.1.1.44
EN 60958-2:2011/1:2017	201404EU	4.1.1.45
EN 60958-2:2011/1:2017	201404EU	4.1.1.46
EN 60958-2:2011/1:2017	201404EU	4.1.1.47
EN 60958-2:2011/1:2017	201404EU	4.1.1.48
EN 60958-2:2011/1:2017	201404EU	4.1.1.49
EN 60958-2:2011/1:2017	201404EU	4.1.1.50
EN 60958-2:2011/1:2017	201404EU	4.1.1.51
EN 60958-2:2011/1:2017	201404EU	4.1.1.52
EN 60958-2:2011/1:2017	201404EU	4.1.1.53
EN 60958-2:2011/1:2017	201404EU	4.1.1.54
EN 60958-2:2011/1:2017	201404EU	4.1.1.55
EN 60958-2:2011/1:2017	201404EU	4.1.1.56
EN 60958-2:2011/1:2017	201404EU	4.1.1.57
EN 60958-2:2011/1:2017	201404EU	4.1.1.58
EN 60958-2:2011/1:2017	201404EU	4.1.1.59
EN 60958-2:2011/1:2017	201404EU	4.1.1.60
EN 60958-2:2011/1:2017	201404EU	4.1.1.61
EN 60958-2:2011/1:2017	201404EU	4.1.1.62
EN 60958-2:2011/1:2017	201404EU	4.1.1.63
EN 60958-2:2011/1:2017	201404EU	4.1.1.64
EN 60958-2:2011/1:2017	201404EU	4.1.1.65
EN 60958-2:2011/1:2017	201404EU	4.1.1.66
EN 60958-2:2011/1:2017	201404EU	4.1.1.67
EN 60958-2:2011/1:2017	201404EU</	



[\[pdf\]](#) Declaration of Conformity

Motti Barad UKCA Declaration of Conformity DoC WL Door Contact rev01 riscogroup sites default files certifications |||

UKCA Declaration of Conformity Prodcut: RISCO Part No. RWT72M86800F Product description WL Door/Window Contact, 868MHz Apparatus model/ Product RWT72M **RWX73M**86800D 2Way Door/Window Contacts, 868 **RWX73M** RWX73F86800C 2Way Multi-Function Contacts,868 RWX73F RWX73F8BR00C 2-Way Multi Contact,... lang:en score:14 filesize: 74.84 K page_count: 2 document date: 2021-10-06



[\[pdf\]](#) Catalog

Risco LatAm catalogue 2014 LR for web riscogroup latin america system files |||

riscogroup.com/latin-america CATLOGO 2014/15 Creating Security Solutions, With Care Contenido Pre ... RWT72I Contacto magntico inalmbriico, Alta Seguridad RA71BR Carcasa marn para Contacto Magntico **RWX73M** Contacto Magntico inalmbriico bidireccional RWX73F Contacto Magntico Multifuncin inalmbriico... lang:es score:14 filesize: 5.91 M page_count: 34 document date: 2014-05-01



[\[pdf\]](#) Installation Guide Safety Datasheet Accessories Catalog

Creating Security Solutions With CarePowered by RISCO s unique detection technologies these elegant and easy to install detectors are ideal for commercial institutional high end

residential Catalogus20142015security systems nl Catalogus20142015 srsltid

AfmBOoQOqVitiNRsbe09LtHKsGfKMOYECKX4yEH9dEYYJOMLEjOiyiaz9 CareCreating

residential RISCO Group designs manufactures markets solutions the full gamut of security installations from wired wireless hybrid intrusion security

AfmBOoQOqVitiNRsbe09LtHKsGfKMOYECKX4yEH9dEYYJOMLEjOiyiaz9security

AfmBOOrMdceVTws41NF TkVakJTGrTjyiw7daU9aSHGhoUyN 17LIGsD intrusion LightSYS™ 2 supports

two way Bus in any combination RW132V Agility™ 3 main unit RW132P Kitsecurity 17LIGsDsecurity

AfmBOoqHS5sJFiiz1zGiw XInyZHIITE1pnjd6KZCyEX quILTajqFib |||

riscogroup.com CATALOGUE 2014/15 Creating Security Solutions. With Care.

Contents Company Profile ... L Dual Channel Transmitter RWT72I WL Door/Window Cont, Hi-Sec RA71BR PLASTIC HOUSING T71 Brown **RWX73M** 2-Way Door/Window Contacts, RWX73F 2-Way Multi-Function Contacts WL Glassbreak RWT6G RWT6...

lang:en score:14 filesize: 8.05 M page_count: 34 document date: 2014-01-20



[pdf] Datasheet Accessories Catalog

CATALOGUE 2014 15 3 riscogroup 4 RISCO Group is a recognized leader in the global security solutions market Established 1978 as Rokonet manufacturer of high quality detectors RP296T4RC00B tag datasheet crkennedy co nz ts1595991962 attachments Product 33088 |||

riscogroup.com CATALOGUE 2014/15 Creating Security Solutions. With Care. Contents Company Profile ... L Dual Channel Transmitter RWT72I WL Door/Window Cont, Hi-Sec RA71BR PLASTIC HOUSING T71 Brown **RWX73M** 2-Way Door/Window Contacts, RWX73F 2-Way Multi-Function Contacts WL Glassbreak RWT6G RWT6...


lang:en score:14 filesize: 8.05 M page_count: 34 document date: 2014-01-20



5IN2404 G 2W WL Multi Contact RWX73F ML WEB 2 Way Wireless Function 1 Models RWX73F8BL RWX73F8BR RWX73FA ·RWX73FA8BR RWX73FA8BL SE CONTACTING RISCO GROUP ITALY Tel 39 02 66590054 E mail support it@riscogroup DS 4030 casmarglobal media akeneo connector files D S |||

2-Way Wireless MultiFunction Contact Models: RWX73F, RWX73F8BL, RWX73F8BR, RWX73FA, RWX73FA8BR RWX7 ... rat, val av kanal sker med DIP-omkopplare 1. Inlärningen kan utföras antingen genom att manuellt ange **RWX73Ms** 11-siffriga serienummer eller genom att utföra automatisk inlärning enligt följande steg: 1. Ta...

lang:it score:13 filesize: 695.35 K page_count: 16 document date: 2021-05-20

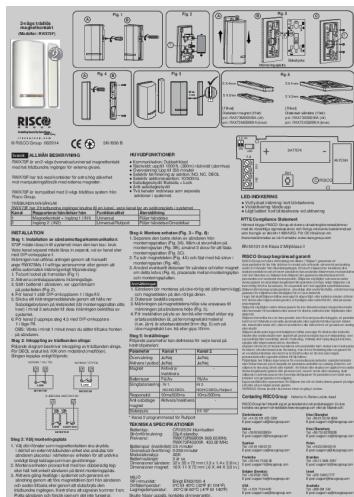

ALLMÄN BESKRIVNING INSTALLATION HUVUDFUNKTIONER TEKNISKA SPECIFIKATIONER LED INDIKERING 2 vägs trådlös magnetkontakt RISCO2 vägs Magnetkontakt med NONC plint RWX73M86800D Databladsecureus se 2024 07 Datablad |||

2-vägs trådlös magnetkontakt Modeller: RWX73F Fig. 1 A B A Fig. 4 B Fig. 2 T Fig. 5 Max. 1cm F ... rat, val av kanal sker med DIP-omkopplare 1. Inlärningen kan utföras antingen genom att manuellt ange **RWX73Ms** 11-siffriga serienummer eller genom att utföra automatisk inlärning enligt följande steg: 1. Ta...

lang:no score:13 filesize: 335.75 K page_count: 1 document date: 2014-06-01

