

# HYTRONIK Bluetooth Receiver Node – DALI Version Instruction Manual

[Home](#) » [HYTRONIK](#) » HYTRONIK Bluetooth Receiver Node – DALI Version Instruction Manual 



## HYTRONIK Bluetooth Receiver Node – DALI Version Instruction Manual



### Contents

- [1 Technical Specifications](#)
- [2 Download the App](#)
- [3 Dimming Interface Operation Notes](#)
- [4 Installation](#)
- [5 Additional Information / Documents](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)

## Technical Specifications

Product type	 <b>Bluetooth</b> DALI Digital Receiver Node (Flush mount)
Mains voltage	220~240VAC 50/60Hz
Rated load	Max.100mA, 50 devices
Stand-by power	<0.5W
Operation frequency	2.4 GHz – 2.483 GHz
Transmission power	4 dBm
Range (Typical)	10 ~ 30m
Protocol	 <b>Bluetooth</b> 5.0 SIG Mesh
Operation temperature	Ta: -20°C ~ +45°C
Case temperature Max.)	Tc: +75°C
Storage temperature	-20°C ~ +60°C
Max. relative humidity	20 ~ 90%
IP rating	IP20
Impulse withstand oltage	2.5KV
Duty type	S1
Insulation material	PTI material group IIIa
Glow wire	level 3, 850°C
Protection	Built-in protection provide
Insulation	Class II Pollution degree 2
EMC standard (EMC)	EN55015, EN61547, EN61000-3-2, EN61000-3-3
Safety standard (LVD)	IEC 61058-1, EN 61058-1, IEC 61058-1-2 EN 61058-1-2, AS/NZS 61058.1
Radio Equipment (RED)	EN300 328, EN301489-1, EN301489-17, EN62479

## Download the App

Free App for set-up and commissioning


 **Bluetooth 5.0 SIG mesh**



iOS 10.0 or later



Android 5.0 or later

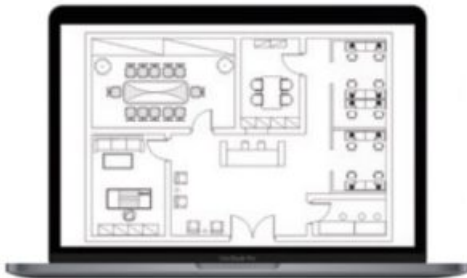

Web app/platform:

[iot.koolmesh.com](http://iot.koolmesh.com)

**Dimming Interface Operation Notes**

## Switch-Dim


The provided Switch-Dim interface allows for a simple dimming method using commercially available non-latching (momentary) wall switches. Detailed Push switch configurations can be set on Koolmesh app.

Switch Function	Action	Descriptions
Push switch	Short press (<1 second) Short press has to be longer than 0.1s, or it will be invalid.	– Turn on/off – Recall a scene – Turn on only – Exit manual mode – Turn off only – Do nothing
	Double push	– Turn on only – Exit manual mode – Turn off only – Do nothing – Recall a scene
	Long press ( $\geq 1$ second)	– Dimming – Colour tuning – Do nothing
Simulate sensor	/	– Upgrade a normal on/off motion sensor to a Bluetooth controlled motion sensor


## Installation

### Warnings:


1. Installation must be carried out by a qualified engineer in accordance with local regulations.
2. Disconnect power supply before installing.
3. Ensure environmental conditions are suitable for electronic equipment.

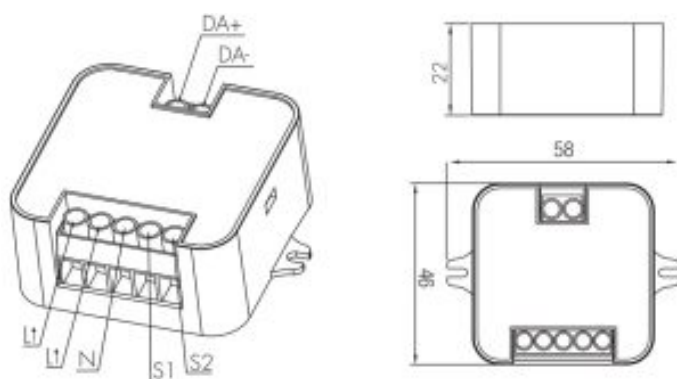

## Wire Preparation




## Wiring Diagram

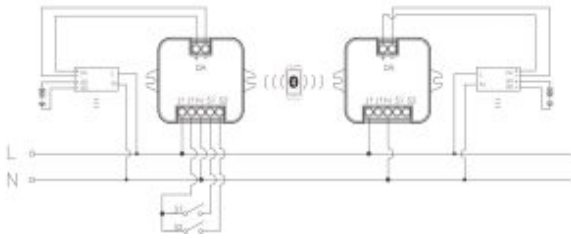

## Additional Information / Documents

1. To learn more about detailed product features/functions, please refer to [www.hytronik.com/download](http://www.hytronik.com/download) ->knowledge ->Introduction of App Scenes and Product Functions
2. Regarding precautions for Bluetooth product installation and operation, please kindly refer to [www.hytronik.com/download](http://www.hytronik.com/download) ->knowledge ->Bluetooth Products – Precautions for Product Installation and Operation
3. Data sheet is subject to change without notice. Please always refer to the most recent release on [www.hytronik.com/products/bluetooth](http://www.hytronik.com/products/bluetooth) technology ->Bluetooth Sensor ->Receiver Nodes
4. Regarding Hytronik standard guarantee policy, please refer to [www.hytronik.com/download](http://www.hytronik.com/download) ->knowledge ->Hytronik Standard Guarantee Policy.

## Documents / Resources

	<p><a href="#">HYTRONIK Bluetooth Receiver Node - DALI Version</a> [pdf] Instruction Manual HYTRONIK, Bluetooth, Receiver, Node, DALI Version, HBTD8200D, HBTD8200F</p>
---	---