




HYTRONIK HC005S/BT Built-In Microwave Motion Sensor with Bluetooth 5.0 SIG Mesh Owner's Manual

[Home](#) » [HYTRONIK](#) » HYTRONIK HC005S/BT Built-In Microwave Motion Sensor with Bluetooth 5.0 SIG Mesh Owner's Manual 

HYTRONIK®



Built-in Microwave Motion Sensor with  Bluetooth® 5.0 SIG Mesh
HC005S/BT
ON/OFF CONTROL








Contents













- [1 Product Description](#)
- [2 App Features](#)
- [3 Hardware Features](#)
- [4 Technical Specifications](#)
- [5 Additional Information / Documents](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)

Product Description







HC005S/BT is a Bluetooth built-in microwave motion sensor with ON/OFF control. It is designed for professional lighting manufactures who would like to incorporate wireless control into their luminaires. HC005S/BT is suitable for any typical indoor applications such as office, classroom, car park, warehouse and other commercial/industrial areas. With Bluetooth wireless mesh networking, it makes communication much easier without any hardwiring, which eventually adds values to luminaires and saves costs for projects. Meanwhile, simple device setup and commissioning can be done via **Koolmesh** app.

App Features

	Quick setup mode & advanced setup mode
	Floorplan feature to simplify project planning
	Web app/platform for dedicated project management
	Koolmesh Pro iPad version for on-site configuration
	Grouping luminaires via mesh network
	Scenes
	Detailed motion sensor settings
	Dusk/Dawn photocell (Twilight function)
	Schedule to run scenes based on time and date
	Astro timer (sunrise and sunset)
	Staircase function (primary & secondary)

	Compatible with EnOcean BLE switches
	Internet-of-Things (IoT) featured
	Device firmware update over-the-air (OTA)
	Device social relations check
	Bulk commissioning (copy and paste settings)
	Power-on status (memory against power loss)
	Offline commissioning
	Different permission levels via authority management
	Network sharing via QR code or keycode
	Remote control via gateway support HBGW01
	Interoperability with Hytronik Bluetooth product portfolio
	Continuous development in progress...

Hardware Features

	Photocell Advance
	ON/OFF control with load ratings of: – 300VA (capacitive) – 400W (resistive)
	Compact design
	Zero crossing detection circuit to reduce in-rush current and prolong relay lifetime
	Loop-in and loop-out terminals for efficient installation
	5-year warranty



for iOS

<https://apps.apple.com/cn/app/koolmesh/id1483721878>



for Android

<https://play.google.com/store/apps/details?id=com.koolmesh.sig>


Smartphone app for both iOS & Android platform



for iPad

<https://apps.apple.com/cn/app/koolmesh/id1570378349>

Koolmesh Pro app for iPad

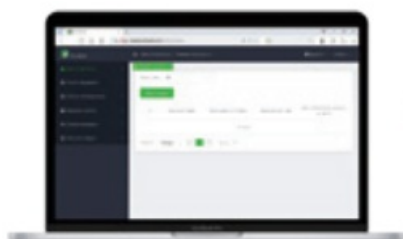




for Web
<http://www.iot.koolmesh.com>

Web app/platform: www.iot.koolmesh.com



Fully support EnOcean self-powered switch module PTM215B (HBES01/W & HBES01/B)

Technical Specifications





Bluetooth Transceiver	
Operation frequency	2.4 GHz – 2.483 GHz
Transmission power	4 dBm
Range (Typical indoor)	10~30m
Protocol	 Bluetooth® 5.0 SIG Mesh
Sensor Data	
Sensor principle	High Frequency (microwave)
Operation frequency	5.8GHz+/-75MHz
Transmission power	0.2mW
Detection range	Max installation height 6m Max detection range 10m (diameter)
Detection angle	30°~150°
Environment	
Operation temperature	Ta: -20° C ~ +50° C
Case temperature(MAX.)	Tc:+75°
IP rating	IP20

Input & Output Characteristics

Stand-by power	<1W
Operating voltage	220~240VAC 50/60Hz
Load ratings	300VA(capacitive),400W(resistive)
Warming-up	20s
Safety & EMC	
EMC standard (EMC)	EN55015, EN61000, EN61547
Safety standard (LVD)	EN60669-1/2-1 AS/NZS 60669-1/-2-1
Radio Equipment (RED)	EN300400, EN301489-1/-3 EN301489-17, EN62479, EN300328
Certification	Semko,CB, CE , EMC, RED, RCM


* The detection range is heavily influenced by sensor placement (angle) and different walking paces. It may be reduced under certain conditions.

Mechanical Structure & Dimensions

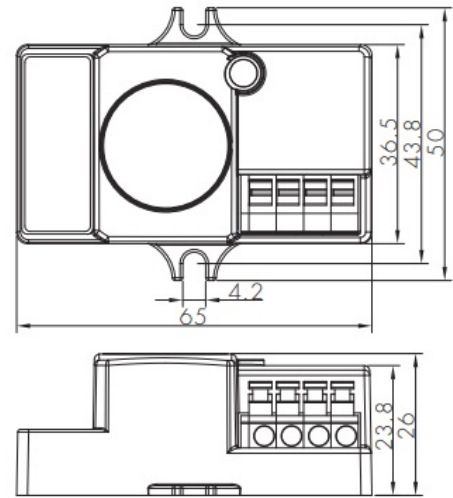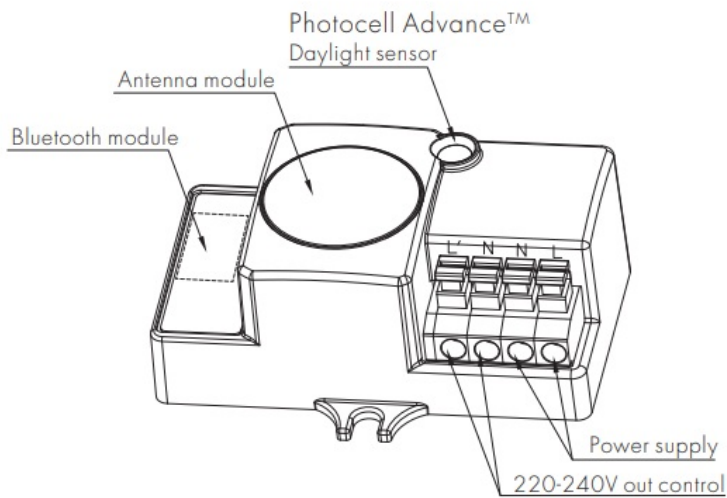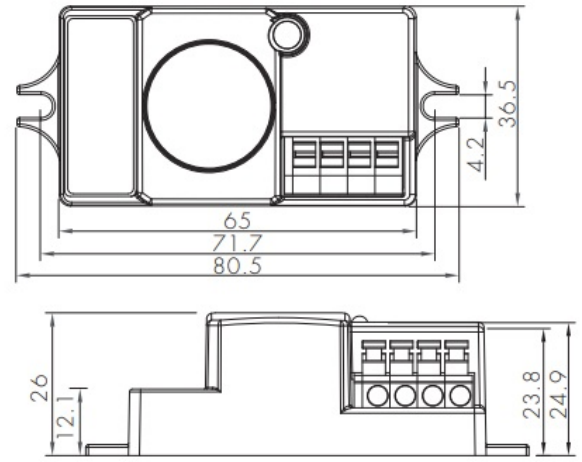
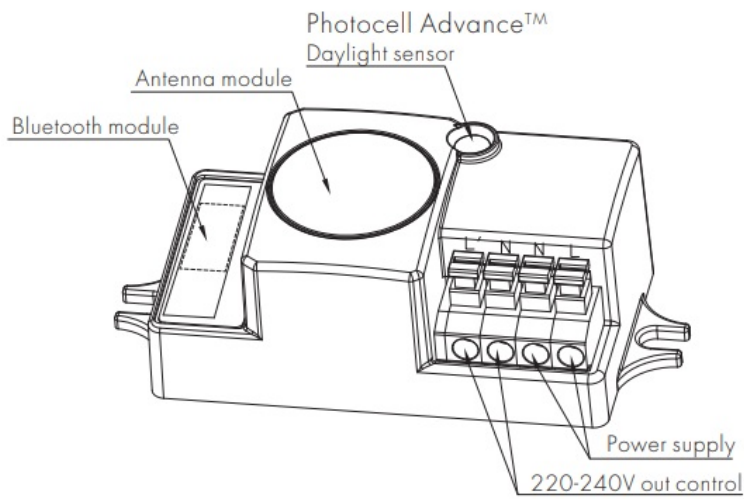


Sensor Installation: In order to ensure good product performance, please avoid sensor being installed at or well below the LED gear tray/aluminum plate. It is highly recommended to expose the antenna part and Photocell Advance™ daylight sensor part by making a cut-out hole. For the Bluetooth module part, the cut-out hole is also recommended when the luminaire design is in a very confined metal environment where the Bluetooth signal transmission can be potentially blocked or affected.

Wiring Diagram

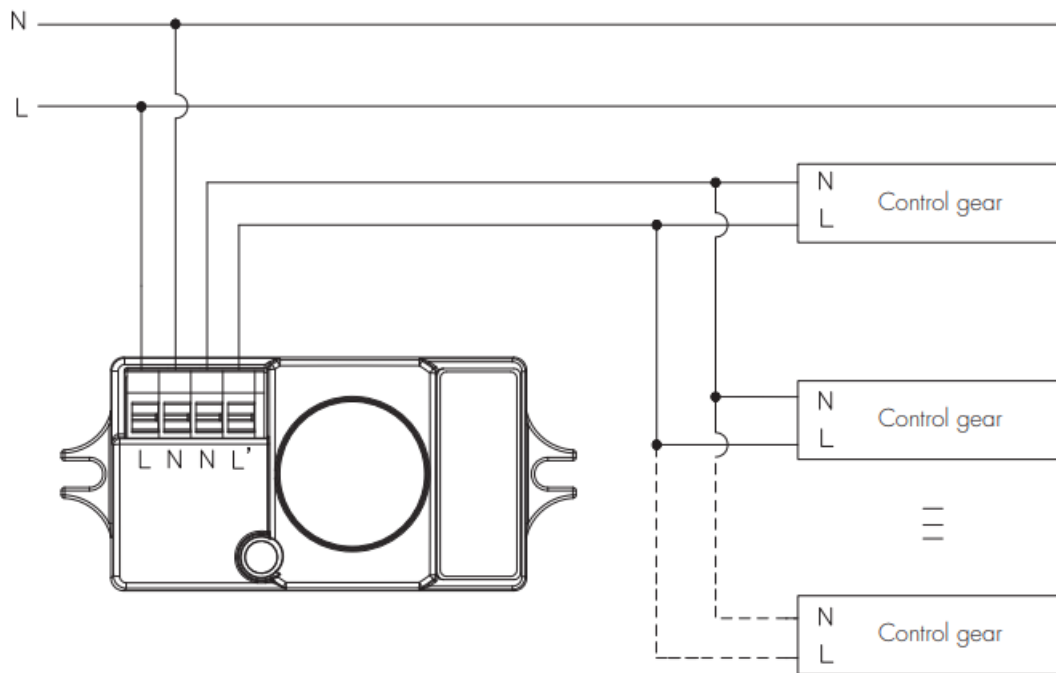


Detection Pattern

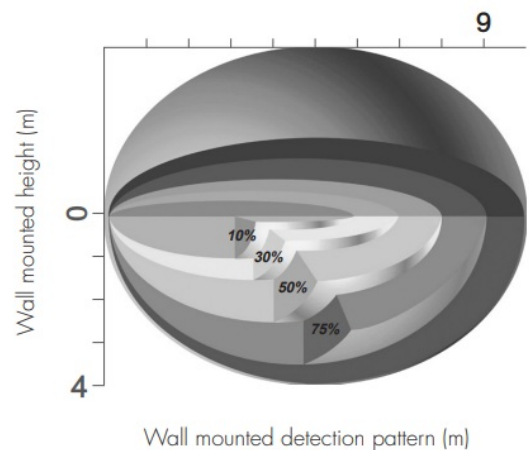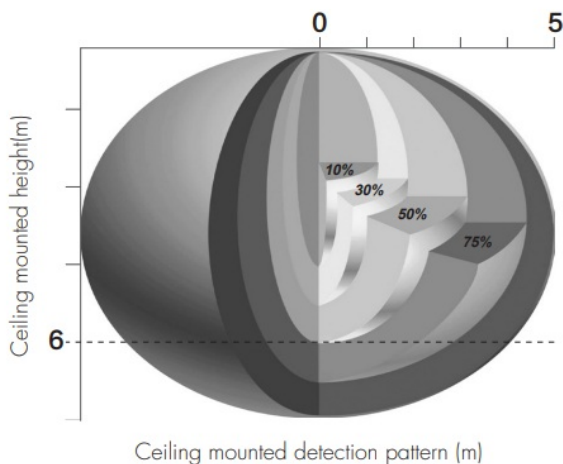

Additional Information / Documents

1. For full explanation of Hytronik Photocell Advance™ technology, please kindly refer to www.hytronik.com/download ->knowledge ->Introduction of Photocell Advance
2. To learn more about detailed product features/functions, please refer to www.hytronik.com/download ->knowledge ->Introduction of App Scenes and Product Functions
3. Regarding precautions for Bluetooth product installation and operation, please kindly refer to www.hytronik.com/download ->knowledge ->Bluetooth Products – Precautions for Product Installation and Operation
4. Regarding precautions for microwave sensor installation and operation, please kindly refer to www.hytronik.com/download ->knowledge ->Microwave Sensors – Precautions for Product Installation and Operation
5. Data sheet is subject to change without notice. Please always refer to the most recent release on www.hytronik.com/products/bluetooth technology ->Bluetooth Sensors
6. Regarding Hytronik standard guarantee policy, please refer to www.hytronik.com/download ->knowledge ->Hytronik Standard Guarantee Policy

Documents / Resources

	<p>HYTRONIK HC005S/BT Built-In Microwave Motion Sensor with Bluetooth 5.0 SIG Mesh [pdf] Owner's Manual</p> <p>HC005S-BT, HC005S BT, Built-In Microwave Motion Sensor with Bluetooth 5.0 SIG Mesh, HC005S BT Built-In Microwave Motion Sensor with Bluetooth 5.0 SIG Mesh, Built-In Microwave Motion Sensor, Microwave Motion Sensor, Motion Sensor, Sensor</p>
---	---

References

- [Catalogue_Hytronik](#)
- [iot.koolmesh.com](#)

Manuals+.