



iClever GK03 Wireless Keyboard and Mouse Combo User Manual

[Home](#) » [iclever](#) » iClever GK03 Wireless Keyboard and Mouse Combo User Manual 

Contents

- [1 iClever GK03 Wireless Keyboard and Mouse Combo](#)
- [2 Specification of Keyboard](#)
- [3 Product Overview for Keyboard](#)
- [4 Charging the Keyboard](#)
- [5 Keys and Functions](#)
- [6 Pairing Steps](#)
- [7 Device Requirement](#)
- [8 FAQ](#)
- [9 Contact](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)
- [11 Related Posts](#)



iClever GK03 Wireless Keyboard and Mouse Combo



\$Package Contents

- 1 x 2.4G Keyboard
- 1 x 2.4G Mouse
- 1 x Charging Cable
- 1 x USB Receiver (it is stored at the bottom of the mouse)
- 1 x User Manual

Specification of Keyboard

Dimensions	438.5 x 129 x 18.61mm / 17.26 x 5.08 x 0.73 in
Operating Range	<10m/32.8ft
Charge Time	< 2 hours
Uninterrupted Work Time	90 hours
Lithium Battery Capacity	280 mAh
Key Life	3 million clicks
Standby Time	90 days


- **Frequency band:** 2402 MHz~2480 MHz
- **Maximum transmission power:** 0 dBm

Specification of Mouse

Dimensions	107.5 x 60 x 27.5 mm/ 4.23 x 2.36 x 1.08 in
Operating Range	< 10 m / 32.8 ft
Power Source	2 x MA Batteries (not included)
Uninterrupted Work Time	160 days
Button Life	3 million clicks
DPI	800-1200-1600(1200 default)

- **Frequency band:** 2402 MHz~2480 MHz
- **Maximum transmission power:** 0 dBm

Product Overview for Keyboard

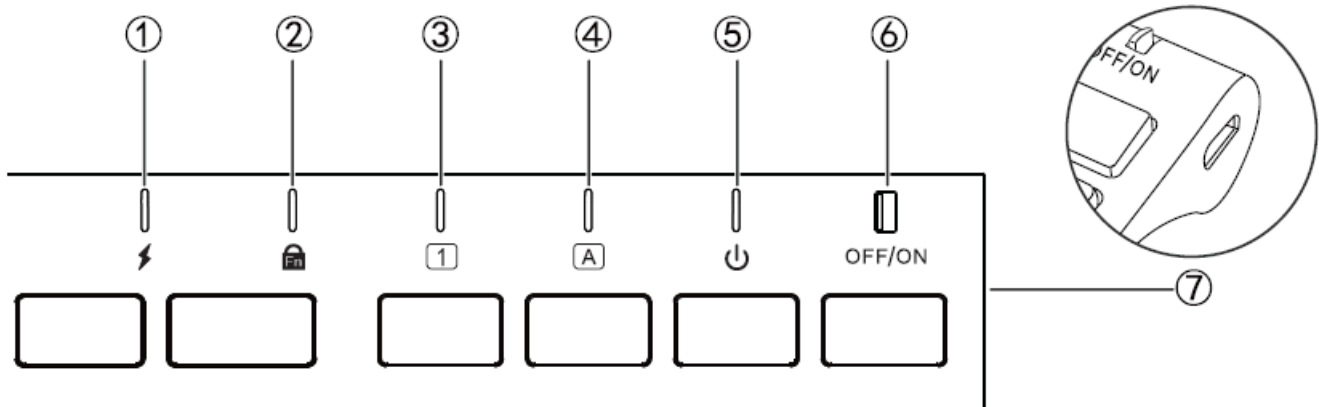

1. Charging Indicator:

- Stay in red while charging and turn off after fully charging.

2. Fn Lock Indicator:

- Press the “fn” + Esc” keys to activate or cancel the Fn lock function.
- When the indicator is green, the fn lock function is on.

3. Number Lock Indicator:

- Press the “num” key to activate or cancel the number lock function.
- When the indicator is on, the number lock function is activated.

4. Caps Lock Indicator:

- Press the “caps lock” key to switch between uppercase and lowercase.


5. Power Indicator:

- When power on the keyboard, the indicator will be on for 3s.
- When power is low, the indicator will keep flashing.

6. Power Switch: slide “ON”/ “OFF” to turn on/off the keyboard.

7. Charging Port: for charging.

Product Overview for Mouse

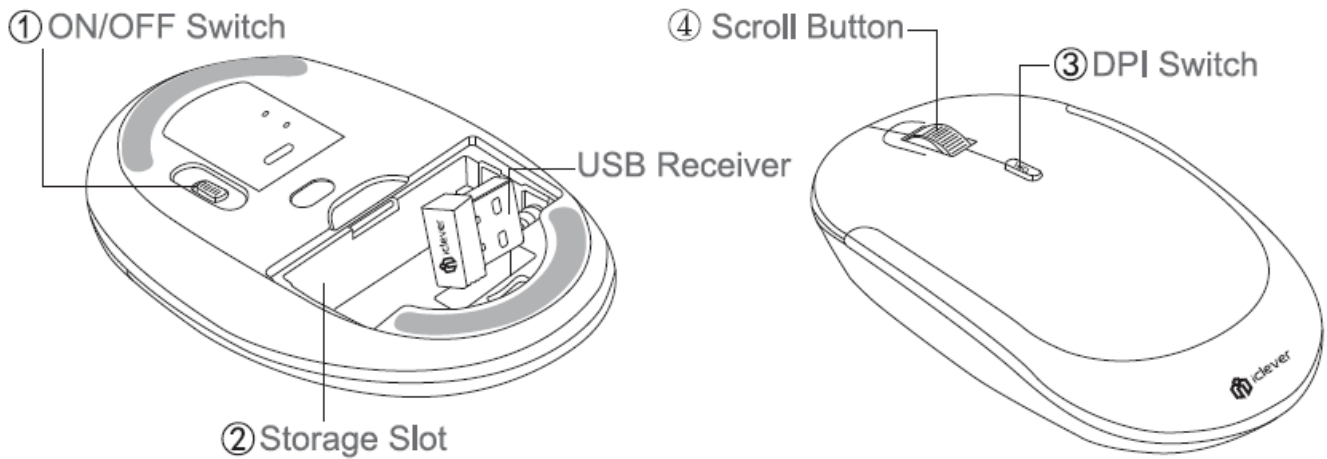

1. **ON/OFF Switch:** move right to turn on and left to turn off the mouse.
2. **Storage Slot:** used to store the USB Receiver and hold two AAA batteries (not included).
3. **DPI Switch:** 3 levels of DPI are adjustable (1000/1200/1600), to change the cursor sensitivity by clicking the DPI Switch button (the higher the DPI, the higher the sensitivity in cursor moving).
4. **Scroll Button:** for scrolling.

Charging the Keyboard













- Charge the keyboard by including a Micro USB cable; the charging indicator will glow in red while in charging and turn off after fully charged.
- **(Note:** output is DC5.0V/200mA; USB charger is not included)










Sleep Mode

- The keyboard and mouse will enter sleep mode if idle for 10 minutes.
- Press any key to exist in sleep mode.

Keys and Functions













- The table below describes special key combinations for Windows and Mac OS.
- For all the media keys to work as normal, before using, please press the keys “fn”+ “Q” to Mac OS or “fn”+ “W” to Windows.


Function Keys	Windows Media	Windows F-Keys	Mac OS Media	Mac OS F-Keys
Guide to use	Press "fn" +	Press directly	Press "fn" +	Press directly
 F1	Brightness - (win 10)	F1	Brightness -	F1
 F2	Brightness + (win 10)	F2	Brightness +	F2
 F3	Web browser	F3	Mission Control	F3
 F4	App Switch	F4	App Switch	F4
 F5	Search	F5	Search	F5
 F6	Previous Track	F6	Previous Track	F6
 F7	Play/pause	F7	Play/pause	F7
 F8	Next Track	F8	Next Track	F8
 F9	Mute	F9	Mute	F9
 F10	Volume -	F10	Volume -	F10
 F11	Volume +	F11	Volume +	F11
 F12	Screenshot	F12	Screenshot	F12

Special Keys	Descriptions
	Your keyboard has by default access to the F-keys(F1~F12). If you prefer to have direct access to your media and hotkeys such as mute, volume up, play/pause, and so on, simply press "fn" + "esc" to activate fn lock function on your keyboard to swap them.
	Press keys of "fn" + "Q", the system will switch to Mac OS.
	Press keys of "fn" + "W", the system will switch to Windows.
	The "fn" key is used in combination with other keys to access special features.
	It works as "win" when system is switched to Windows; it works as "option" when system is switched Mac OS.
	It works as "alt" when system is switched to Windows; it works as "cmd" when system is switched to Mac OS.
	It works as "alt gr" when system is switched to Windows; it works as "cmd" when system is switched to Mac OS.
	It works as "ctrl" when system is switched to Windows; it works as "option", when system is switched to Mac OS.
	It works as "number lock" when system is switched to Windows; it works as "clear" when system is switched to Mac OS.

Gray Keys

- Gray Keys are used for Mac OS users.
- Before using, please press change the input method to British (not PC-Brit-ish). You can press critrspace keys to change the input method.

Gray Key	Mac OS	Gray Key	Mac OS
	§	Shift+ 	±
	\	Shift+ 	
Shift+ 	@	 + 	€
 + 	#	Shift+ 	"
	,	Shift+ 	~

- Note:**  this means to press this key directly. Shift + related key means press shift and related keys simultaneously.

Pairing Steps

For Windows users:

- **Step 1.** Remove the USB Receiver from the bottom of the mouse and insert two AAA batteries into the slot (AAA batteries are not included).
- **Step 2.** Move the mouse ON/OFF switch to “ON” to turn on the mouse.
- **Step 3.** Plug the USB Receiver into the port of the computer.
- **Step 4.** Move the keyboard power switch to “ON” to turn on the keyboard.
- **Step 5.** Press the keys “fn” + “W” to switch to the Windows layout.
- **Step 6.** Done, ready to use.

Tips

- Keep away from oil, chemicals, liquids, and snacks.
- Keep away from sharp objects.
- Keep away from metal and other sources of wireless signal.

For Mac OS users:

- **Step 1.** Remove the USB Receiver from the bottom of the mouse and insert two AAA batteries into the slot (AAA batteries are not included).
- **Step 2.** Move the mouse ON/OFF switch to “ON” to turn on the mouse.
- **Step 3.** Plug the USB Receiver into the USB-A port of the computer or a hub.
- **NOTE:** if your Mac has a USB-C port, please connect it to a hub.
- **Step 4.** Move the keyboard power switch to “ON” to turn on the keyboard.
- **Step 5.** Press keys “fn” + “Q” to switch to the Mac layout.
- **Step 6.** Done, ready to use.
- If fail to connect, please read the FAQ and follow as below:

A. Keyboard re-pairing guide

- **Step 1.** Plug out the USB receiver from the computer port.
- **Step 2.** Turn off the keyboard, and then turn it on.
- **Step 3.** Press the keys “esc” + “Q” simultaneously, and the power indicator will flash green quickly.
- **Step 4.** Plug the 2.4G USB receiver into the computer within 10 seconds and keep the keyboard close to the USB Receiver within 30cm (0.98ft).
- **Step 5.** With the re-pairing success, the power indicator will flash 3 times and then be off.

B. Mouse re-pairing guide

- **Step 1.** Plug out the USB receiver from the computer port.
- **Step 2.** Move the mouse ON/OFF switch to “OFF” to turn off the mouse.
- **Step 3.** Hold the mouse’s right key and scroll the button for 3 seconds.

- **Step 4.** Move the mouse ON/OFF switch to “ON” to turn on the mouse.
- **Step 5.** Plug the USB Receiver into the computer within 10 seconds and keep the mouse close to the receiver within 30cm(0.98ft).
- **Step 6.** Move the mouse to test whether it is working or not.
- **Note:** If still fail to connect, please try the above guide again or email us.

Device Requirement

- **Windows** 7/8/10 PC and laptop
- **Mac with USB-A** port or hub

Note:

1. It is not fully compatible with Mac mini, smart TV, and Xbox.
2. If your Mac is a USB-C port, please try to connect it by a hub. extender or something similar.

FAQ

Keyboard/Mice – Buttons or keys do not work correctly.

Possible solutions:

1. Restart your PC/laptop and iClever Keyboard/mouse.
2. Clean the button/key with compressed air.
3. Verify the product or receiver is connected directly to the computer and not to a hub, extender, switch, or something similar.
4. Windows only — try a different USB port.
5. Try on a different USB port or a different computer.

Delay when using the device/connection drops/cannot connect at all/ device doesn't wake up the computer after sleep.

Possible solutions:

1. Restart your PC/laptop and iClever keyboard.
2. Verify the product or receiver is connected directly to the computer and not to a hub, extender, switch, or something similar.
3. Move the device closer to the USB receiver. If your receiver is in the back of your computer, it may help to relocate the receiver to a front port. In some cases the receiver signal gets blocked by the computer case, causing a delay.
4. Keep other electrical wireless devices away from the USB receiver to avoid interference.
5. Charge the keyboard for 30 minutes and replace the new AAA batteries for the mouse.
6. Windows only — check if any Windows updates are running in the background that may cause the delay.
7. Mac only — check if any background updates may cause the delay.
8. Try on a different USB port or try on a different computer.

How to Fix Keyboard Typing Multiple Letters on Windows.

Click the win key> Settings> Ease of Access> Keyboard> find “Use Filter Keys” and turn it on.


How to Fix Keyboard Typing Multiple Letters on Mac

1. On a Mac, choose the Apple menu > “System Preferences”, click Keyboard”, and choose the Keyboard tab.
2. Locate the “Key Repeat” slider setting and adjust it to the “Off” position.

Contact

- Email: support@iclever.com
 - Hereby, [Thousandshores Deutschland GmbH] declares that the radio equipment type [2.4G Keyboard and 2.4G Mouse, IC-GK03] complies with Directive 2014/53/EU.
 - The full text of the EU declaration conformity is available at the following internet address:
<http://files.iclever.com/ic-gk03-uk-doc.pdf>
 - Learn more about the UK Declaration of Conformity, please click the below link to download
<http://files.iclever.com/ic-gk03-uk-doc.pdf>
-

Documents / Resources

	iClever GK03 Wireless Keyboard and Mouse Combo [pdf] User Manual GK03 Wireless Keyboard and Mouse Combo, GK03, Wireless Keyboard and Mouse Combo, Keyboard and Mouse Combo, Mouse Combo, Combo
---	---

References

- [User Manual](#)